


MODELS:
EUG3

ELECTRICAL RATINGS:

Item	Model	Input Voltage	Power Factor	Watt	Input Current
A	EUG3730K-120-WH	120VAC	≥0.93	7W	0.065A

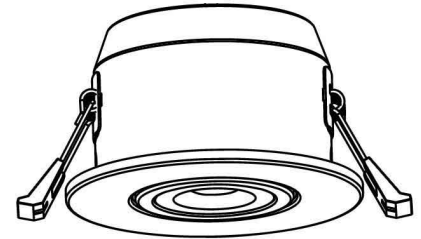

WARNINGS

READ ALL INSTRUCTIONS BEFORE INSTALLING FIXTURE. RETAIN FOR FUTURE REFERENCE

FOR YOUR SAFETY, THIS FIXTURE MUST BE WIRED IN ACCORDANCE TO LOCAL ELECTRICAL CODES AND OR DISTANCES. ALL WORK SHOULD BE DONE BY A QUALIFIED ELECTRICIAN.

MAKE CERTAIN POWER IS OFF FROM THE ELECTRICAL PANEL BEFORE STARTING INSTALLATION OR ATTEMPTING ANY MAINTENANCE. INDOOR INSTALLATION ONLY.

INSTALLATION

TOOLS REQUIRED:

1. Saw
2. Measuring Tape
3. Electrical Wiring (use type and gang suitable for application only.)

PRE-INSTALLATION:





1. Turn power OFF from the electrical panel before starting installation.
2. Locate a suitable position to place the fixture and drill/saw in accordance to the cut-hole dimensions (refer to Hole Cut Table for appropriate size).
3. Run electrical wire from the switch to the power supply through the mounting hole-use NMD90 Romex or BX cable.

Hole Cut Size	
EDL330-B	Ø = 3 1/2" (88mm)

INSTALLATION

DRIVER WIRING:

1. Open the hardwire box swing cover and remove the appropriate knockout(s).
 2. Insert the electrical supply cable through the knockout and secure with a cable connector (sold separately).
 3. Using wire nuts, connect green ground wire of cable to green wire on box. Connect white wire of cable to white wire of box. Connect black wire of cable to black wire of box. (Fig.1)
 4. Place all wiring and connections back in to the box and close the cover.
 5. Insert hardwire box through the mounting hole. (Fig.2)
- **New construction applications:** Hardwire box shall be firmly secured to studs, joists, or similar fixed structural units.
 - **Remodel applications:** Do not require the hardwire box to be frame secured after the mounting plates, studs, joists, or structural units have been concealed.

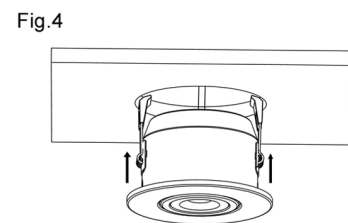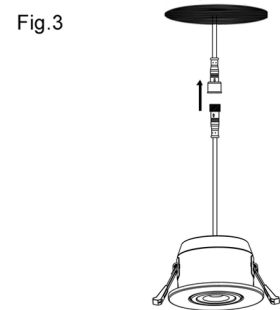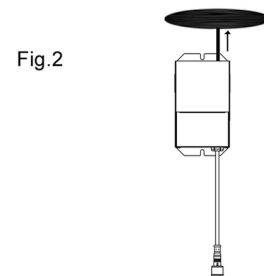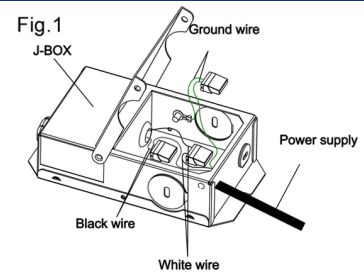

FIXTURE INSTALLATION:

1. Connect the fixture to the hardwire box by inserting and twisting the male/female connectors. (Fig.3)
2. Push spring loaded clips on the fixture upwards and insert fixture base in to the mounting hole. Release the clips and fixture will be pulled flush to the ceiling. (Fig.4)
3. Once assembly is complete, turn on power to confirm fixture is working properly.

COMMISSIONING

Once installed please ensure that the luminaire is firmly fixed via the method used, and ensure that the wires are connected correctly before energizing the supply conductors.

Turn the power on, and check to ensure the luminaire works as intended. If not, de-energize and check connections, and contact your local dealer.