


Project:	
Location:	
Model#: ROL5330K-24V-SS1	Type:
Client:	Qty:
Prepared by:	Date:


**SERIES SPECIFICATIONS**

Highlight architectural features or add emphasis to landscaping. The IP67 rated a die-cast Aluminium housing make this fixture built to last. Suitable for dimming with TamLite controls.



**PERFORMANCE SPECIFICATIONS**

**Luminance Distribution Chart**

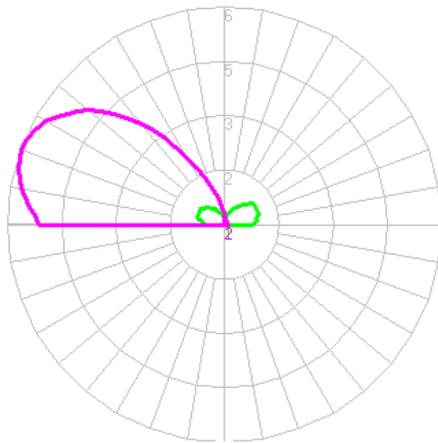

**Initial Lumen Output:** 10  
**Ambient Operating Temp:** -20C to +40C


**Environmental Rating(s):** IP67  
**Limited Product Warranty:** 3 Year(s)

**UL Classification:** Wet Location Listed

<b>Project:</b>	
<b>Location:</b>	
<b>Model#:</b> ROL5330K-24V-SS1	<b>Type:</b>
<b>Client:</b>	<b>Qty:</b>
<b>Prepared by:</b>	<b>Date:</b>

**LED SPECIFICATIONS**

**SPD**

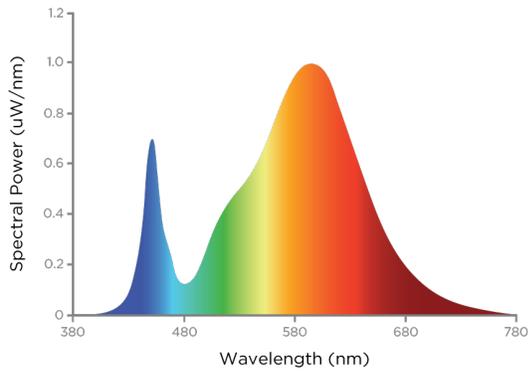

**Source Type:** LED

**Colour Temperature:** 3000K

**ELECTRICAL SPECIFICATIONS**

**Input Voltage:** 24Vdc

**Dimming:** Suitable for dimming with TamLite Controls

**Fixture Draw:** 3.00 W

**Over Temperature Protection:** Auto recovery. Current returns to normal after over temperature is removed.

**Max On-Delay:** 1S

**PHYSICAL SPECIFICATIONS**

**Finish Colour:** Chrome Plated Stainless Steel

**Housing Material:** Die-cast Aluminium

**Wiring:** IP67 rated connections by others

**Mounting:** Recessed In-ground

**SHIPPING INFORMATION**

**Ordering Code(s):** ROL5330K-24V-SS1

**Box Weight:** .750 kg

**Box Quantity:** 1

**Box Dimensions (L-W-H):** 125 x 125 x 125 mm

Project:	
Location:	
Model#: ROL5330K-24V-SS1	Type:
Client:	Qty:
Prepared by:	Date:

LINE DRAWING

Line Drawings

