


Project:		
Location:		
Model#:	ROL5330K-24V-SS2	Type:
Client:		Qty:
Prepared by:		Date:

## SERIES SPECIFICATIONS




Highlight architectural features or add emphasis to landscaping. The IP67 rated a die-cast Aluminium housing make this fixture built to last. Suitable for dimming with Tamlite controls.



## PERFORMANCE SPECIFICATIONS

### Luminance Distribution Chart

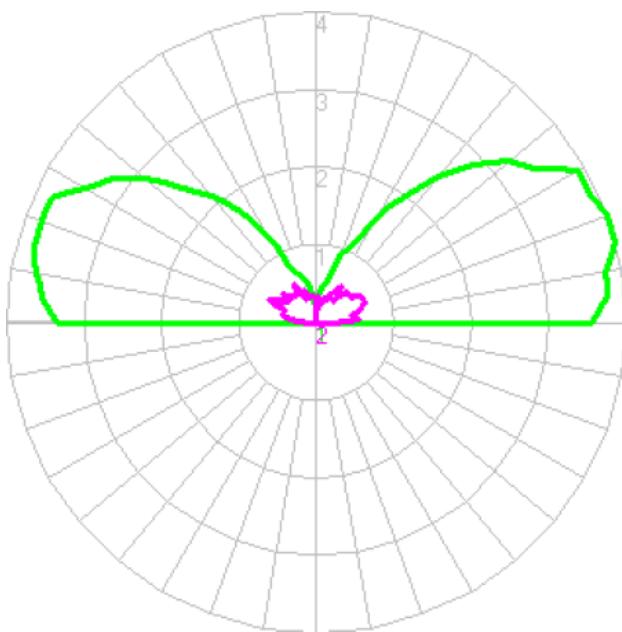

**Initial Lumen Output:** 10

**Ambient Operating Temp:** -20C to +40C


**Environmental Rating(s):** IP67

**Limited Product Warranty:** 3 Year(s)

**UL Classification:** Wet Location Listed

## LED SPECIFICATIONS

### SPD

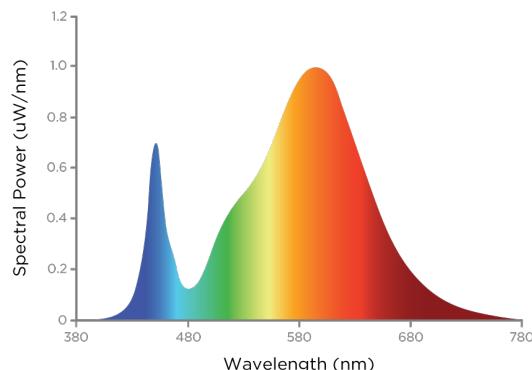

**Source Type:** LED

**Colour Temperature:** 3000K

## ELECTRICAL SPECIFICATIONS

**Input Voltage:** 24Vdc

**Dimming:** Suitable for dimming with  
Tamlite Controls

**Fixture Draw:** 3.00 W

**Over Temperature Protection:** Auto  
recovery. Current returns to normal after  
over temperature is removed.

**Max On-Delay:** 1S

## PHYSICAL SPECIFICATIONS

**Finish Colour:** Chrome Plated Stainless  
Steel

**Housing Material:** Die-cast Aluminium

**Wiring:** IP67 rated connections by others

**Mounting:** Recessed In-ground

## SHIPPING INFORMATION

**Ordering Code(s):** ROL5330K-24V-SS2

**Box Weight:** .750 kg

**Box Quantity:** 1

**Box Dimensions (L-W-H):** 125 x 125 x 125  
mm

## LINE DRAWING

### Line Drawings

