

Project:						
Location:						
Model#: AR-PS3R	Туре:					
Client:	Qty:					
Prepared by:	Date:					

SERIES SPECIFICATIONS



To supply Tamlite ARPS Series of LED fixtures as specified. The luminaire shall operate at and use a dimmable, constant current type driver. The housing shall be constructed of with a . All hardware to be stainless steel. Bottom access wiring compartment to be hinged and sealed with a durable foamed gasket. Fixtures to come standard with a NEMA7 style twist lock socket and shorting cap. Optics to be constructed of be sealed via captive gasket and complete with a LED's shall be as specified with a colour tolerance. Fixture shall be UL Safety US-CA listed.

PERFORMANCE SPECIFICATIONS

Certification Standards: UL Safety US- CCN Number: IFAM7.E359675

CA

SHIPPING INFORMATION


Box Quantity: 1 Box Weight: 0.5 kg





Project:							
Location:							
Model#: AR-PS3R	Туре:						
Client:	Qty:						
Prepared by:	Date:						

LINE DRAWING

Line Drawings



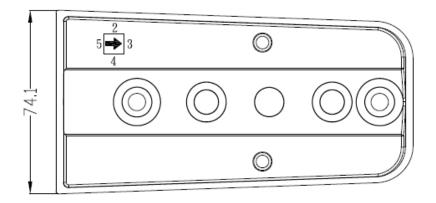



SERIES ARCHITECTURE

Series Architecture

ARPS														
Part Wattage		age	сст		Mounting		Optics		Voltage		Finish		Accessories	
ARPS	35	35W	30K	3000K	SQ	SQ Pole Mount	T2	Type II	UNV	120-277VAC	BZ	Bronze	[blank]	None
	75	75W	40K	4000K	3R	3" RD Pole	T2H	with House Side Shield	UN4	347VAC	BK	Black	0	Occupancy Sensor
	140	140W	50K	5000K	4R	4" RD Pole	Т3	Type III			WH	White	AR-N3PC-UNV	120VAC Photo control
	185	185W	AM	Amber	5R	5" RD Pole	ТЗН	with House Side Shield			CC	Custom	AR-N3PC-UN4	347VAC Photo control
					SF	Slip Fitter	T4	Type IV					AR-SPIKE	Bird Spike
							T4H	with House Side Shield					FSIR-100	Programming remote, sold seperately
							T5	Type V						
							T5H	with House Side Shield						