

|                 |       |
|-----------------|-------|
| Project:        |       |
| Location:       |       |
| Model#: AR-PS3R | Type: |
| Client:         | Qty:  |
| Prepared by:    | Date: |

## SERIES SPECIFICATIONS



To supply Tamlite ARPS Series of LED fixtures as specified. The luminaire shall operate at and use a dimmable, constant current type driver. The housing shall be constructed of a . All hardware to be stainless steel. Bottom access wiring compartment to be hinged and sealed with a durable foamed gasket. Fixtures to come standard with a NEMA7 style twist lock socket and shorting cap. Optics to be constructed of be sealed via captive gasket and complete with a LED's shall be as specified with a colour tolerance. Fixture shall be UL Safety US-CA listed.

## PERFORMANCE SPECIFICATIONS

**Certification Standards:** UL Safety US-CA

**CCN Number:** IFAM7.E359675


## SHIPPING INFORMATION

**Box Quantity:** 1

**Box Weight:** 0.5 kg

## LINE DRAWING

### Line Drawings

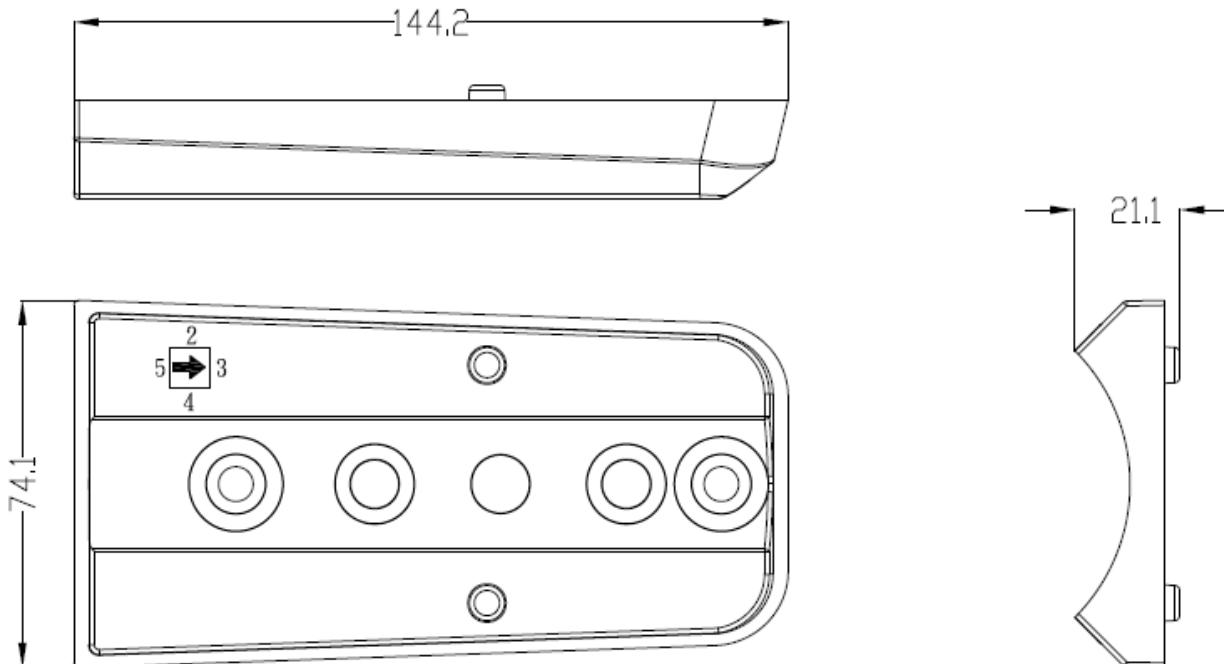

## SERIES ARCHITECTURE

### Series Architecture

| Part | Wattage |      | CCT |       | Mounting |               | Optics |                        | Voltage |            | Finish |        | Accessories |                                     |
|------|---------|------|-----|-------|----------|---------------|--------|------------------------|---------|------------|--------|--------|-------------|-------------------------------------|
| ARPS | 35      | 35W  | 30K | 3000K | SQ       | SQ Pole Mount | T2     | Type II                | UNV     | 120-277VAC | BZ     | Bronze | [blank]     | None                                |
|      | 75      | 75W  | 40K | 4000K | 3R       | 3" RD Pole    | T2H    | with House Side Shield | UN4     | 347VAC     | BK     | Black  | O           | Occupancy Sensor                    |
|      | 140     | 140W | 50K | 5000K | 4R       | 4" RD Pole    | T3     | Type III               |         |            | WH     | White  | AR-N3PC-UNV | 120VAC Photo control                |
|      | 185     | 185W | AM  | Amber | 5R       | 5" RD Pole    | T3H    | with House Side Shield |         |            | CC     | Custom | AR-N3PC-UN4 | 347VAC Photo control                |
|      |         |      |     |       | SF       | Slip Fitter   | T4     | Type IV                |         |            |        |        | AR-SPIKE    | Bird Spike                          |
|      |         |      |     |       |          |               | T4H    | with House Side Shield |         |            |        |        | FSIR-100    | Programming remote, sold separately |
|      |         |      |     |       |          |               | T5     | Type V                 |         |            |        |        |             |                                     |
|      |         |      |     |       |          |               | T5H    | with House Side Shield |         |            |        |        |             |                                     |