













Luminance Distribution Chart

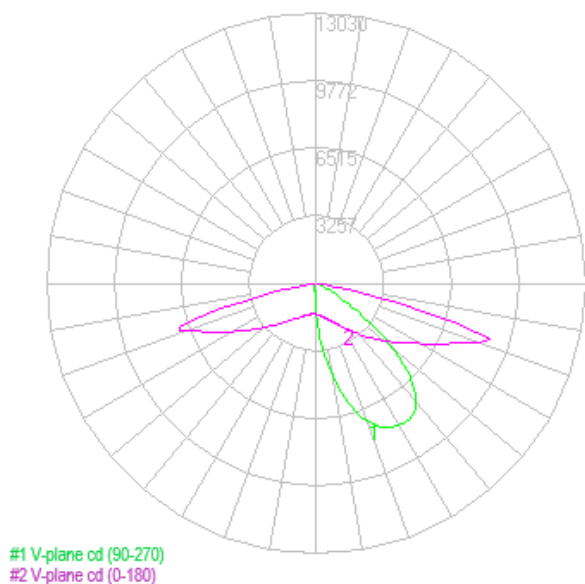


Isolux Diagram

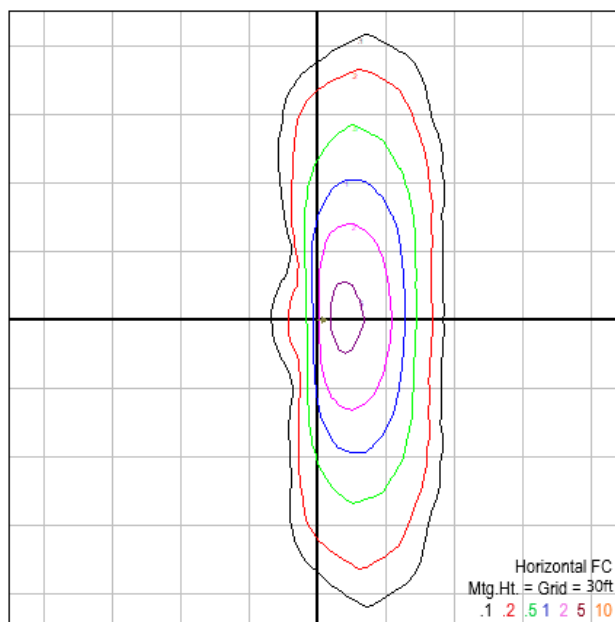



Project:	
Location:	
Model#: ARPS18530K3RT2H-UN4-BK	Type:
Client:	Qty:
Prepared by:	Date:

BUG Graph

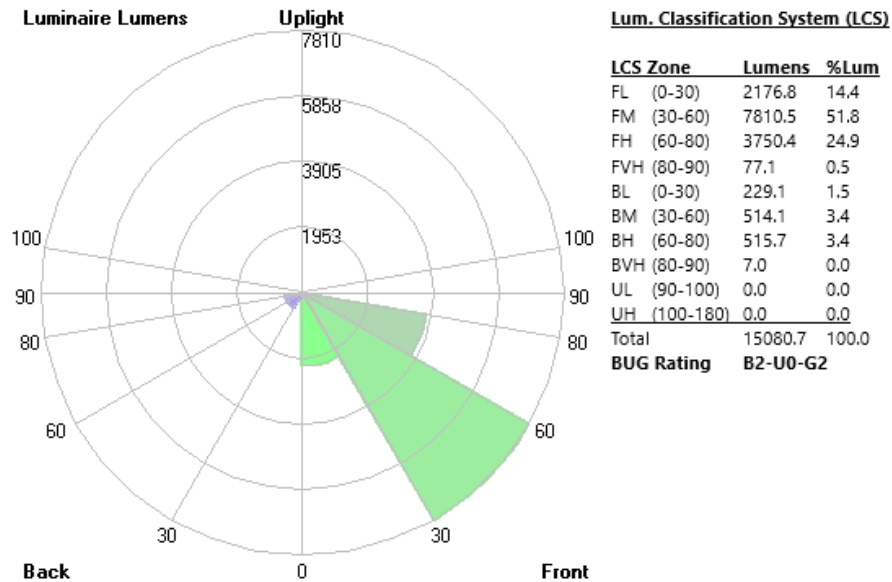

Initial Lumen Output: 15081lm

Luminaire Type: Type II-H - Medium

UL Classification: Wet Location Listed

CCN Number: IFAM7.E359675

Efficacy: 80lm/W

BUG Rating: B2-U0-G2

Ambient Operating Temp: -40C to +40C

Limited Product Warranty: 10 Year(s)

Max Candela: 13029cd (80H, 72V)

Environmental Rating(s): IP66

Certification Standards: UL Safety US-CA


Project:	
Location:	
Model#: ARPS18530K3RT2H-UN4-BK	Type:
Client:	Qty:
Prepared by:	Date:

LED SPECIFICATIONS

R Tables

R1	73	R9	0
R2	77	R10	46
R3	80	R11	76
R4	76	R12	50
R5	74	R13	73
R6	70	R14	89
R7	80	R15	67
R8	61	--	--

SPD

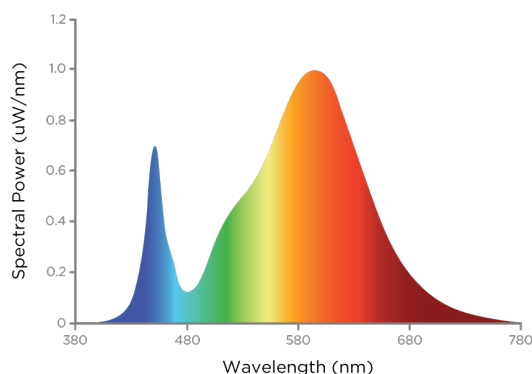

Source Type: LED

CRI: >70

Chromaticity: x=0.4338 y=0.4030

Manufacturer: Nichia®

L70: 60000 Hrs

Colour Tolerance: 3 SDCM

Part Number: NVSW219

Colour Temperature: 3000K

Duv: 0.006

ELECTRICAL SPECIFICATIONS

Driver Manufacturer: Inventronics®

Input Frequency: 50-60Hz

Inrush Current: 1.3 A2S

Power Factor @347Vac: >.90

Max Operating Case Temperature: 90C

Dimming Current mA: .45mA

Driver Certifications: c-RU-us Class 2,

FCC Part 15 Class B, RoHS

Driver Part Number: ESD-240SxxxDT

Fixture Draw: 194.3W

Max On-Delay: < 1.5 S

THD @347Vac(%): <10%

Surge Suppression: 10kV

Over Temperature Protection: Auto recovery. Current returns to normal after over temperature is removed.

Input Voltage: 347Vac

Current Draw@347Vac: 0.5599

Auxiliary Control: 12 VDC

Driver MTBF: 209,000hrs

Dimming: 1-10Vdc, (10% Min Light Level)

Short Circuit Protection: Auto recovery.

The output shall return to normal when the fault condition is removed.

PHYSICAL SPECIFICATIONS

Finish Colour: Black (RAL-9011)

Mounting: 3" round pole

Lens Type: clear optics

Entries: gasketed wire entry

Finish Type: Textured powder coat over chromate conversion coat

Housing Material: ADC12 aluminium

Weight: 8.1 kg

Wiring: internal junction

Lens Material: PMMA

EPA: 0.1932

Project:	
Location:	
Model#: ARPS18530K3RT2H-UN4-BK	Type:
Client:	Qty:
Prepared by:	Date:

SHIPPING INFORMATION

OrderingCode(s): ARPS1853KT2H-UN4-BK, AR-PSSQ-BK, AR-PS3R5R-BK


Box Weight: 8.1 kg

Box Quantity: 1

Box Dimensions (L-W-H): 695 x 340 x 180 mm

LINE DRAWING

Line Drawings

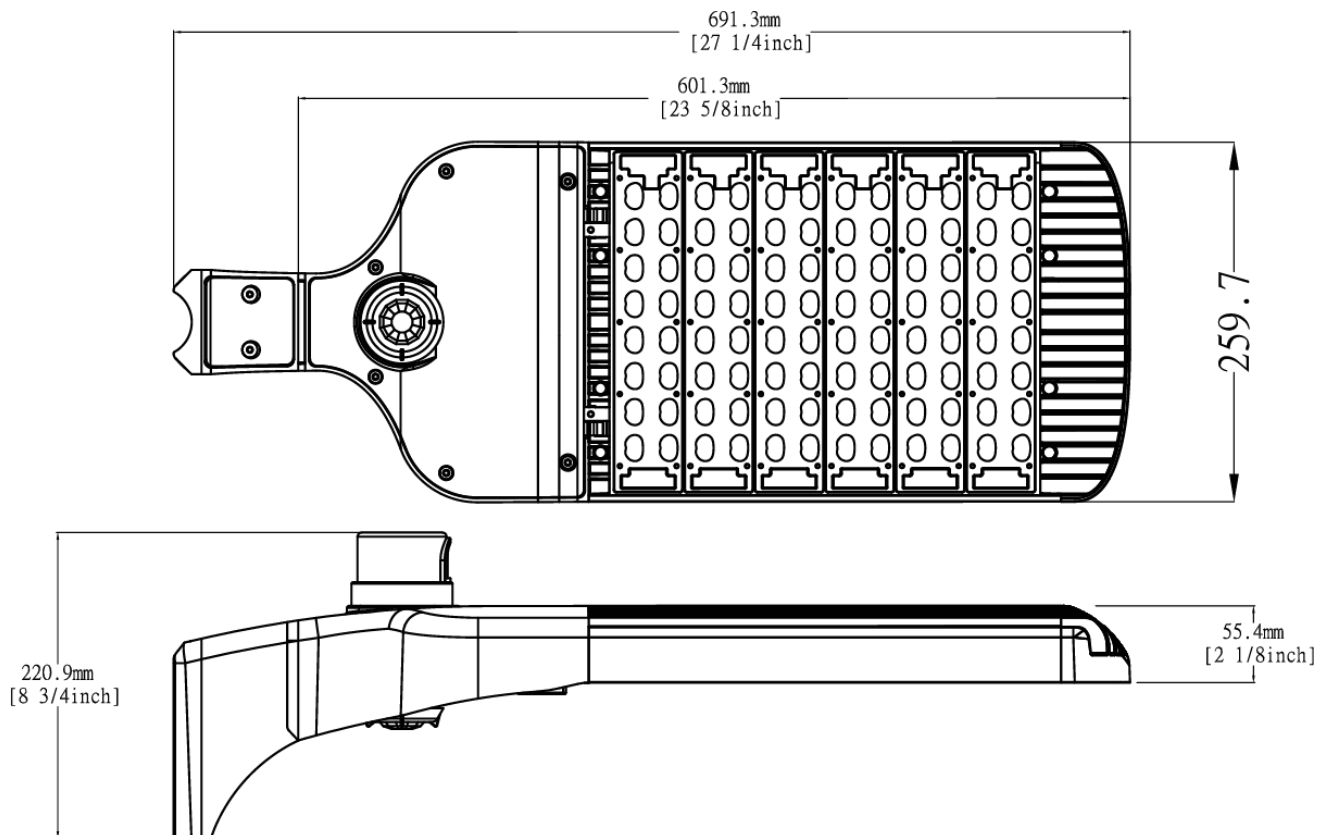



Project:	
Location:	
Model#: ARPS18530K3RT2H-UN4-BK	Type:
Client:	Qty:
Prepared by:	Date:

SERIES ARCHITECTURE

Series Architecture

ARPS

Part	Wattage		CCT		Mounting		Optics		Voltage		Finish		Accessories	
ARPS	35	35W	30K	3000K	SQ	SQ Pole Mount	T2	Type II	UNV	120-277VAC	BZ	Bronze	[blank]	None
	75	75W	40K	4000K	3R	3" RD Pole	T2H	with House Side Shield	UN4	347VAC	BK	Black	O	Occupancy Sensor
	140	140W	50K	5000K	4R	4" RD Pole	T3	Type III	WRV	120-347VAC	WH	White	AR-N3PC-UNV	120VAC Photo control
	185	185W	AM	Amber	5R	5" RD Pole	T3H	with House Side Shield			CC	Custom	AR-N3PC-UN4	347VAC Photo control
					SF	Slip Fitter	T4	Type IV					AR-SPIKE	Bird Spike
							T4H	with House Side Shield					FSIR-100	Programming remote, sold seperately
							T5	Type V						
							T5H	with House Side Shield						

Optional Extras: AR-SPIKE AR-N3PC-UNV