

|                                |       |
|--------------------------------|-------|
| Project:                       |       |
| Location:                      |       |
| Model#: ARPS18530K3RT2H-UN4-BK | Type: |
| Client:                        | Qty:  |
| Prepared by:                   | Date: |

## SERIES SPECIFICATIONS




To supply Tamlite ARPS Series of LED fixtures as specified. The luminaire shall operate at 347Vac and use a 1-10Vdc, (10% Min Light Level) dimmable, constant current type Inventronics® driver. The housing shall be constructed of ADC12 aluminium with a Textured powder coat over chromate conversion coat. All hardware to be stainless steel. Bottom access wiring compartment to be hinged and sealed with a durable foamed gasket. Fixtures to come standard with a NEMA7 style twist lock socket and shorting cap. Optics to be constructed of PMMA be sealed via captive gasket and complete with a clear optics LED's shall be as specified Nichia® NVSW219 with a 3 SDCM colour tolerance. Fixture shall be UL Safety US-CA listed.




## PERFORMANCE SPECIFICATIONS

Luminance Distribution Chart

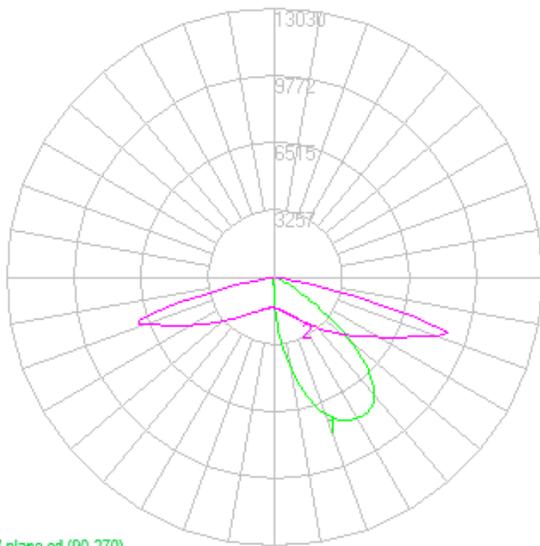

#1 V-plane cd (90-270)  
#2 V-plane cd (0-180)


Isolux Diagram

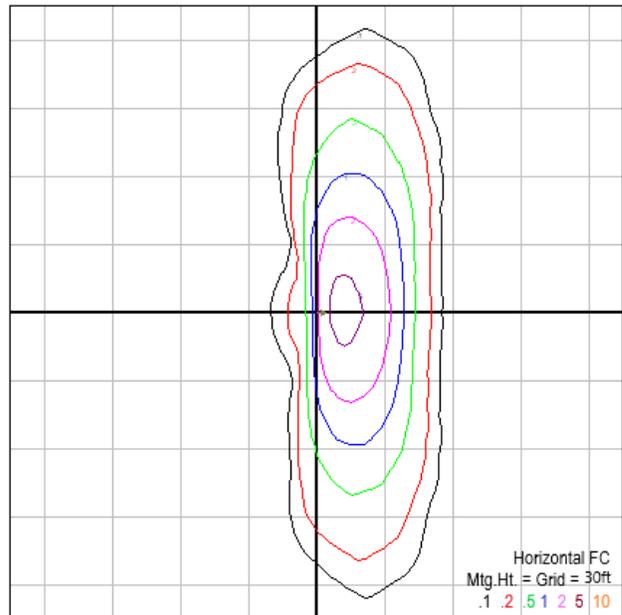



|                                |       |
|--------------------------------|-------|
| Project:                       |       |
| Location:                      |       |
| Model#: ARPS18530K3RT2H-UN4-BK | Type: |
| Client:                        | Qty:  |
| Prepared by:                   | Date: |

**BUG Graph**

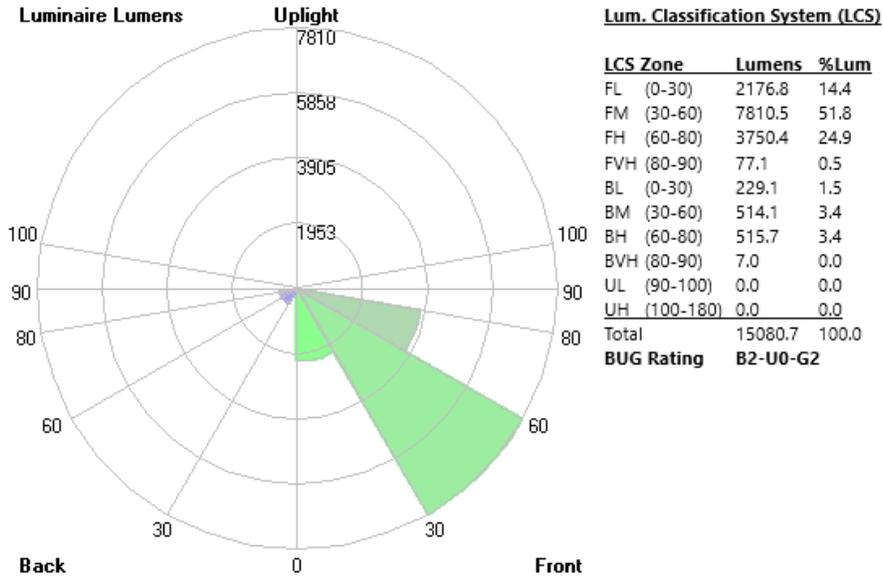

**Initial Lumen Output:** 15081lm

**Luminaire Type:** Type II-H - Medium

**UL Classification:** Wet Location Listed

**CCN Number:** IFAM7.E359675

**Efficacy:** 80lm/W

**BUG Rating:** B2-U0-G2

**Ambient Operating Temp:** -40C to +40C

**Limited Product Warranty:** 10 Year(s)

**Max Candela:** 13029cd (80H, 72V)

**Environmental Rating(s):** IP66

**Certification Standards:** UL Safety US-CA

|                                       |              |
|---------------------------------------|--------------|
| <b>Project:</b>                       |              |
| <b>Location:</b>                      |              |
| <b>Model#:</b> ARPS18530K3RT2H-UN4-BK | <b>Type:</b> |
| <b>Client:</b>                        | <b>Qty:</b>  |
| <b>Prepared by:</b>                   | <b>Date:</b> |


## LED SPECIFICATIONS

### R Tables

|           |    |
|-----------|----|
| <b>R1</b> | 73 |
| <b>R2</b> | 77 |
| <b>R3</b> | 80 |
| <b>R4</b> | 76 |
| <b>R5</b> | 74 |
| <b>R6</b> | 70 |
| <b>R7</b> | 80 |
| <b>R8</b> | 61 |

|            |    |
|------------|----|
| <b>R9</b>  | 0  |
| <b>R10</b> | 46 |
| <b>R11</b> | 76 |
| <b>R12</b> | 50 |
| <b>R13</b> | 73 |
| <b>R14</b> | 89 |
| <b>R15</b> | 67 |
| <b>--</b>  | -- |

### SPD

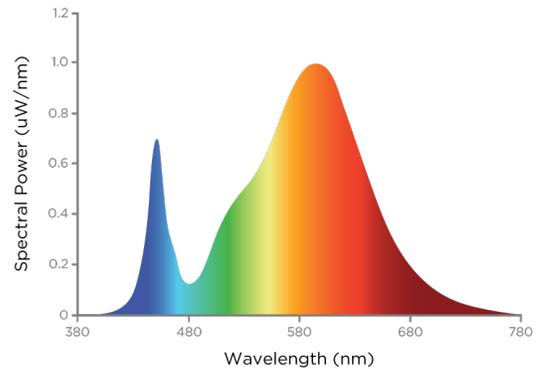

**Source Type:** LED  
**CRI:** >70  
**Chromaticity:** x=0.4338 y=0.4030

**Manufacturer:** Nichia®  
**L70:** 60000 Hrs  
**Colour Tolerance:** 3 SDCM

**Part Number:** NVSW219  
**Colour Temperature:** 3000K  
**Duv:** 0.006

## ELECTRICAL SPECIFICATIONS

**Driver Manufacturer:** Inventronics®  
**Input Frequency:** 50-60Hz  
**Inrush Current:** 1.3 A2S  
**Power Factor @347Vac:** >.90  
**Max Operating Case Temperature:** 90C  
**Dimming Current mA:** .45mA  
**Driver Certifications:** c-RU-us Class 2, FCC Part 15 Class B, RoHS

**Driver Part Number:** ESD-240SxxxDT  
**Fixture Draw:** 194.3W  
**Max On-Delay:** < 1.5 S  
**THD @347Vac(%):** <10%  
**Surge Suppression:** 10kV  
**Over Temperature Protection:** Auto recovery. Current returns to normal after over temperature is removed.

**Input Voltage:** 347Vac  
**Current Draw@347Vac:** 0.5599  
**Auxiliary Control:** 12 VDC  
**Driver MTBF:** 209,000hrs  
**Dimming:** 1-10Vdc, (10% Min Light Level)  
**Short Circuit Protection:** Auto recovery. The output shall return to normal when the fault condition is removed.

## PHYSICAL SPECIFICATIONS

**Finish Colour:** Black (RAL-9011)  
**Mounting:** 3" round pole  
**Lens Type:** clear optics  
**Entries:** gasketed wire entry

**Finish Type:** Textured powder coat over chromate conversion coat  
**Housing Material:** ADC12 aluminium  
**Weight:** 8.1 kg

**Wiring:** internal junction  
**Lens Material:** PMMA  
**EPA:** 0.1932

|                                |       |
|--------------------------------|-------|
| Project:                       |       |
| Location:                      |       |
| Model#: ARPS18530K3RT2H-UN4-BK | Type: |
| Client:                        | Qty:  |
| Prepared by:                   | Date: |

## SHIPPING INFORMATION

OrderingCode(s): ARPS1853KT2H-UN4-BK, AR-PSSQ-BK, AR-PS3R5R-BK


Box Weight: 8.1 kg

Box Quantity: 1

Box Dimensions (L-W-H): 695 x 340 x 180 mm

## LINE DRAWING

### Line Drawings

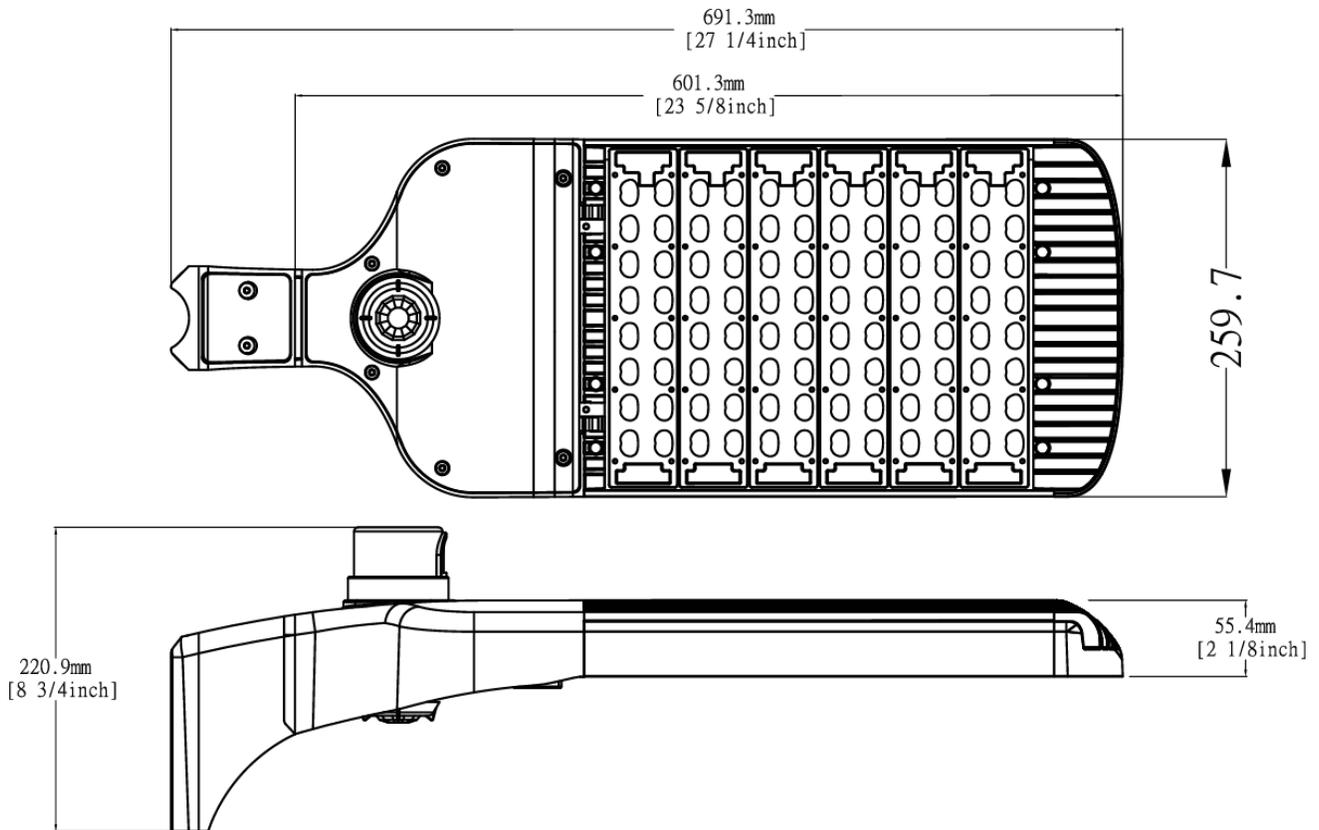



|                                |       |
|--------------------------------|-------|
| Project:                       |       |
| Location:                      |       |
| Model#: ARPS18530K3RT2H-UN4-BK | Type: |
| Client:                        | Qty:  |
| Prepared by:                   | Date: |

SERIES ARCHITECTURE

Series Architecture

ARPS

| Part | Wattage |      | CCT |       | Mounting |               | Optics                 |                        | Voltage |            | Finish |        | Accessories |                                     |
|------|---------|------|-----|-------|----------|---------------|------------------------|------------------------|---------|------------|--------|--------|-------------|-------------------------------------|
| ARPS | 35      | 35W  | 30K | 3000K | SQ       | SQ Pole Mount | T2                     | Type II                | UNV     | 120-277VAC | BZ     | Bronze | [blank]     | None                                |
|      | 75      | 75W  | 40K | 4000K | 3R       | 3" RD Pole    | T2H                    | with House Side Shield | UN4     | 347VAC     | BK     | Black  | O           | Occupancy Sensor                    |
|      | 140     | 140W | 50K | 5000K | 4R       | 4" RD Pole    | T3                     | Type III               | WRV     | 120-347VAC | WH     | White  | AR-N3PC-UNV | 120VAC Photo control                |
|      | 185     | 185W | AM  | Amber | 5R       | 5" RD Pole    | T3H                    | with House Side Shield |         |            |        |        | CC          | Custom                              |
|      |         |      |     |       | SF       | Slip Fitter   | T4                     | Type IV                |         |            |        |        |             | AR-SPIKE                            |
|      |         |      |     |       |          | T4H           | with House Side Shield |                        |         |            |        |        | FSIR-100    | Programming remote, sold separately |
|      |         |      |     |       |          | T5            | Type V                 |                        |         |            |        |        |             |                                     |
|      |         |      |     |       |          | T5H           | with House Side Shield |                        |         |            |        |        |             |                                     |

Optional Extras: AR-SPIKE AR-N3PC-UNV