

Project:	
Location:	
Model#: EVK3-4A-SN	Туре:
Client:	Qty:
Prepared by:	Date:

SERIES SPECIFICATIONS



To supply Tamlite DLELV Series of Tamper Proof Elevator Cab Lights as specified. The kit shall operate at 120Vac. Lamps shall be as specified, LED MRI6 lamps with a GU5.3 base. Lamps are not included in the kit. Driver shall be included, and as specified 12VDC constant voltage, with a maximum output of 48W. The driver shall be cULus Listed



PERFORMANCE SPECIFICATIONS

 Luminaire Type: Direct
 Environmental Rating(s): IP20
 UL Classification: Dry Location Only

 Ambient Operating Temp: 0C to +40C
 Certification Standards: cULus
 Limited Product Warranty: 1 Year

LED SPECIFICATIONS

Source Type: MR16, GU5.3 base CRI: >70

ELECTRICAL SPECIFICATIONS

Dimming: Not Suitable for Dimming

Input Voltage: 120Vac Input Frequency: 50-60Hz Fixture Draw: 48W

PHYSICAL SPECIFICATIONS

Finish Colour: Satin Nickel Finish Type: Anodized Wiring: 106" wiring harness (47" driver to Mounting: Recessed Housing Material: Aluminium first fixture, 30" between fixtures)

SHIPPING INFORMATION

OrderingCode(s): EVK3-4A-SN

Box Weight: 0.7 kgBox Quantity: 1Box Dimensions (L-W-H): 152 x 127 xCarton Weight: 14.8 1Carton Quantity: 20132 mm

Carton Dimensions (I-W-H): 620 x 270 x


320 mm



Project:	
Location:	
Model#: EVK3-4A-SN	Туре:
Client:	Qty:
Prepared by:	Date:

LINE DRAWING

Line Drawings

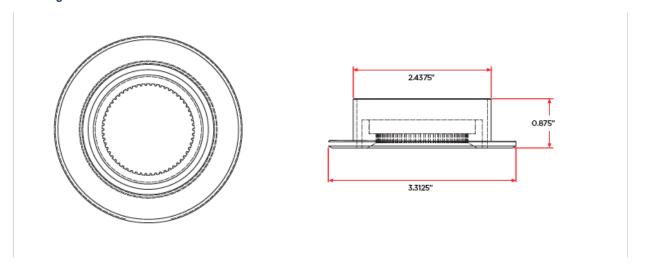

SERIES ARCHITECTURE

Optional Extras: EVK-4A-DRIVER, EVK-ADAPTER, EVK-HARNESS, EVK-RS