

Project:									
Location:									
Model#: TLVP47530K-UN4 Type:									
Client:	Qty:								
Prepared by:	Date:								

SERIES SPECIFICATIONS



To supply Tamlite TLVP Series of LED vapour proof fixtures as specified. The luminaire shall operate at 347Vac. The housing shall be constructed of Bayer® polycarbonate with a clamp down opal Bayer® polycarbonate lens. The fixture shall be IP65 rated and include an IP66 strain relief. A durable formed gasket shall be provided between the enclosure and the lens. All parts shall be corrosion resistant. The LED shall be supplied with the luminaire. The fixture shall be cULus & DLC Listed.





















PERFORMANCE SPECIFICATIONS

Luminance Distribution Chart



Isolux Diagram



Zonal Lumen Summary

Zone	Lumens	Zone	Lumens	Zone	Lumens	Zone	Lumens	Zone	Lumens	Zone	Lumens
0-10	266.01	30-40	1357.11	60-70	1032.41	90-100	95.71	120-130	33.99	150-160	3.81
10-20	757.75	40-50	1400.57	70-80	712.5	100-110	108.72	130-140	16.85	160-170	1.97
20-30	1137.28	50-60	1280.23	80-90	405.95	110-120	64.96	140-150	7.88	170-180	0.78



Project:										
Location:										
Model#: TLVP47530K-UN4	Туре:									
Client:	Qty:									
Prepared by:	Date:									

Co-efficient of Utilization

RC		80			70		50		30			10			0													
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0										
RF		2	0			2	0			20		20		20		20		20		20		20			20			20
0	118	118	118	118	115	115	115	115	109	109	109	104	104	104	99	99	99	96										
1	106	101	96	92	103	98	94	90	93	90	87	89	86	83	85	82	80	78										
2	96	88	80	74	93	85	79	73	81	75	71	77	73	68	74	70	66	64										
3	88	77	68	61	85	75	67	60	71	64	59	68	62	57	65	60	56	53										
4	80	68	59	52	78	66	58	51	63	56	50	60	54	49	58	52	48	45										
5	74	60	51	44	71	59	50	44	56	49	43	54	47	42	52	46	41	39										
6	68	54	45	39	66	53	45	38	51	43	38	49	42	37	47	41	36	34										
7	63	49	40	34	61	48	40	34	46	39	33	45	38	33	43	37	32	30										
8	59	45	36	30	57	44	36	30	42	35	30	41	34	29	39	33	29	27										
9	55	41	33	27	53	40	33	27	39	32	27	38	31	26	36	30	26	24										
10	51	38	30	25	50	37	30	25	36	29	24	35	29	24	34	28	24	22										

Initial Lumen Output: 8684lm

CBCP: 2821cd

Luminaire Type: Semi-Direct

UL Classification: Wet Location Listed

DLC Number: P4XCFE2N

Efficacy: 120.50lm/W
Beam Angle: 120 deg

Spacing Criteria: 1.26(0-180), 1.30(90-

270)

Ambient Operating Temp: -40C to +40C

CCN Number: IFAO7.E470484

Max Candela: 2821cd (0H, 0V)

Field Angle: 170 deg

Environmental Rating(s): IP65

Certification Standards: UL Safety US-

CA, DLC

Limited Product Warranty: 5 Year(s)



Project:								
Location:								
Model#: TLVP47530K-UN4	Туре:							
Client:	Qty:							
Prepared by:	Date:							


LED SPECIFICATIONS

R Tables


SPD

R1	83					
R2	93					
R3	95					
R4	81					
R 5	83					
R6	92					
R7	82					
R8	59					

R9	10
R10	84
R11	82
R12	75
R13	85
R14	98
R15	75
Ra	83



TM-30



Source Type: LED

Rf: 85

Colour Temperature: 3000K

Part Number: T28351-W29SC0D2FB3C0

Rg: 96

Chromaticity: x=0.4314 y=0.4061

CRI: >80

L70: 72000 Hrs **Duv:** 0.0016



Project:									
Location:									
Model#: TLVP47530K-UN4	Туре:								
Client:	Qty:								
Prepared by:	Date:								

ELECTRICAL SPECIFICATIONS

Driver Manufacturer: ARC Smart

Electronic Co., Ltd.

Fixture Draw: 75.55W

Max On-Delay: < 1 S

Dimming: 0-10Vdc, (0% Min Light Level) **Driver Certifications:** c-RU-us Class 2,

FCC Part 15 Class B, RoHS

Input Voltage: 347Vac

Current Draw@347Vac: 0.2213

Power Factor @347Vac: >.90

Over Temperature Protection: Auto
Recovery, The fixture shall shut down and

return to operation when the temperature

returns to normal.

Input Frequency: 50-60Hz

Inrush Current:

THD @347Vac(%): <10%

Short Circuit Protection: Auto Recovery. The output shall return to normal when the

fault condition is removed.

PHYSICAL SPECIFICATIONS

Finish Colour: Grey

Mounting: Surface, Suspended

Lens Type: Opal

Finish Type: Dye injected polycarbonate **Housing Material:** Bayer PC with Grey

pigment powder

Reflector Material: Aluminium with UV

Painting

Wiring: 3 Conductor 18AWG Lens Material: Bayer PC

Entries: Supplied with wet location fitting. Other knockout points also on housing.

SHIPPING INFORMATION

OrderingCode(s): TLVP47530K-UN4

Box Weight: 3.6 kg Carton Weight: 21.6 Box Quantity: 1
Carton Quantity: 6

Box Dimensions (L-W-H): 1300 x 175 x


102 mm

Carton Dimensions (I-W-H): 1320 x 325 x

375 mm

LINE DRAWING

Line Drawings

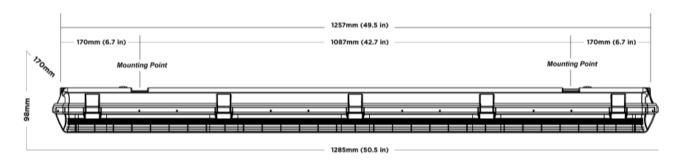



Project:										
Location:										
Model#: TLVP47530K-UN4	Туре:									
Client:	Qty:									
Prepared by:	Date:									

SERIES ARCHITECTURE

Series Architecture

TLVP -					·						
Part	Siz	e	Wa	ttage	ССТ	CCT Voltage		Options			
TLVP	4	4ft	40	40W	30K	3000K	WRV	120-347VAC	EM	Emergency Battery Backup	
			75	75W	35K	3500K					
					40K	4000K*					
					50K	5000K*					

^{*} Typically Stock