



Project:	
Location:	
Model#: CMS2BZ	Type:
Client:	Qty:
Prepared by:	Date:

## SERIES SPECIFICATIONS




LED security floodlights are ideal for entrances, walkways, yards, driveways, and patios. Fixture mounts to a recessed junction box on wall or ceiling. Adjustable heads allow for precision aiming.



## PERFORMANCE SPECIFICATIONS

**Luminance Distribution Chart**

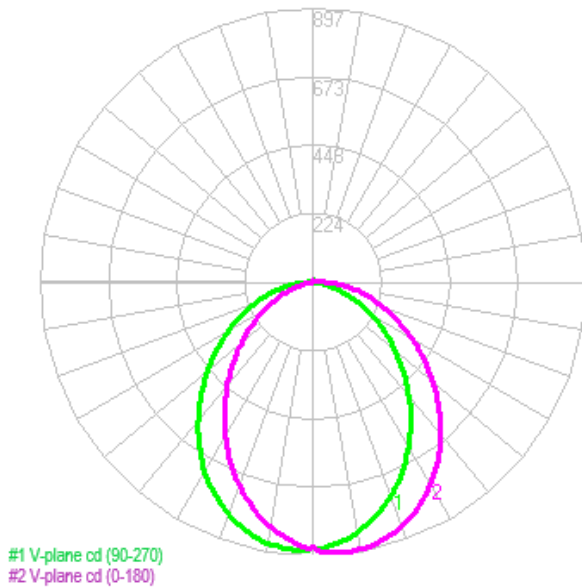


**Initial Lumen Output:** 2120lm

**Certification Standards:** cETLus, UL-773A

**Efficacy:** 68.8lm/W

**Limited Product Warranty:** 3 Year(s)

**Isolux Diagram**

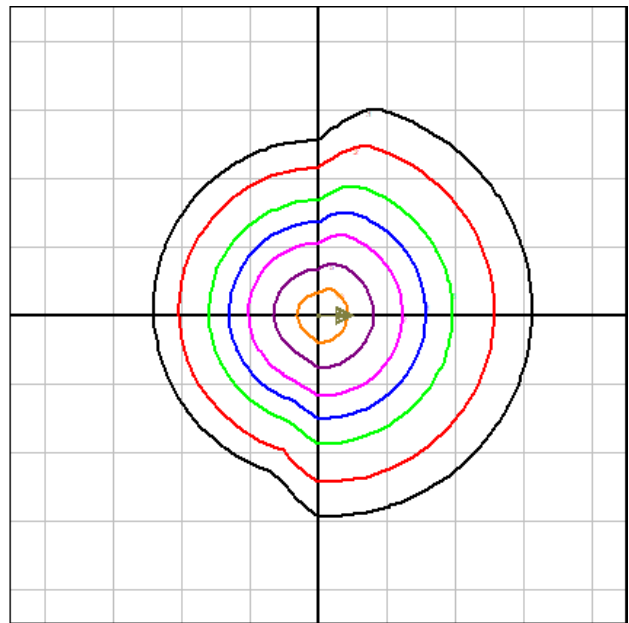


**Max Candela:** 896cd

Project:	
Location:	
Model#: CMS2BZ	Type:
Client:	Qty:
Prepared by:	Date:

## LED SPECIFICATIONS

### SPD

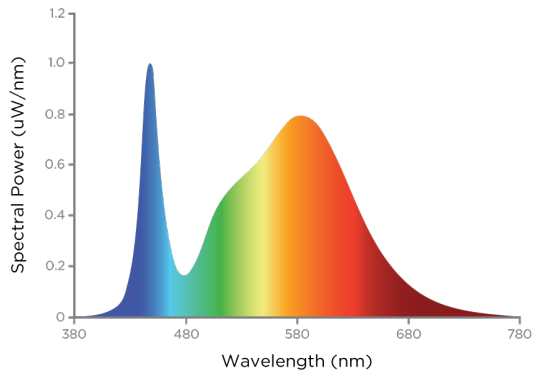

**Source Type:** LED  
**Colour Temperature:** 4000K

**CRI:** >70

**L70:** 40000 Hrs

## ELECTRICAL SPECIFICATIONS

**Input Voltage:** 120Vac  
**Current Draw@ 120Vac:** 0.2667

**Input Frequency:** 50-60Hz  
**Dimming:** 0-10Vdc, (0% Min Light Level)

**Fixture Draw:** 32W

## PHYSICAL SPECIFICATIONS

**Finish Colour:** Bronze (RAL-8019)  
**Lens Material:** Polycarbonate

**Mounting:** 4" Junction Box  
**Lens Type:** Frosted

**Housing Material:** Polycarbonate

## SHIPPING INFORMATION

**OrderingCode(s):** CMS2BZ

**Carton Quantity:** 12

**Box Quantity:** 1  
**Carton Dimensions (L-W-H):** 541 x 400 x 338mm

**Box Dimensions (L-W-H):** 192 x 175 x 160mm

## SERIES ARCHITECTURE

**Optional Extras:** CMS180BZ