

Project:	
Location:	
Model#: CMS2180BZ	Type:
Client:	Qty:
Prepared by:	Date:

## SERIES SPECIFICATIONS




LED security floodlights are ideal for entrances, walkways, yards, driveways, and patios. Fixture mounts to a recessed junction box on wall or ceiling. Adjustable heads allow for precision aiming.




## PERFORMANCE SPECIFICATIONS

Luminance Distribution Chart

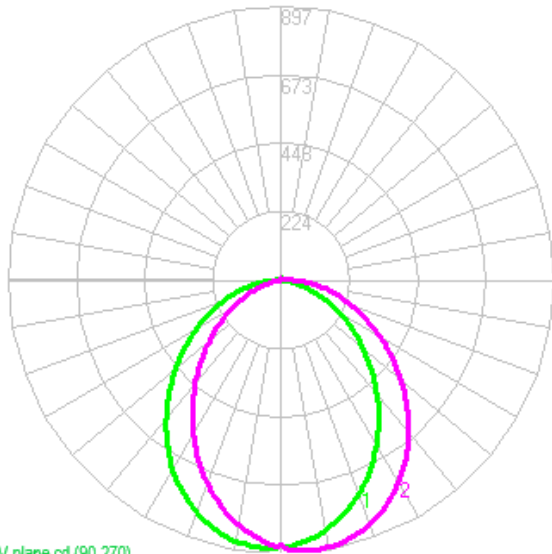

#1 V-plane cd (90-270)  
#2 V-plane cd (0-180)

Isolux Diagram

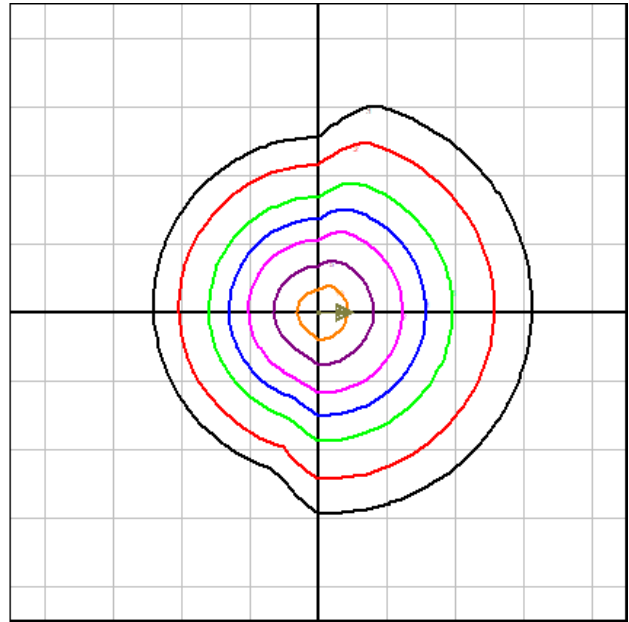

**Initial Lumen Output:** 2120lm

**Certification Standards:** cETLus, UL-773A

**Efficacy:** 68.8lm/W


**Limited Product Warranty:** 3 Year(s)

**Max Candela:** 896cd

<b>Project:</b>	
<b>Location:</b>	
<b>Model#:</b> CMS2180BZ	<b>Type:</b>
<b>Client:</b>	<b>Qty:</b>
<b>Prepared by:</b>	<b>Date:</b>

**LED SPECIFICATIONS**

**SPD**

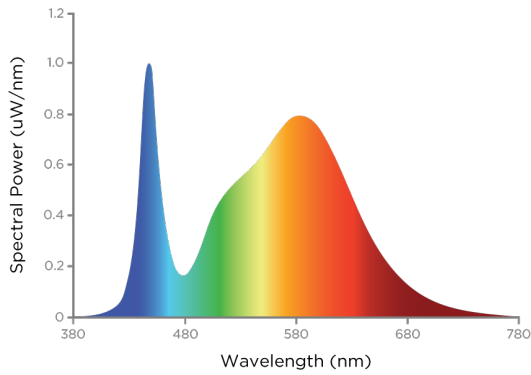

**Source Type:** LED  
**Colour Temperature:** 4000K

**CRI:** >70

**L70:** 40000 Hrs

**ELECTRICAL SPECIFICATIONS**

**Input Voltage:** 120Vac  
**Current Draw@ 120Vac:** 0.2667

**Input Frequency:** 50-60Hz  
**Dimming:** 0-10Vdc, (0% Min Light Level)

**Fixture Draw:** 32W

**OCCUPANCY SENSOR INFORMATION**

**Sensor Type:** Passive Infrared (PIR) -  
 Outdoor  
**Programing Type:** Dials on Body

**Control Type:** On-Off

**Input Voltage:** 120Vac

**PHOTOCELL SENSOR INFORMATION**

**Control Type:** On-Off

**Input Voltage:** 120Vac

**Programing Type:** Dials on Body, Manual over-ride at night

**PHYSICAL SPECIFICATIONS**

**Finish Colour:** Bronze (RAL-8019)  
**Lens Material:** Polycarbonate

**Mounting:** 4" Junction Box  
**Lens Type:** Frosted

**Housing Material:** Polycarbonate

Project:	
Location:	
Model#: CMS2180BZ	Type:
Client:	Qty:
Prepared by:	Date:

## SHIPPING INFORMATION

OrderingCode(s): CMS2180BZ

Carton Quantity: 12

Box Quantity: 1

Carton Dimensions (L-W-H): 541 x 400 x 338mm

Box Dimensions (L-W-H): 192 x 175 x 160mm

## LINE DRAWING

### Line Drawings

