



| | |
|-----------------------|-------|
| Project: | |
| Location: | |
| Model#: TRRMSCS2180BZ | Type: |
| Client: | Qty: |
| Prepared by: | Date: |

SERIES SPECIFICATIONS




LED security floodlights are ideal for entrances, walkways, yards, driveways, and patios. Fixture mounts to a recessed junction box on wall or ceiling. Adjustable heads allow for precision aiming. White CCT can be adjusted on the sensor head.



PERFORMANCE SPECIFICATIONS

Luminance Distribution Chart

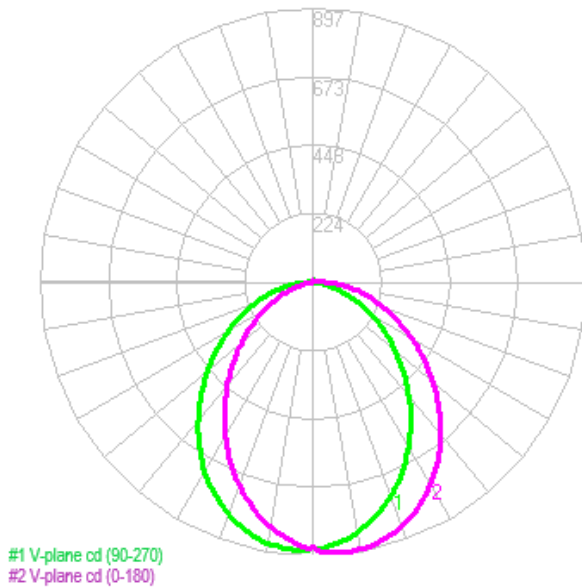


Initial Lumen Output: 2400lm

Certification Standards: cETLus, UL-773A

Efficacy: 75lm/W

Limited Product Warranty: 3 Year(s)

Isolux Diagram

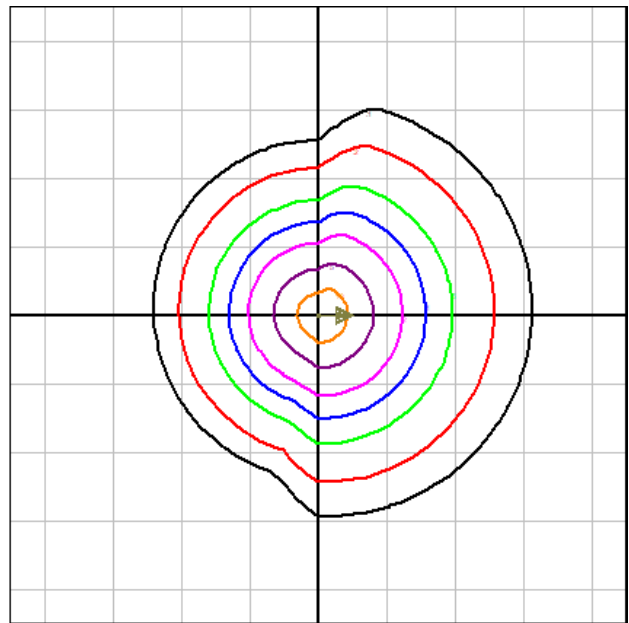

Max Candela: 975cd



| | |
|-----------------------|-------|
| Project: | |
| Location: | |
| Model#: TRRMSCS2180BZ | Type: |
| Client: | Qty: |
| Prepared by: | Date: |

LED SPECIFICATIONS

Source Type: LED **CRI:** >70 **L70:** 40000 Hrs
Colour Temperature: 3000K~5000K

ELECTRICAL SPECIFICATIONS

Input Voltage: 120Vac **Input Frequency:** 50-60Hz **Fixture Draw:** 32W
Current Draw@ 120Vac: 0.2667 **Dimming:** 0-10Vdc, (0% Min Light Level)

OCCUPANCY SENSOR INFORMATION

Sensor Type: Passive Infrared (PIR) - Outdoor **Control Type:** On-Off **Input Voltage:** 120Vac
Programing Type: Dials on Body

PHOTOCELL SENSOR INFORMATION

Control Type: On-Off **Input Voltage:** 120Vac **Programing Type:** Dials on Body, Manual over-ride at night

PHYSICAL SPECIFICATIONS

Finish Colour: Bronze (RAL-8019) **Mounting:** 4" Junction Box **Housing Material:** Polycarbonate
Lens Material: Polycarbonate **Lens Type:** Frosted

SHIPPING INFORMATION

OrderingCode(s): TRRMSCS2180BZ
Box Quantity: 1