

Project:		
Location:		
Model#:	TRRMSCS2180BZ	Type:
Client:		Qty:
Prepared by:		Date:

## SERIES SPECIFICATIONS




LED security floodlights are ideal for entrances, walkways, yards, driveways, and patios. Fixture mounts to a recessed junction box on wall or ceiling. Adjustable heads allow for precision aiming. White CCT can be adjusted on the sensor head.




## PERFORMANCE SPECIFICATIONS

Luminance Distribution Chart

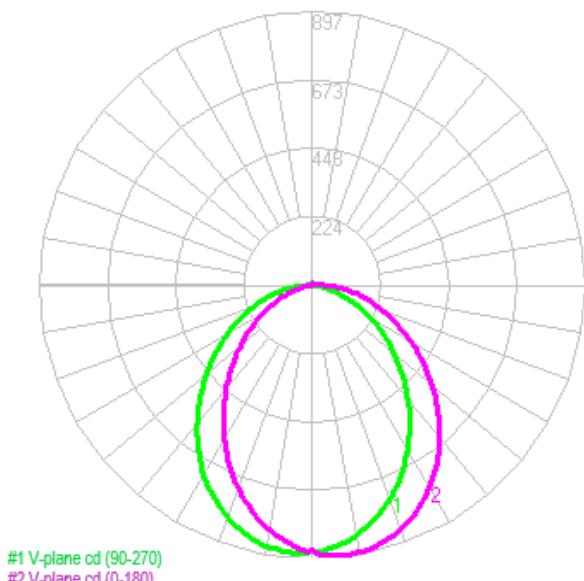

Isolux Diagram

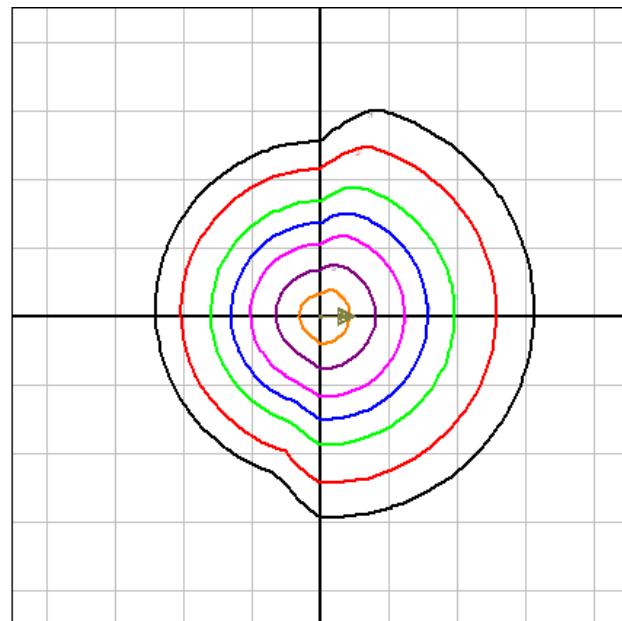

**Initial Lumen Output:** 2400lm

**Certification Standards:** cETLus, UL-773A

**Efficacy:** 75lm/W

**Limited Product Warranty:** 3 Year(s)

**Max Candela:** 975cd

## LED SPECIFICATIONS

**Source Type:** LED

**CRI:** >70

**L70:** 40000 Hrs

**Colour Temperature:** 3000K~5000K

## ELECTRICAL SPECIFICATIONS

**Input Voltage:** 120Vac

**Current Draw@ 120Vac:** 0.2667

**Input Frequency:** 50-60Hz

**Dimming:** 0-10Vdc, (0% Min Light Level)

**Fixture Draw:** 32W

## OCCUPANCY SENSOR INFORMATION

**Sensor Type:** Passive Infrared (PIR) -

Outdoor

**Programing Type:** Dials on Body

**Control Type:** On-Off

**Input Voltage:** 120Vac

## PHOTOCELL SENSOR INFORMATION

**Control Type:** On-Off

**Input Voltage:** 120Vac

**Programing Type:** Dials on Body, Manual over-ride at night

## PHYSICAL SPECIFICATIONS

**Finish Colour:** Bronze (RAL-8019)

**Lens Material:** Polycarbonate

**Mounting:** 4" Junction Box

**Lens Type:** Frosted

**Housing Material:** Polycarbonate

## SHIPPING INFORMATION

**OrderingCode(s):** TRRMSCS2180BZ

**Box Quantity:** 1