



Project:	
Location:	
Model#: TRRMSCS2180BZ	Type:
Client:	Qty:
Prepared by:	Date:

SERIES SPECIFICATIONS




LED security floodlights are ideal for entrances, walkways, yards, driveways, and patios. Fixture mounts to a recessed junction box on wall or ceiling. Adjustable heads allow for precision aiming. White CCT can be adjusted on the sensor head.




PERFORMANCE SPECIFICATIONS

Luminance Distribution Chart

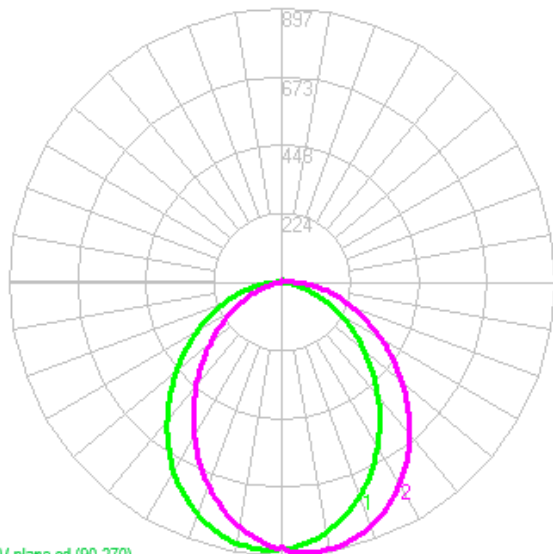

#1 V-plane cd (90-270)
#2 V-plane cd (0-180)

Isolux Diagram

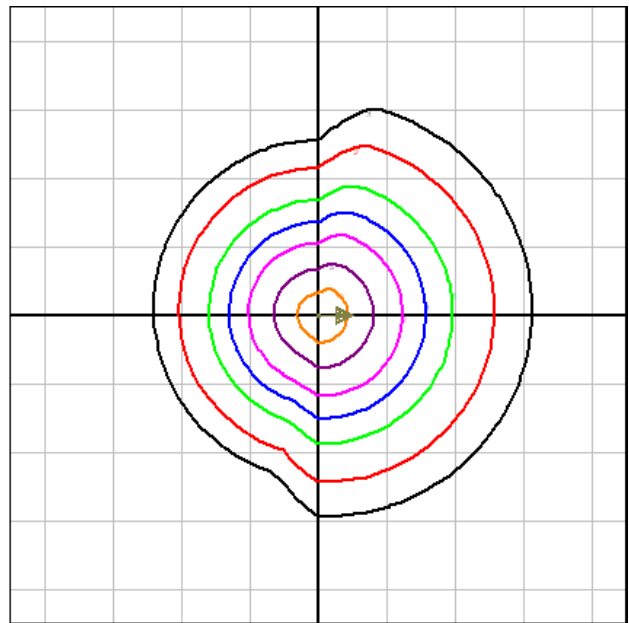

Initial Lumen Output: 2400lm
Certification Standards: cETLus, UL-773A

Efficacy: 75lm/W
Limited Product Warranty: 3 Year(s)

Max Candela: 975cd

LED SPECIFICATIONS

Source Type: LED
Colour Temperature: 3000K-5000K

CRI: >70

L70: 40000 Hrs



Project:	
Location:	
Model#: TRRMSCS2180BZ	Type:
Client:	Qty:
Prepared by:	Date:

ELECTRICAL SPECIFICATIONS

Input Voltage: 120Vac
Current Draw@ 120Vac: 0.2667

Input Frequency: 50-60Hz
Dimming: 0-10Vdc, (0% Min Light Level)

Fixture Draw: 32W

OCCUPANCY SENSOR INFORMATION

Sensor Type: Passive Infrared (PIR) -
Outdoor
Programing Type: Dials on Body

Control Type: On-Off

Input Voltage: 120Vac

PHOTOCELL SENSOR INFORMATION

Control Type: On-Off

Input Voltage: 120Vac

Programing Type: Dials on Body, Manual
over-ride at night

PHYSICAL SPECIFICATIONS

Finish Colour: Bronze (RAL-8019)
Lens Material: Polycarbonate

Mounting: 4" Junction Box
Lens Type: Frosted

Housing Material: Polycarbonate

SHIPPING INFORMATION

OrderingCode(s): TRRMSCS2180BZ

Box Quantity: 1