



Project:	
Location:	
Model#: UCB0903SW-120	Type:
Client:	Qty:
Prepared by:	Date:


## SERIES SPECIFICATIONS

To supply Tamlite UCB series of LED under cabinet fixtures as specified. Each fixture comes complete with mounting clips and screws, as well as one butt connector. Fixture shall operate at 120Vac and be dimmable by Triac Dimmer. Fixture shall be CCT Selectable and be cETLus Listed.



## PERFORMANCE SPECIFICATIONS

### Isolux Diagram

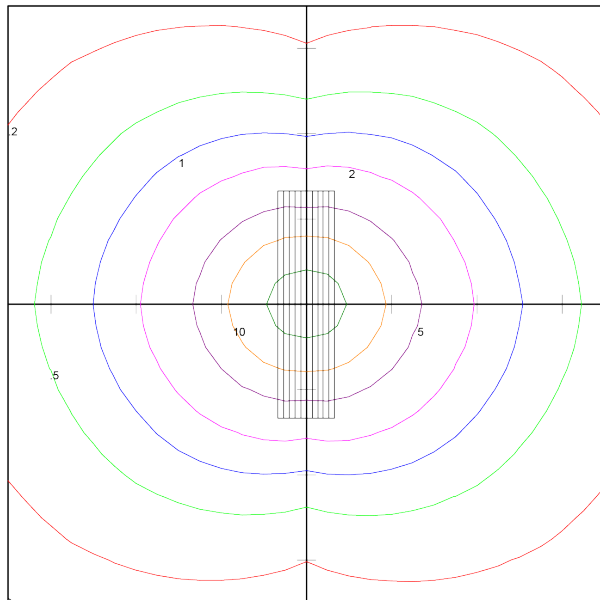

Tamlite Lighting Canada  
10 Perdue Crt. Caledon, ON  
UCB0903SW-120V  
9.5 Inch 3Watt Under Cabinet Light 120VAC  
Selectable white 3000K, 4000K, 5000K

Horizontal Footcandles  
Scale: 1 Inch = 1.5 Ft  
Light Loss Factor = 1.00  
Lumens Per Lamp = N.A. (absolute photometry)  
Luminaire Lumens = 301  
Mounting Height = 1.50 Ft  
Maximum Calculated Value = 27.56 Fc  
Arrangement: Single



Project:	
Location:	
Model#: UCB0903SW-120	Type:
Client:	Qty:
Prepared by:	Date:

### Zonal Lumen Summary

ZONE	LUMENS	ZONE	LUMENS	ZONE	LUMENS	ZONE	LUMENS	ZONE	LUMENS
0-10	5.90	40-50	37.50	80-90	24.35	120-130	5.47	160-170	0.42
10-20	17.20	50-60	37.84	90-100	19.21	130-140	3.40	170-180	0.11
20-30	26.84	60-70	35.21	100-110	12.66	140-150	1.94	--	--
30-40	33.81	70-80	30.36	110-120	7.83	150-160	1.01	--	--

### Co-efficient of Utilization

CC	80				70				50			30			10			0
WALL	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
fc	20				20				20			20			20			0
RCR																		
0	115	115	115	115	110	110	110	110	102	102	102	94	94	94	86	86	86	83
1	101	95	90	85	97	91	86	82	84	80	76	77	74	71	70	68	65	62
2	91	81	73	66	87	78	70	64	71	65	60	65	60	56	60	56	52	49
3	82	70	61	54	78	67	59	52	62	55	49	57	51	46	52	47	43	40
4	75	62	52	45	71	59	50	43	54	47	41	50	44	39	46	41	36	33
5	68	55	45	38	65	52	44	37	48	41	35	44	38	33	41	35	31	28
6	63	49	39	33	60	47	38	32	43	36	30	40	33	29	37	31	27	24
7	58	44	35	28	55	42	34	28	39	32	26	36	30	25	34	28	24	21
8	54	40	31	25	51	39	30	25	36	29	23	33	27	22	31	25	21	19
9	50	37	28	22	48	35	27	22	33	26	21	31	24	20	28	23	19	17
10	47	34	25	20	45	32	25	20	30	23	19	28	22	18	26	21	17	15

**Initial Lumen Output:** 301lm

**Luminaire Type:** Direct

**UL Classification:** Damp Location Listed

**CCN Number:** IFAM7.E359675

**Efficacy:** 112lm/W

**Spacing Criteria:** 1.2(0-180), 1.28(90-270)

**Ambient Operating Temp:** -10C to +40C

**Limited Product Warranty:** 3 Year(s)

**CBCP:** 62.56cd


**Environmental Rating(s):** IP44

**Certification Standards:** cETLus

Project:	
Location:	
Model#: UCB0903SW-120	Type:
Client:	Qty:
Prepared by:	Date:

## LED SPECIFICATIONS

### SPD

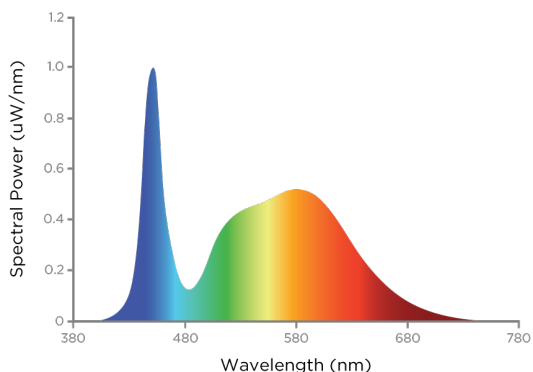

**Source Type:** LED

**CRI:** <90

**L90:** 25,000 Hrs.

**Colour Temperature:** 3000K, 4000K,  
5000K Field Selectable

## ELECTRICAL SPECIFICATIONS

**Input Voltage:** 120Vac

**Current Draw at 120Vac:** 0.0250A

**THD at 120Vac(%):** < 15%

**Short Circuit Protection:** Auto Recovery.  
The output shall return to normal when the  
fault condition is removed.

**Input Frequency:** 50/60 hz

**Max On-Delay:** < 1 S

**Dimming:** Triac

**Driver Certifications:** c-RU-us Class 2,  
FCC Part 15 Class B, RoHS

**Fixture Draw:** 3W

**Power Factor at 120Vac:** 0.9575

**Over Temperature Protection:** Auto  
recovery. Current returns to normal after  
over temperature is removed.

## PHYSICAL SPECIFICATIONS

**Finish Colour:** White

**Mounting:** Surface, 245mm, 9.65" M.O.L.

**Lens Type:** Frosted

**Finish Type:** Painted Steel

**Housing Material:** Steel

**Entries:** Polarity Protected Receptacles

**Wiring:** 18-3 AWG fixture cord, Max 300W  
per branch circuit

**Lens Material:** Plastic



Project:	
Location:	
Model#: UCB0903SW-120	Type:
Client:	Qty:
Prepared by:	Date:

#### SHIPPING INFORMATION


OrderingCode(s): UCB0903SW-120

Box Weight: 0.49 kg

Box Quantity: 1

Box Dimensions (L-W-H): 960 x 35 x 45  
mm

#### LINE DRAWING

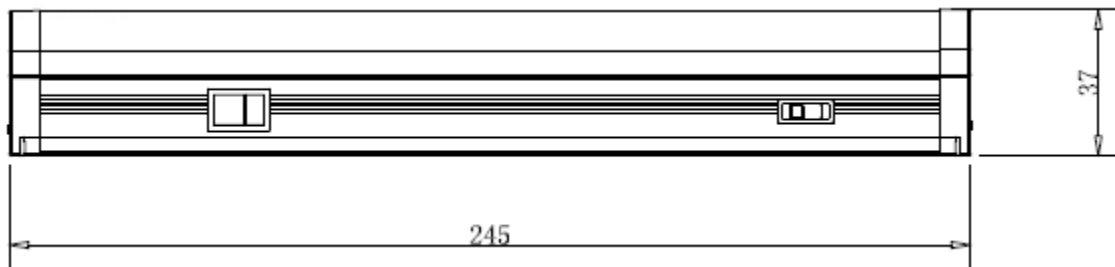



Project:	
Location:	
Model#: UCB0903SW-120	Type:
Client:	Qty:
Prepared by:	Date:

## SERIES ARCHITECTURE

### Series Architecture

UCB - - - - -												
Part	Length	Wattage	CCT	Mounting	Voltage	Finish	Accessories					
UCB	09 9.65 Inch	03 3W	SW Selectable White (3000K,4000K,5000K)	Blank Surface	120 120vac	Blank White	UCB-BC Butt Connector					
14	14.41 Inch	05 5W					UCB-HWJB Hard Wired Junction Box					
24	23.54 Inch	09 9W					UCB-IC36 Inter-connect 36"					
35	35.28 Inch	14 14W					UCB-IC12 Inter-connect 12"					
46	46.62 Inch	18 18W					UCB-IC6 Inter-connect 6"					
58	58.62 Inch	22 22W					UCB-PC Power Cable					

UCB Wattage Table																				
	Fixture Qty																			
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
UCB0903SW-120	3	6	9	12	15	18	21	24	27	30	33	36	39	42	45	48	51	54	57	60
UCB1405SW-120	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
UCB2409SW-120	9	18	27	36	45	54	63	72	81	90	99	108	117	126	135	144	153	162	171	180
UCB3514SW-120	14	28	42	56	70	84	98	112	126	140	154	168	182	196	210	224	238	252	266	280
UCB4618SW-120	18	36	54	72	90	108	126	144	162	180	198	216	234	252	270	288				
UCB5822SW-120	22	44	66	88	110	132	154	176	198	220	242	264	286							
Total Wattage																				

MAX WATTAGE = 300W PER BRANCH CIRCUIT

Example 1;	3 x UCB0903SW-120 + 4 x UCB5822SW-120 = 97W Total Therefore one (1) branch circuit needed
Example 2;	7 x UCB5822SW-120 + 7 x UCB5822SW-120 = 308W Total Therefore two (2) branch circuits needed

Optional Extras: UCB-BC, UCB-HWJB, UCB-IC36, UCB-IC12,UCB-IC6, UCB-PC