

Project:				
Location:				
Model#: PET440SWDI-WRV-WH	Туре:			
Client:	Qty:			
Prepared by:	Date:			

#### **SERIES SPECIFICATIONS**



To supply Tamlite's PET Series 4ft Direct - Indirect luminaire. The Aluminium body and machined endcaps shall be White Electrostatic Polyester Powder Coat painted parts that are treated with a five stage phosphate bonding process. The driver shall operate from 120-347Vac and be a dimmable Class II/P driver, integrating 0-10Vdc, (0% Min Light Level). Lensing shall be Polycarbonate and easily removable for maintenance and assembly. Fixture shall be IP20, Dry Location Only listed. Fixture shall be UL Safety US-CA listed.















#### PERFORMANCE SPECIFICATIONS

#### **Luminance Distribution Chart**



#### Vertical Plane Through Horizontal Angle

#### **Isolux Diagram**



#### **Zonal Lumen Summary**

Zone	Lumens	Zone	Lumens	Zone	Lumens	Zone	Lumens	Zone	Lumens	Zone	Lumens
0-10	127.26	30-40	616.4	60-70	400.8	90-100	18.62	120-130	202.79	150-160	187.24
10-20	359.18	40-50	617.39	70-80	218.91	100-110	68.23	130-140	246.78	160-170	100.77
20-30	529.48	50-60	540.94	80-90	52.87	110-120	134.25	140-150	243.98	170-180	20.51



Project:					
Location:					
Model#: PET440SWDI-WRV-WH	Туре:				
Client:	Qty:				
Prepared by:	Date:				

#### **Co-efficient of Utilization**

RC		8	0		70			50			30			10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RF		2	0		20			20 20				20			20			
0	113	113	113	113	107	107	107	107	97	97	97	87	87	87	78	78	78	74
1	103	99	95	91	98	94	90	87	85	82	80	77	75	73	69	68	66	62
2	94	86	80	75	89	82	77	72	75	70	66	67	64	61	61	58	56	52
3	86	76	68	62	81	72	66	60	66	60	56	60	55	51	54	50	47	44
4	79	67	59	53	74	64	57	51	59	52	48	53	48	44	48	44	41	38
5	72	60	52	45	68	58	50	44	53	46	41	48	43	38	44	39	36	33
6	67	54	46	40	63	52	44	38	47	41	36	43	38	34	40	35	31	29
7	62	49	41	35	59	47	39	34	43	37	32	39	34	30	36	32	28	26
8	57	45	37	31	54	43	35	30	39	33	28	36	31	27	33	29	25	23
9	54	41	33	28	51	39	32	27	36	30	26	33	28	24	31	26	23	21
10	50	38	30	25	48	36	29	25	33	27	23	31	26	22	28	24	21	19

Initial Lumen Output: 3463lm / 1223lm D/l

**CBCP:** 1355cd

Luminaire Type: Suspended Direct -

Indirect

**UL Classification:** Dry Location Only **Limited Product Warranty:** 5 Year(s)

Efficacy: 111lm/W
Beam Angle: 100 deg

Spacing Criteria: 1.22 (0-180) 1.2 (90-270) Certification Standards: UL Safety US-

CA

Max Candela: 1355cd Field Angle: 156 deg

Environmental Rating(s): IP20 CCN Number: IFAM7.E359675




Project:					
Location:					
Model#: PET440SWDI-WRV-WH	Туре:				
Client:	Qty:				
Prepared by:	Date:				

#### **LED SPECIFICATIONS**

**R Tables** 

R1	83
R2	93
R3	95
R4	81
R5	83
R6	92
R7	82
R8	59

R9	8
R10	83
R11	81
R12	74
R13	85
R14	98
R15	74
Ra	85



**Source Type:** LED **L90:** > 50,000 hrs.

Rf: 85 Colour Temperature: 3000K, 3500K, 4000K, 5000K Field Selectable **Rg:** 95

# ELECTRICAL SPECIFICATIONS

**Driver Manufacturer: ARC Smart** 

Electronic Co. Ltd. **Fixture Draw:** 42.14W

Current Draw at 347Vac: 0.1214A Power Factor at 277Vac: > 0.90 THD at 347Vac(%): < 10%

**Short Circuit Protection:** Auto recovery. The output recovers when short is removed.

Input Voltage: 120-347Vac Current Draw at 120Vac: 0.3512

Max On-Delay: < 1 S

Power Factor at 347Vac: > 0.90 Dimming: 0-10Vdc, (0% Min Light Level) Input Frequency: 50/60 hz
Current Draw at 277Vac: 0.1521A
Power Factor at 120Vac: > 0.90
THD at 120Vac(%): < 5%

**Over Temperature Protection:** Auto recovery. The output recovers when the temperature returns to normal.



Project:					
Location:					
Model#: PET440SWDI-WRV-WH	Туре:				
Client:	Qty:				
Prepared by:	Date:				

#### PHYSICAL SPECIFICATIONS

Finish Colour: White

Mounting: Surface mounting hardware

included

Lens Type: Opal

Finish Type: Electrostatic Polyester

**Powder Coat** 

Housing Material: Aluminium

Entries: 2 1/2inch knock-outs on fixture

back

Wiring: Internal, L, N, G and 0-10Vdc wires

Lens Material: Polycarbonate

## SHIPPING INFORMATION

OrderingCode(s): PET440SWDI-WRV-WH


Box Quantity: 1

Box Dimensions (L-W-H):

1200x72x92mm (48x2-13/26x3-5/8in)

## LINE DRAWING

#### **Line Drawings**

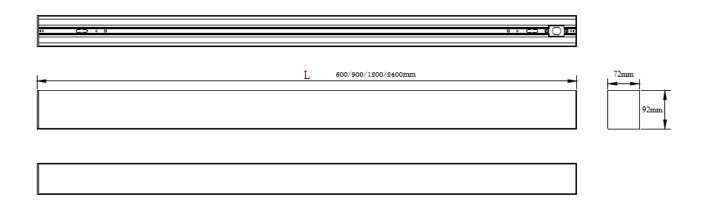

## SERIES ARCHITECTURE

Optional Extras: PET-C10, PET-JL-SWD-WH, PET-JT-SWD-WH, PET-JX-SWD-WH, PET-J120-SWD-WH, PET-MUDKIT4, PET-RECKIT4, PET-SUSKIT6, PET-TBARKIT, PET-WMKIT