



Project:	
Location:	
Model#: PET-J120-SWD-WH	Type:
Client:	Qty:
Prepared by:	Date:

SERIES SPECIFICATIONS

To supply Tamlite's PET-J120 for the PET Series of linear luminaires.



PERFORMANCE SPECIFICATIONS

Beam Angle: 100 deg

Spacing Criteria: 1.22 (0-180) 1.2 (90-270)

Certification Standards: UL Safety US-CA

Field Angle: 156 deg

Environmental Rating(s): IP20

CCN Number: IFAM7.E359675


Luminaire Type: Suspended Direct

UL Classification: Dry Location Only

Limited Product Warranty: 5 Year(s)

LED SPECIFICATIONS

SPD

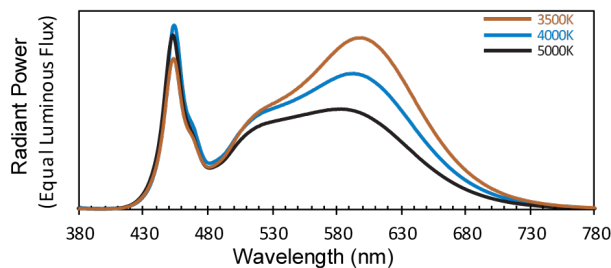

Source Type: LED

L90: > 50,000 hrs.

Colour Temperature: 3000K, 3500K, 4000K, 5000K Field Selectable

ELECTRICAL SPECIFICATIONS

Dimming: 0-10Vdc, (0% Min Light Level)

Over Temperature Protection: Auto recovery. The output recovers when the temperature returns to normal.

Short Circuit Protection: Auto recovery. The output recovers when short is removed.



Project:	
Location:	
Model#: PET-J120-SWD-WH	Type:
Client:	Qty:
Prepared by:	Date:

PHYSICAL SPECIFICATIONS

Finish Colour: White
Lens Material: Polycarbonate

Finish Type: Electrostatic Polyester
Powder Coat
Lens Type: Opal

Housing Material: Aluminium

SHIPPING INFORMATION

OrderingCode(s): PET-J120-SWD-WH

Box Quantity: 1