



Project:	
Location:	
Model#: PL330K-24V-WH	Type:
Client:	Qty:
Prepared by:	Date:


SERIES SPECIFICATIONS

Add a punch of light with the PL3 Puck Light. Trophies, glassware, collectables.



PERFORMANCE SPECIFICATIONS

Luminance Distribution Chart

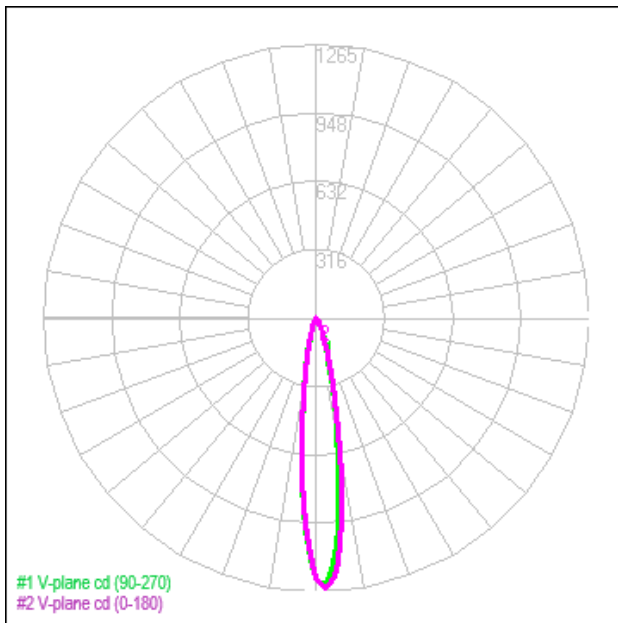


Initial Lumen Output: 178lm

Beam Angle: 16 deg

Efficacy: 59.19lm/W


Field Angle: 35 deg

Isolux Diagram

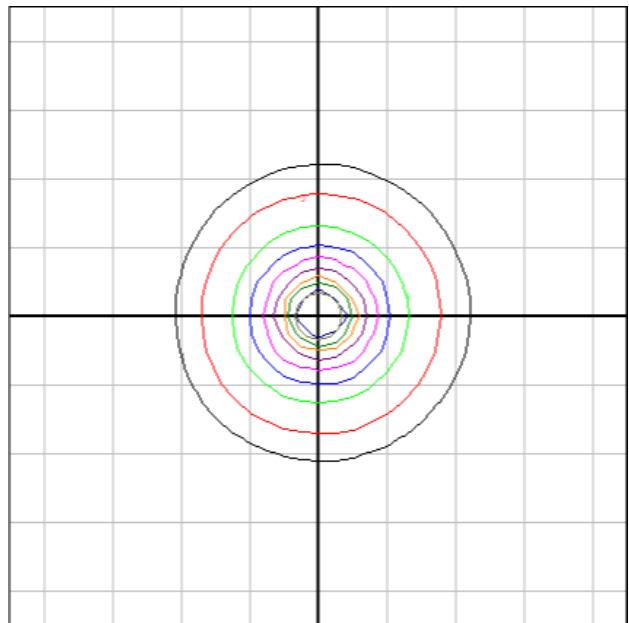

CBCP: 1264cd

Limited Product Warranty: 5 Year(s)

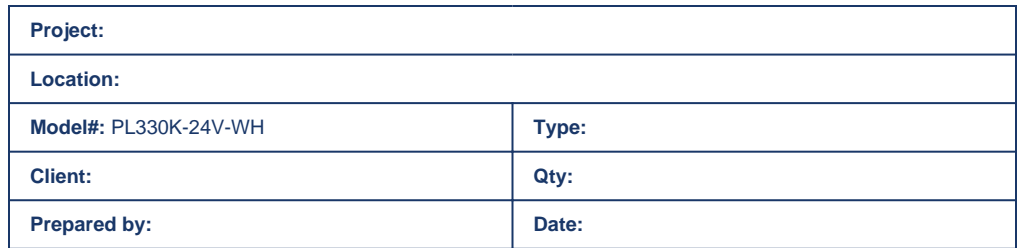

Colour Temperature: 3000K

Dimming: With RF Controls


Mounting: Surface or Recessed 59mm dia.

Box Dimensions (L-W-H): 65 x 65 x 20 mm

Project:	
Location:	
Model#: PL330K-24V-WH	Type:
Client:	Qty:
Prepared by:	Date:

LINE DRAWING

Line Drawings

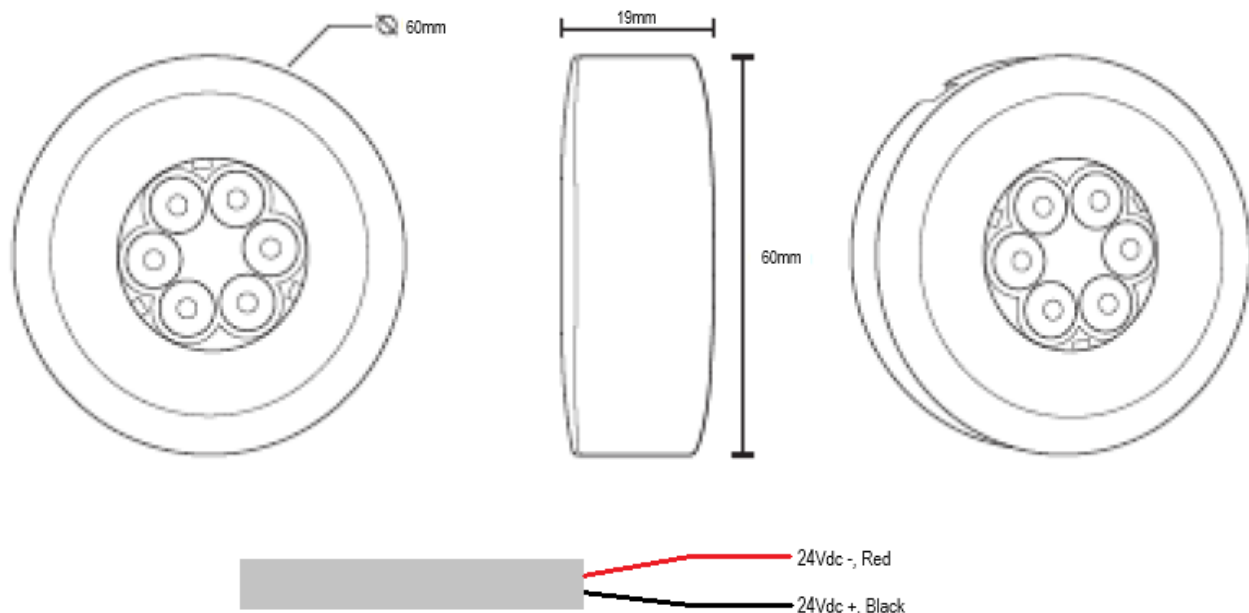

SERIES ARCHITECTURE

Optional Extras: PL-YCON