

Project:	
Location:	
Model#: TLPE244040K-UNV-WH	Type:
Client:	Qty:
Prepared by:	Date:

SERIES SPECIFICATIONS




To supply TamLite's TLPE Series of LED Panel fixture as specified. The luminaire shall operate at 347 Vac and use an Everlight approved driver. The frame shall be constructed of painted aluminium with a PMMA diffuser. LEDs shall be as specified Everlight 67-21S LED chips. The luminaire shall be cULus Listed




PERFORMANCE SPECIFICATIONS

Luminance Distribution Chart

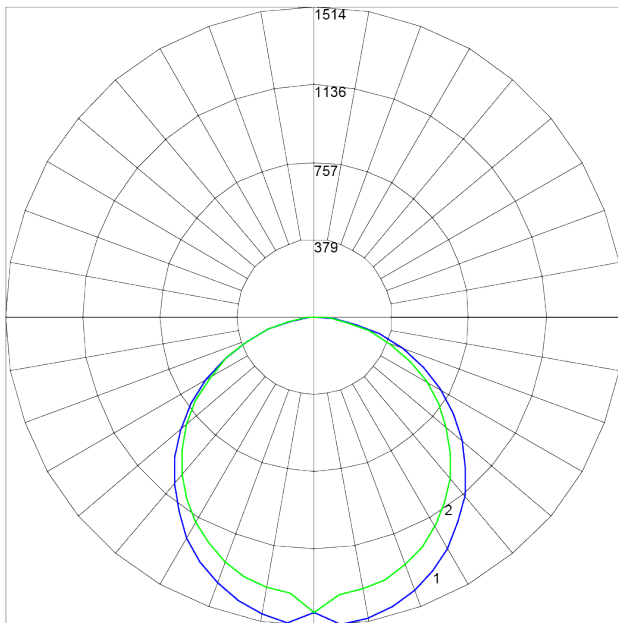

Maximum Candela = 1514.296 Located At Horizontal Angle = 90, Vertical Angle = 5
 # 1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.)
 # 2 - Vertical Plane Through Horizontal Angles (0 - 180)

Isolux Diagram

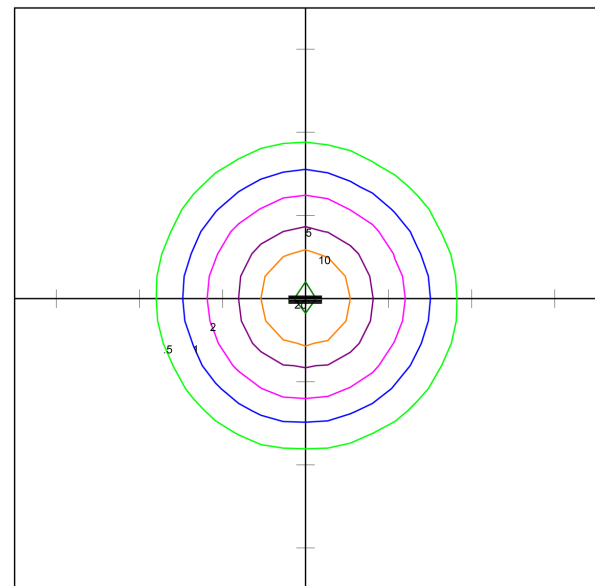

TAMLITE LIGHTING
 10 PERDUE CRT. CALEDON, ONTARIO
 TLPE2440-x-WH
 2X4 36W LED PANEL
 WITH WHITE TRANSLUCENT PANEL
 WHITE LEDS: OUTPUT = 4161.43 LMS.

Horizontal Footcandles
 Scale: 1 Inch = 10 Ft.
 Light Loss Factor = 1.00
 Lumens Per Lamp = 4161.43
 Total Lamp Lumens = 4161.43
 Mounting Height = 8.00 Ft
 Maximum Calculated Value = 22.58 Fc
 Arrangement: Single



Project:	
Location:	
Model#: TLPE244040K-UNV-WH	Type:
Client:	Qty:
Prepared by:	Date:

Zonal Lumen Summary

ZONE	LUMENS	ZONE	LUMENS	ZONE	LUMENS	ZONE	LUMENS	ZONE	LUMENS
0-10	137.32	40-50	751.41	80-90	73.79	120-130	0.00	160-170	0.00
10-20	394.45	50-60	679.18	90-100	0.14	130-140	0.00	170-180	0.00
20-30	598.76	60-70	514.20	100-110	0.00	140-150	0.00	--	--
30-40	723.30	70-80	288.82	110-120	0.00	150-160	0.00	--	--

Co-efficient of Utilization

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
fc	20				20				20			20			20			0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	104	100	96	106	102	98	94	97	94	91	93	91	88	90	88	86	84
2	99	91	84	78	96	89	82	77	85	80	75	82	77	73	79	75	72	70
3	90	79	71	65	88	78	70	64	75	68	63	72	66	62	69	65	61	59
4	82	70	61	55	80	69	61	54	66	59	54	64	58	53	62	57	52	50
5	76	63	54	47	74	62	53	47	59	52	46	57	51	46	56	50	45	43
6	70	56	47	41	68	55	47	41	54	46	40	52	45	40	50	44	40	38
7	65	51	42	36	63	50	42	36	49	41	36	47	41	35	46	40	35	33
8	60	47	38	32	59	46	38	32	45	37	32	43	37	32	42	36	32	30
9	56	43	35	29	55	42	34	29	41	34	29	40	33	29	39	33	28	27
10	53	39	32	26	51	39	31	26	38	31	26	37	31	26	36	30	26	24

Initial Lumen Output: 4110 lm

Luminaire Type: Direct

UL Classification: Dry Location Only

DLC Number: PNRH79HH

Efficacy: 114 lm/W

Spacing Criteria: 1.30 (Along), 1.30 (Across)

Ambient Operating Temp: -20°C to +40°C

CCN Number: IFA07.E470484

CBCP: 1500 cd

Environmental Rating(s): IP20

Certification Standards: cULus, DLC

Limited Product Warranty: 5 Years


Project:	
Location:	
Model#: TLPE244040K-UNV-WH	Type:
Client:	Qty:
Prepared by:	Date:

LED SPECIFICATIONS

R Tables

R1	81	R9	9
R2	90	R10	76
R3	96	R11	79
R4	80	R12	56
R5	81	R13	85
R6	86	R14	98
R7	86	R15	75
R8	64	--	--

SPD

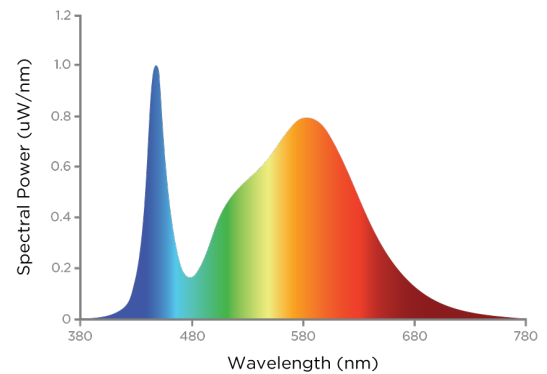

Source Type: LED

CRI: >80

Chromaticity: x=0.3843 y=0.3844

Manufacturer: Everlight®

L90: 54,000 Hrs

Colour Tolerance: 3 SDCM

Part Number: 67-21S

Colour Temperature: 4000K

Duv: 0.0024

ELECTRICAL SPECIFICATIONS

Input Voltage: 347 Vac

Power Factor @347Vac: >.90

Short Circuit Protection: Auto Recovery.

The output shall return to normal when the fault condition is removed.

Input Frequency: 50-60 Hz

Dimming: 1-10VDC, (10% Min Light Level)

Driver Certifications: c-RU-us Class 2,

FCC Part 15 Class B, RoHS

Fixture Draw: 39.1 W

Dimming Current mA: 0.2

PHYSICAL SPECIFICATIONS

Finish Colour: White

Housing Material: Aluminium

Weight: 9.1 kg

Finish Type: Powder Coated

Lens Material: PMMA

Entries: 4.500" Knockouts

Wiring: Junction Box

Lens Type: Diffuser

SHIPPING INFORMATION

OrderingCode(s): TLPE244040K-347V-WH

Box Weight: 19.3 kg

Box Quantity: 2

Box Dimensions (L-W-H): 1320 x 715 x 140 mm

Project:	
Location:	
Model#: TLPE244040K-UNV-WH	Type:
Client:	Qty:
Prepared by:	Date:

LINE DRAWING

Line Drawings

