

Project:		
Location:		
Model#: SCL103K-UNV-BK	Туре:	
Client:	Qty:	
Prepared by:	Date:	

SERIES SPECIFICATIONS



To supply Tamlite's SCL Series of LED Wall Light Luminaire as specified. The luminaire shall operate at 120-277Vac. The housing shall be constructed of powder coated die-cast Aluminium with impact resistant polycarbonate lense A selection of interchangeable trims. The LEDs shall be as specified LUMILEDS® LUXEON 3030 2D LED chips. The luminaire shall be cULus Listed.















PERFORMANCE SPECIFICATIONS

Luminance Distribution Chart

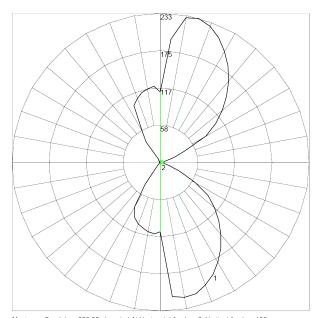

Maximum Candela = 233.08 Located At Horizontal Angle = 0, Vertical Angle = 165 # 1 - Vertical Plane Through Horizontal Angles (0 - 180) # 2 - Vertical Plane Through Horizontal Angles (90 - 270)

Isolux Diagram

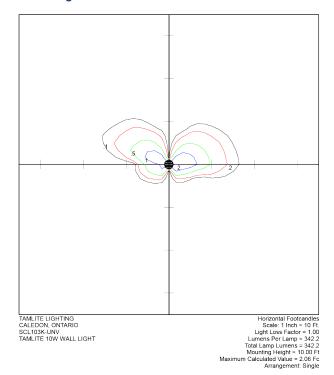



Project:		
Location:		
Model#: SCL103K-UNV-BK	Туре:	
Client:	Qty:	
Prepared by:	Date:	

Zonal Lumen Summary

ZONE	LUMENS	ZONE	LUMENS	ZONE	LUMENS	ZONE	LUMENS	ZONE	LUMENS
0-10	10.48	40-50	28.40	80-90	2.96	120-130	20.94	160-170	27.37
10-20	26.84	50-60	20.98	90-100	2.97	130-140	28.52	170-180	10.58
20-30	34.49	60-70	9.58	100-110	3.64	140-150	33.28		
30-40	33.10	70-80	3.58	110-120	9.56	150-160	35.01		

Initial Lumen Output: 818lm Environmental Rating(s): IP65 Certification Standards: UL Safety US-

CA

Efficacy: 81lm/W
UL Classification: Wet Location Listed

CCN Number: IFAM7.E359675

Luminaire Type: Direct, Indirect

Ambient Operating Temp: -25C to +40C


LED SPECIFICATIONS

R Tables

R1	82
R2	91
R3	96
R4	81
R5	82
R6	89
R7	84
R8	62

R9	9
R10	80
R11	80
R12	64
R13	84
R14	99
R15	75

SPD

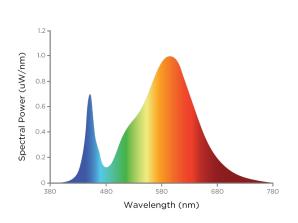

Source Type: LED CRI: >70

Chromaticity: x=0.4369 y=0.4041

Manufacturer: Lumileds®

L70: 36000 Hrs

Part Number: LUXEON 3030 2D Colour Temperature: 3000K



Project:		
Location:		
Model#: SCL103K-UNV-BK	Туре:	
Client:	Qty:	
Prepared by:	Date:	

ELECTRICAL SPECIFICATIONS

Input Frequency: 50-60Hz
Current Draw@ 277Vac: 0.0379

Dimming: 0-10Vdc, (0% Min Light Level)

Fixture Draw: 10.5W Max On-Delay: < 1 S

Short Circuit Protection: Auto Recovery. The output shall return to normal when the

fault condition is removed.

Current Draw@ 120Vac: 0.0867A Power Factor @277Vac: >.90

Driver Certifications: c-RU-us Class 2,

FCC Part 15 Class B, RoHS

PHYSICAL SPECIFICATIONS

Finish Colour: Black (RAL-9011)
Housing Material: ADC12 Aluminium

Finish Type: Textured Powder Coat over

Chromate Conversion Coat
Lens Material: PMMA

Mounting: Wall Mount Lens Type: Clear

SHIPPING INFORMATION

OrderingCode(s): SCL103K-UNV-BK (Fixture)

Carton Quantity: 12

Box Quantity: 1

Carton Dimensions (I-W-H): 498 x 291 x

300 mm

Box Dimensions (L-W-H): 483 x 92 x 70

mm



Project:		
Location:		
Model#: SCL103K-UNV-BK	Туре:	
Client:	Qty:	
Prepared by:	Date:	

LINE DRAWING

Line Drawings

