

Project:	
Location:	
Model#: AAFL12RGBWY-30D-24V	Type:
Client:	Qty:
Prepared by:	Date:

SERIES SPECIFICATIONS



Highlight architectural features or add emphasis to landscaping with the efficiency and flexibility of RGBW LED technology. Select from millions of colour combinations including 3000K white. The IP65 rated a die-cast Aluminium housing make this fixture built to last.



PERFORMANCE SPECIFICATIONS

Beam Angle: 30 deg

UL Classification: Wet Location Listed

Limited Product Warranty: 3 Year(s)

LED SPECIFICATIONS

Source Type: LED

Colour Temperature: RGB-W(5000K)

ELECTRICAL SPECIFICATIONS

Input Voltage: 24Vdc

Fixture Draw: 12.00 W

Max On-Delay: < 1S

Over Temperature Protection: Auto recovery. Current returns to normal after over temperature is removed.

PHYSICAL SPECIFICATIONS

Wiring: 1M - 5 conductor tail

Mounting: Yoke Mounting

Housing Material: Die-cast Aluminium


SHIPPING INFORMATION

OrderingCode(s): AAFL12RGBWY-30D-24V

Box Quantity: 1

LINE DRAWING

Line Drawings

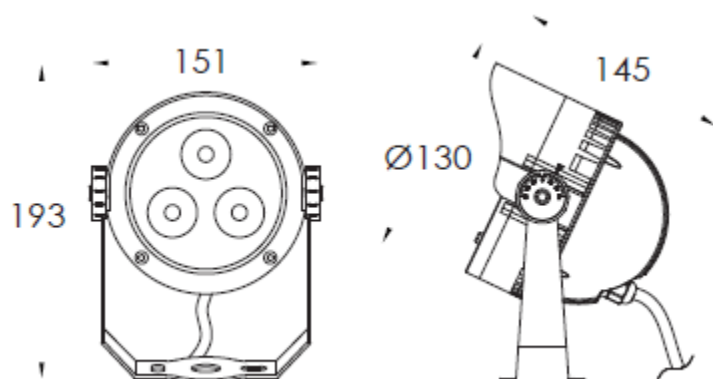

SERIES ARCHITECTURE

Series Architecture

AAFL -										
Part	Wattage		Colour	Mounting	Optics		Voltage		Finish	Options
AAFL	12	12W	RGBW3	Y Yoke	8	8 Degree	120	120Vac	BZ	Black
	36	36W			15	15 Degree	24	24Vdc ⁽³⁾	BK	Bronze
	72	72W	RGBW5		25	25 Degree			WH	White
					30	30 Degree			CC	Custom
					40	40 Degree				

1) Suitable for 120Vac versions only

2) Tuya phone app (iPhone or Android) by others

3) See Low Voltage Controls for more details

2022-11-17



Download the APP "TUYASMART" and register a new account or log in with an existing account.