

Project:	
Location:	
Model#: AAFL12RGBWY-30D-24V	Туре:
Client:	Qty:
Prepared by:	Date:

#### **SERIES SPECIFICATIONS**



Highlight architectural features or add emphasis to landscaping with the efficiency and flexibility of RGBW LED technology. Select from millions of color combinations including 3000K white. The IP65 rated a die-cast Aluminium housing make this fixture built to last.







DEDECDIMA	NICE SDEC	IFICATIONS
FENEURINA	INCE SEEL	JITICA HONG

Beam Angle: 30 Degree UL Classification: Wet Location Listed Limited Product Warranty: 3 Year(s)

### LED SPECIFICATIONS

Source Type: LED Colour Temperature: RGB-W(5000K)

### **ELECTRICAL SPECIFICATIONS**

Input Voltage: 24Vdc Fixture Draw: 12W Over Temperature Protection: Auto

recovery. Current returns to normal after

over temperature is removed.

#### PHYSICAL SPECIFICATIONS

Wiring: 1M - 5 conductor tail Mounting: Yoke Mounting Housing Material: Die-cast Aluminium

## SHIPPING INFORMATION


OrderingCode(s): AAFL12RGBWY-30D-24V

**Box Quantity: 1** 



Project:	
Location:	
Model#: AAFL12RGBWY-30D-24V	Туре:
Client:	Qty:
Prepared by:	Date:

## LINE DRAWING

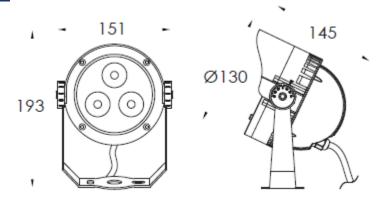

### SERIES ARCHITECTURE

# **Series Architecture**

Part '		ittage	Colour		M	lounting C	Optio	Optics		Voltage		Finish		Options	
<b>AAFL</b>	12	12W	DCDMA	Red, Green, Blue,	Υ	Yoke	8	8 Degree	120	120Vac	BZ	Black	TY	Tuya Control (1)(2	
	36	36W	RGBW3	White (3000K)			15	15 Degree	24	24Vdc <sup>(3)</sup>	ВК	Bronze			
	72	72W	RGBW5	Red, Green, Blue,			25	25 Degree			WH	White			
			KGBWS	White (5000K)			30	30 Degree			CC	Custom			
							40	40 Degree							
) Suita	ble	for 120V	ac versior	ns only											
) Tuya	pho	ne app	(iPhone or	Android) by others											
) See l	ow'	Voltage	Controls f	or more details											
														2022-11-17	



Download the APP "TUYASMART" and register a new account or log in with an existing account.