

Project:	
Location:	
Model#: AAFL12RGBWY-30D-24V	Туре:
Client:	Qty:
Prepared by:	Date:

SERIES SPECIFICATIONS



Highlight architectural features or add emphasis to landscaping with the efficiency and flexibility of RGBW LED technology. Select from millions of color combinations including 3000K white. The IP65 rated a die-cast Aluminium housing make this fixture built to last.







DEDECDIMA	NICE SDEC	IFICATIONS
FENEURINA	INCE SEEL	JITICA HONG

Beam Angle: 30 Degree UL Classification: Wet Location Listed Limited Product Warranty: 3 Year(s)

LED SPECIFICATIONS

Source Type: LED Colour Temperature: RGB-W(5000K)

ELECTRICAL SPECIFICATIONS

Input Voltage: 24Vdc Fixture Draw: 12W Over Temperature Protection: Auto

recovery. Current returns to normal after

over temperature is removed.

PHYSICAL SPECIFICATIONS

Wiring: 1M - 5 conductor tail Mounting: Yoke Mounting Housing Material: Die-cast Aluminium

SHIPPING INFORMATION


OrderingCode(s): AAFL12RGBWY-30D-24V

Box Quantity: 1



Project:	
Location:	
Model#: AAFL12RGBWY-30D-24V	Туре:
Client:	Qty:
Prepared by:	Date:

LINE DRAWING

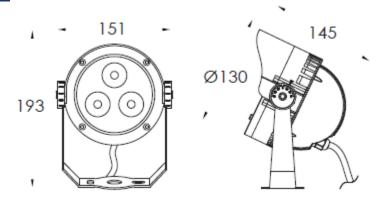

SERIES ARCHITECTURE

Series Architecture

Part	Wattage		Colour		Mc	lounting Op	Optio	S	Voltage		Finish		O	Options	
AAFL	12	12W	DCDMA	Red, Green, Blue,	Υ	Yoke	8	8 Degree	120	120Vac	BZ	Black	TY	Tuya Control (1)(2	
	36	36W	RGBW3	White (3000K)			15	15 Degree	24	24Vdc ⁽³⁾	BK	Bronze			
	72	72W	RGBW5	Red, Green, Blue,			25	25 Degree			WH	White			
				White (5000K)			30	30 Degree			CC	Custom			
							40	40 Degree							
l) Suita	ble	for 120V	ac versior	ns only											
2) Tuya	pho	ne app	(iPhone or	Android) by others											
3) See L	ow '	Voltage	Controls f	or more details											
														2022-11-17	



Download the APP "TUYASMART" and register a new account or log in with an existing account.