



Project:	
Location:	
Model#: SM1224-SW-120-WH	Type:
Client:	Qty:
Prepared by:	Date:


**SERIES SPECIFICATIONS**

To supply Tamlite SM12 series of LED fixtures as specified




**PERFORMANCE SPECIFICATIONS**

**Luminance Distribution Chart**

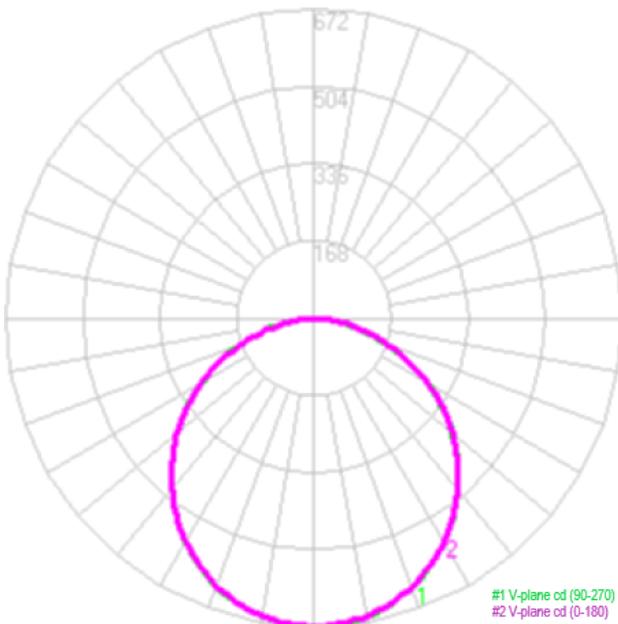

**Isolux Diagram**

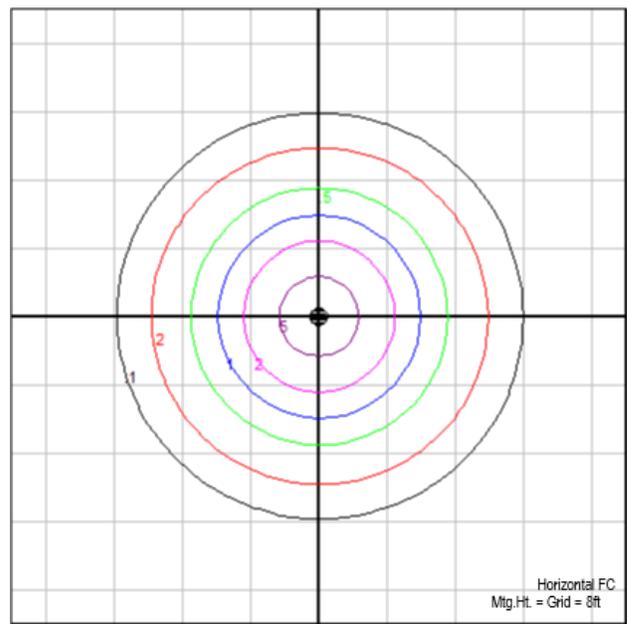

**Zonal Lumen Summary**

Zone	Lumens	Zone	Lumens	Zone	Lumens	Zone	Lumens	Zone	Lumens	Zone	Lumens
0-10	63.46	30-40	328.55	60-70	226.97	90-100	0	120-130	0	150-160	0
10-20	181.41	40-50	338.88	70-80	124.84	100-110	0	130-140	0	160-170	0
20-30	273.87	50-60	303.82	80-90	30.25	110-120	0	140-150	0	170-180	0

Total Initial Lumen Output; 1872.05 lm



Project:	
Location:	
Model#: SM1224-SW-120-WH	Type:
Client:	Qty:
Prepared by:	Date:

SHIPPING INFORMATION

OrderingCode(s): SM1224-SW-IP20

Carton Quantity: 10

Box Quantity: 1

Carton Dimensions (I-W-H):


47.2cm(18.58")\*34.1cm(13.43")\*32.9cm(12.95")

Box Dimensions (L-W-H):

4.7cm(1.8")\*34.1cm(13.43")\*32.9cm(12.95")

LINE DRAWING

Line Drawings

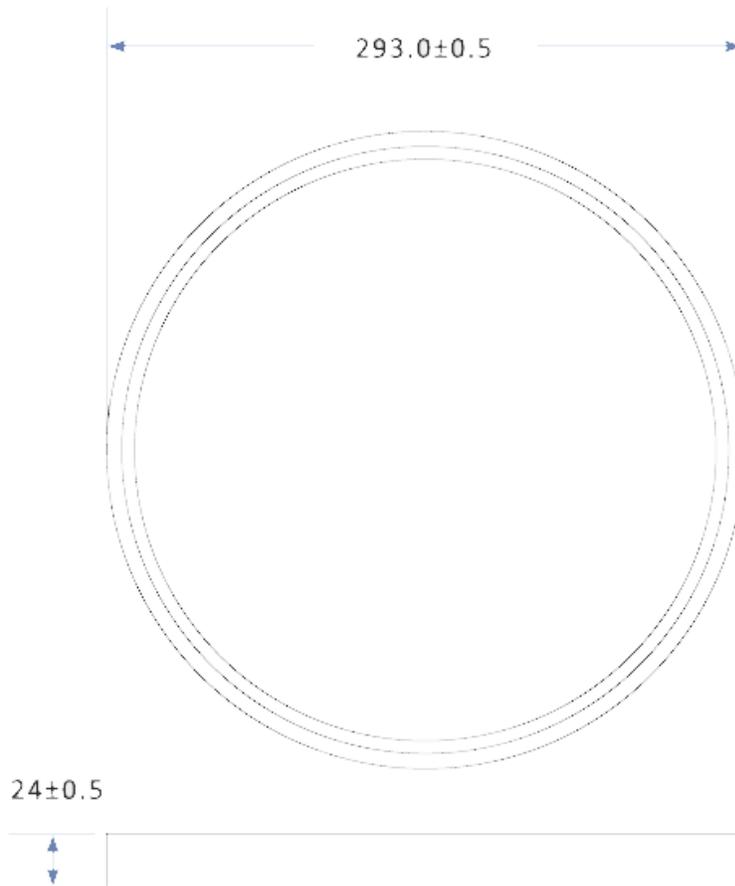



Project:	
Location:	
Model#: SM1224-SW-120-WH	Type:
Client:	Qty:
Prepared by:	Date:

SERIES ARCHITECTURE

Series Architecture

SM - 12 - 24 - sw - 120 - WH -

Part	Size		Wattage		Colour		Voltage		Finish		Mounting Options	
SM	12	12 inch	24	24W	SW	Selectable White	120	120Vac	WH	White	blank	Flush Mount
						3000K, 4000K, 5000K					SFM	Semi Flush Mount

2022-12-02