



Project:	
Location:	
Model#: TLPE143635K-347-WH	Type:
Client:	Qty:
Prepared by:	Date:


SERIES SPECIFICATIONS

To supply Tamlite's TLPE Series of LED Panel fixture as specified. The luminaire shall operate at 347Vac and use an Everlight approved driver. The frame shall be constructed of painted aluminium with a PMMA diffuser. LEDs shall be as specified Everlight 67-21S LED chips. The luminaire shall be cULus Listed and DLC Listed. The fixture shall be DLC listed.




PERFORMANCE SPECIFICATIONS

Luminance Distribution Chart

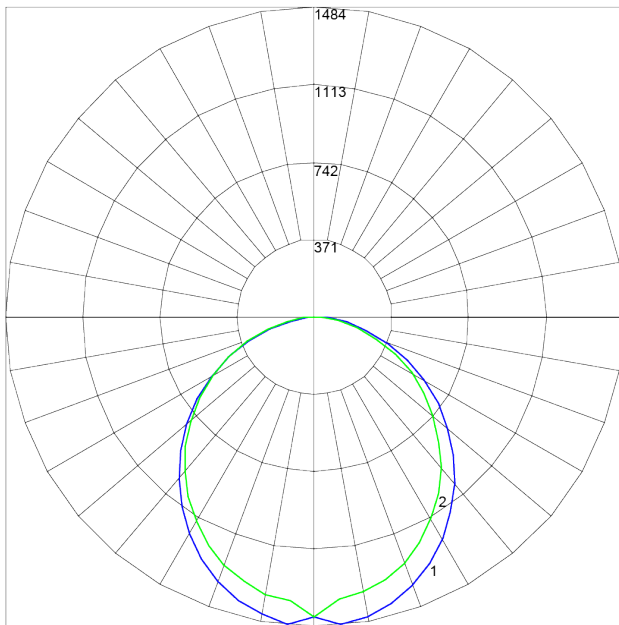

Maximum Candela = 1484.22 Located At Horizontal Angle = 90, Vertical Angle = 5
 # 1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.)
 # 2 - Vertical Plane Through Horizontal Angles (0 - 180)

Isolux Diagram

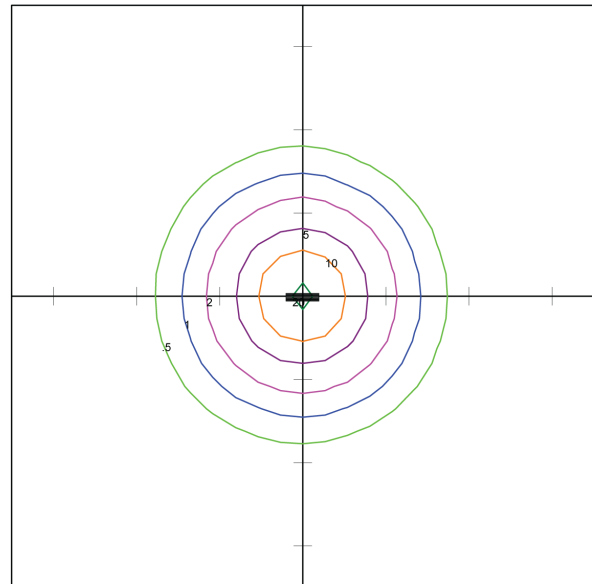

TAMLITE LIGHTING CANADA
 CALEDON, ONTARIO
 TLPE1436-UNV-WH
 1x4 36W LED FLAT PANEL
 WITH WHITE TRANSLUCENT PANEL
 WHITE LEDs. OUTPUT = 3880.77 LMS.

Horizontal Footcandles
 Scale: 1 Inch = 10 Ft.
 Light Loss Factor = 1.00
 Lumens Per Lamp = 3880.77
 Total Lamp Lumens = 3880.77
 Mounting Height = 8.00 Ft
 Maximum Calculated Value = 22.52 Fc
 Arrangement: Single



Project:	
Location:	
Model#: TLPE143635K-347-WH	Type:
Client:	Qty:
Prepared by:	Date:

Zonal Lumen Summary

ZONE	LUMENS	ZONE	LUMENS	ZONE	LUMENS	ZONE	LUMENS	ZONE	LUMENS
0-10	136.56	40-50	698.91	80-90	60.81	120-130	0.00	160-170	0.00
10-20	388.76	50-60	618.08	90-100	0.00	130-140	0.00	170-180	0.00
20-30	580.95	60-70	458.36	100-110	0.00	140-150	0.00	--	--
30-40	687.75	70-80	250.54	110-120	0.00	150-160	0.00	--	--

Co-efficient of Utilization

RC	80				70				50			30			10			0	
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0	
fc	20				20				20			20			20			0	
RCR																			
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	
1	109	104	100	96	106	102	98	95	98	95	92	94	91	89	90	88	86	84	
2	99	91	84	79	97	89	83	78	86	80	76	82	78	74	79	76	73	70	
3	91	80	72	66	88	79	71	65	76	69	64	73	67	63	70	66	62	60	
4	83	71	62	56	81	70	62	55	67	60	55	65	59	54	63	57	53	51	
5	76	64	55	48	74	62	54	48	60	53	47	58	52	47	57	51	46	44	
6	71	57	48	42	69	56	48	42	55	47	41	53	46	41	51	45	41	39	
7	65	52	43	37	64	51	43	37	50	42	37	48	41	36	47	41	36	34	
8	61	47	39	33	59	47	39	33	45	38	33	44	38	33	43	37	32	31	
9	57	44	35	30	56	43	35	30	42	35	30	41	34	30	40	34	29	28	
10	53	40	32	27	52	40	32	27	39	32	27	38	31	27	37	31	27	25	

Initial Lumen Output: 3880lm
Luminaire Type: Direct
UL Classification: Dry Location Only
CCN Number: IFAO7.E470484

Efficacy: 115.5lm/W
Spacing Criteria: 1.16 (C0-180), 1.34 (C90-270)
Ambient Operating Temp: -20C to +40C
Limited Product Warranty: 5 Year(s)

CBCP: 1475cd
Environmental Rating(s): IP20
Certification Standards: cULus, DLC

Project:	
Location:	
Model#: TLPE143635K-347-WH	Type:
Client:	Qty:
Prepared by:	Date:


LED SPECIFICATIONS

R Tables

R1	82
R2	92
R3	96
R4	80
R5	82
R6	89
R7	83
R8	60

R9	7
R10	80
R11	80
R12	66
R13	85
R14	98
R15	75
--	--

SPD

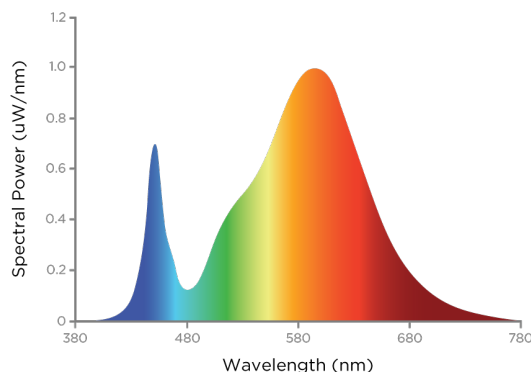

Source Type: LED
CRI: >80
Chromaticity: x=0.4051 y=0.3929

Manufacturer: Everlight®
L90: 54,000 Hrs
Colour Tolerance: 3 SDCM

Part Number: 67-21S
Colour Temperature: 3500K
Duv: 0.001

ELECTRICAL SPECIFICATIONS

Input Voltage: 347Vac
Power Factor @277Vac: >.90
Dimming: 1-10Vdc, (10% Min Light Level)
Driver Certifications: c-RU-us Class 2, FCC Part 15 Class B, RoHS

Input Frequency: 50-60Hz
Power Factor @347Vac: >.90
Dimming Current mA: 0.2

Fixture Draw: 33.6W
THD @277Vac(%): <15%
Short Circuit Protection: Auto Recovery.
 The output shall return to normal when the fault condition is removed.

PHYSICAL SPECIFICATIONS

Finish Colour: White
Housing Material: Aluminium
Weight: 9.1 kg

Finish Type: Powder Coated
Lens Material: PMMA
Entries: 4.500" Knockouts

Wiring: Junction Box
Lens Type: Diffuser

SHIPPING INFORMATION

OrderingCode(s): TLPE143635K-347V-WH
Box Weight: 9.5 kg


Box Quantity: 2

Box Dimensions (L-W-H): 715 x 715 x 115 mm

Project:	
Location:	
Model#: TLPE143635K-347-WH	Type:
Client:	Qty:
Prepared by:	Date:

LINE DRAWING

Line Drawings

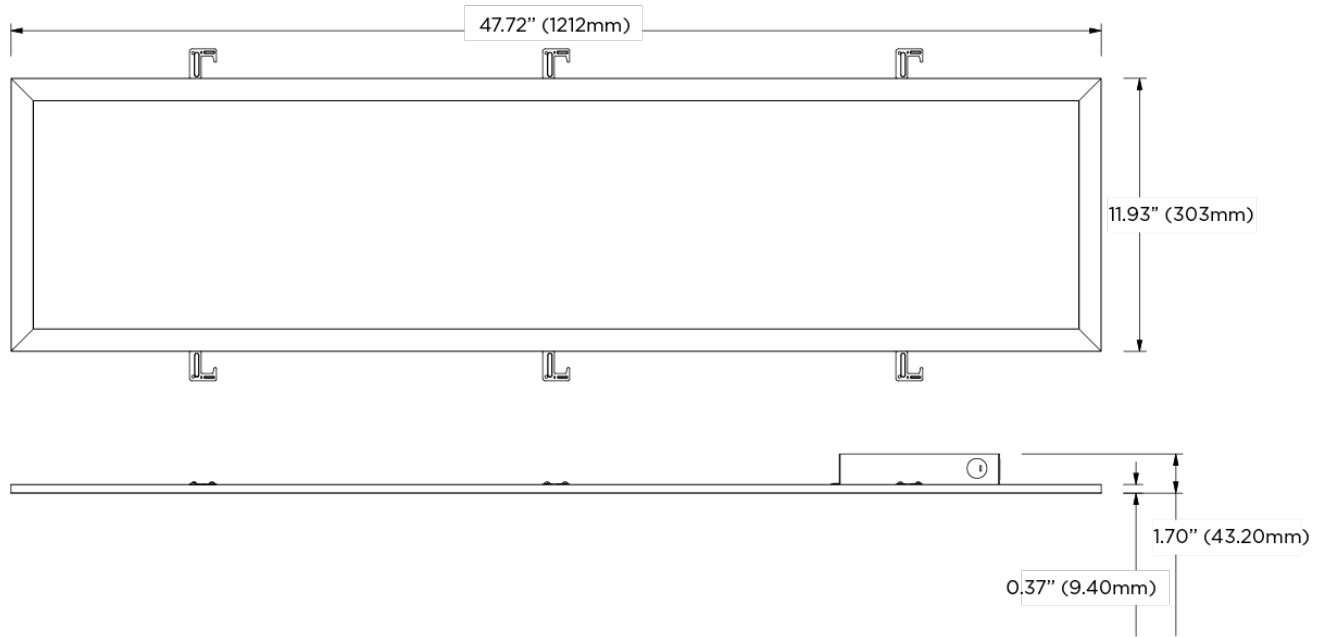

SERIES ARCHITECTURE

Series Architecture

TLPE Nomenclature

Part	Size	Wattage	CCT	Mounting	Voltage	Finish
TLPE	14 1x4ft	36 36W	30K 3000K	[blank] T-Bar	UNV 120-277VAC	WH White
	22 2x2ft	40 40W	35K 3500K	DF Drywall Flange	UN4 347VAC	
	24 2x4ft	48 48W	40K 4000K	SF Surface Mount		
		60 60W	50K 5000K	SU Suspended		

Optional Extras: TLP14SMK-WH TLP14SPK TLP14DFK-WH