



Project:	
Location:	
Model#: TLP14SMK-WH	Type:
Client:	Qty:
Prepared by:	Date:

SERIES SPECIFICATIONS

To supply Tamlite flat panel surface mounting kit.



PERFORMANCE SPECIFICATIONS

Environmental Rating(s): IP20

UL Classification: Dry Location Only

Certification Standards: cULus

PHYSICAL SPECIFICATIONS

Finish Colour: White

Finish Type: Powder Coated

Mounting: Surface

Housing Material: Aluminium

SHIPPING INFORMATION

OrderingCode(s): TLP14SMK-WH

Box Weight: 12.5 kg

Box Quantity: 1

Box Dimensions (L-W-H): 1320 x 415 x 140 mm

Carton Weight: 12.5

Carton Quantity: 2


Carton Dimensions (I-W-H): 1320 x 415 x 140 mm



Project:	
Location:	
Model#: TLP14SMK-WH	Type:
Client:	Qty:
Prepared by:	Date:

LINE DRAWING

Line Drawings

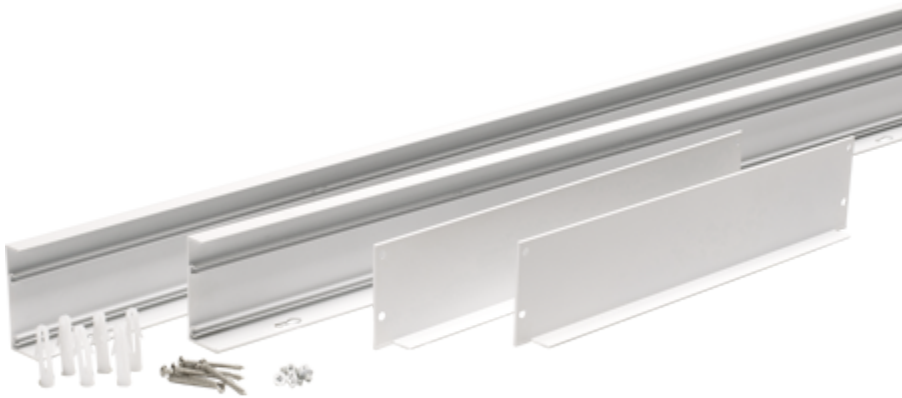



Project:	
Location:	
Model#: TLP14SMK-WH	Type:
Client:	Qty:
Prepared by:	Date:

SERIES ARCHITECTURE

Series Architecture

TLPE Nomenclature

Part	Size	Wattage		CCT		Mounting		Voltage		Finish		
TLPE	14	1x4ft	36	36W	30K	3000K	[blank]	T-Bar	UNV	120-277VAC	WH	White
	22	2x2ft	40	40W	35K	3500K	DF	Drywall Flange	UN4	347VAC		
	24	2x4ft	48	48W	40K	4000K	SF	Surface Mount				
			60	60W	50K	5000K	SU	Suspended				

Optional Extras: TLP14SPK Suspension kit