

Project:	
Location:	
Model#: TASLL3BZ	Type:
Client:	Qty:
Prepared by:	Date:

SERIES SPECIFICATIONS




To supply Tamllite's TASLL Series of LED Step Light Luminaire as specified. The Luminaire shall operate at 120Vac. The face plate shall be constructed of powder coated steel. The lens shall be either vertical louvered, horizontal louvered or open diffused. LEDs shall be as specified Hongli LED chips. The luminaire shall be c-UL-us listed.




PERFORMANCE SPECIFICATIONS

Luminance Distribution Chart

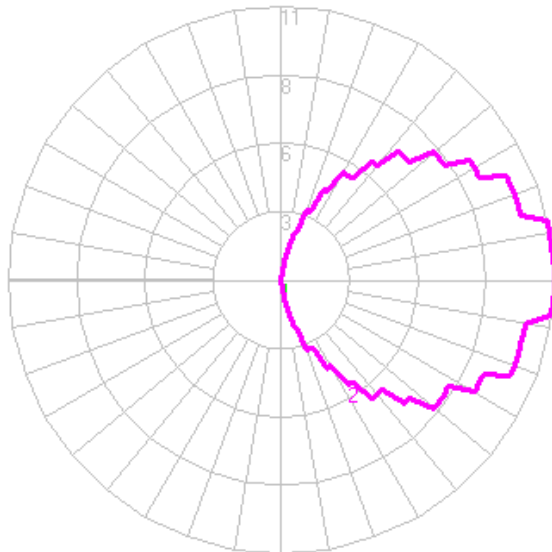

Isolux Diagram

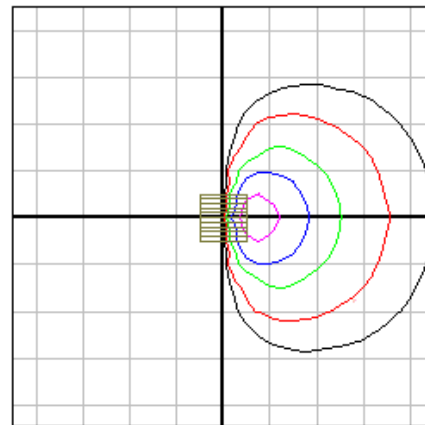

Initial Lumen Output: 29lm
UL Classification: Dry Location Listed


Max Candela: 11cd
Certification Standards: cULus

Environmental Rating(s): IP44
Limited Product Warranty: 1 year

Project:	
Location:	
Model#: TASLL3BZ	Type:
Client:	Qty:
Prepared by:	Date:

LED SPECIFICATIONS

SPD

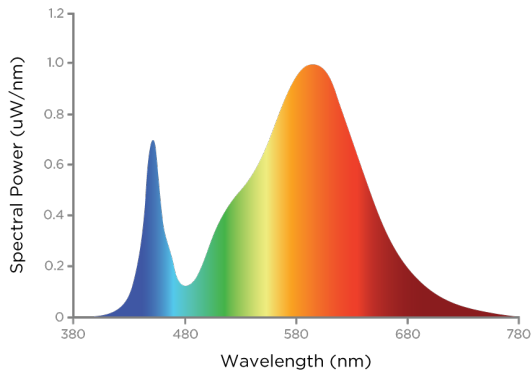

Source Type: LED

Colour Temperature: 3000K

ELECTRICAL SPECIFICATIONS

Input Voltage: 120Vac

Input Frequency: 50-60Hz

Fixture Draw: .75W

Current Draw@ 120Vac: 0.0100A

PHYSICAL SPECIFICATIONS

Finish Colour: Bronze

Finish Type: Powder Coat

Mounting: Recessed J-Box Mount

SHIPPING INFORMATION

OrderingCode(s): TASLL3BZ

Box Quantity: 1

Box Dimensions (L-W-H): 77 x 44 x 120 mm

Box Weight: .23 kg

Carton Quantity: 24

Carton Dimensions (I-W-H): 270 x 250 x 245 mm

Carton Weight: 5.4 kg

Project:	
Location:	
Model#: TASLL3BZ	Type:
Client:	Qty:
Prepared by:	Date:

LINE DRAWING

Line Drawings

