

Project:		
Location:		
Model#:	TASLL3BZ	Type:
Client:		Qty:
Prepared by:		Date:

## SERIES SPECIFICATIONS




To supply Tamlite's TASLL Series of LED Step Light Luminaire as specified. The Luminaire shall operate at 120Vac. The face plate shall be constructed of powder coated steel. The lens shall be either vertical louvered, horizontal louvered or open diffused. LEDs shall be as specified Hongli LED chips. The luminaire shall be c-UL-us listed.




## PERFORMANCE SPECIFICATIONS

Luminance Distribution Chart

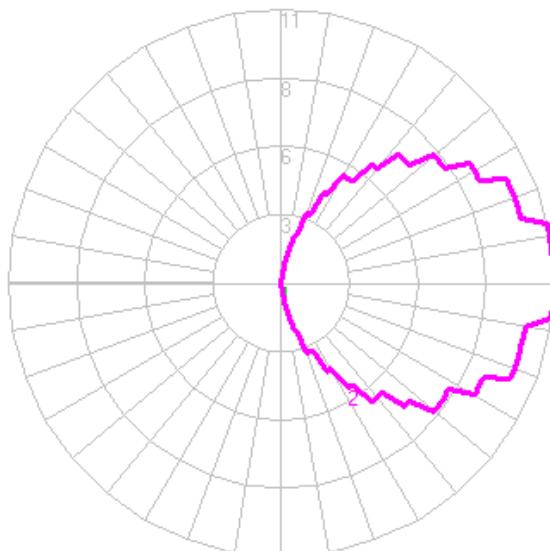

Isolux Diagram

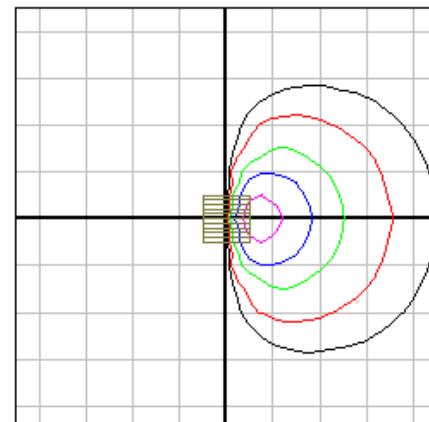

**Initial Lumen Output:** 29lm

**UL Classification:** Dry Location Listed

**Max Candela:** 11cd


**Certification Standards:** cULus

**Environmental Rating(s):** IP44

**Limited Product Warranty:** 1 year

## LED SPECIFICATIONS

### SPD

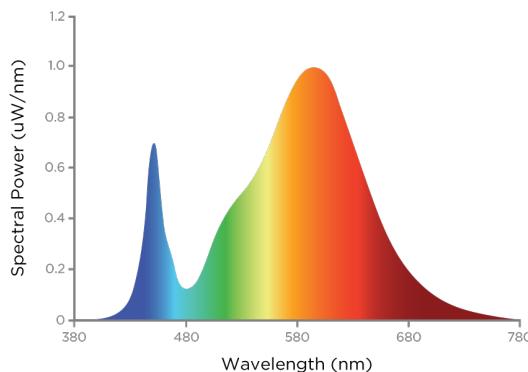

**Source Type:** LED

**Colour Temperature:** 3000K

## ELECTRICAL SPECIFICATIONS

**Input Voltage:** 120Vac

**Current Draw@ 120Vac:** 0.0100A

**Input Frequency:** 50-60Hz

**Fixture Draw:** .75W

## PHYSICAL SPECIFICATIONS

**Finish Colour:** Bronze

**Finish Type:** Powder Coat

**Mounting:** Recessed J-Box Mount

## SHIPPING INFORMATION

**OrderingCode(s):** TASLL3BZ

**Box Weight:** .23 kg

**Carton Weight:** 5.4 kg

**Box Quantity:** 1

**Carton Quantity:** 24

**Box Dimensions (L-W-H):** 77 x 44 x 120

mm

**Carton Dimensions (L-W-H):** 270 x 250 x

245 mm

## LINE DRAWING

### Line Drawings

