

Project:				
Location:				
Model#: WPG4040K-347V-BK	Туре:			
Client:	Qty:			
Prepared by:	Date:			

SERIES SPECIFICATIONS



To supply Tamlite WPG series of LED fixtures as specified. The luminaire shall operate at 347Vac, and use a CITIZEN® approved driver. The housing shall be constructed of powdercoated Aluminium with a hinged bolt-on case for replacement access and a tempered glass lens. A durable formed gasket shall be provided between the enclosure and the lens. The reflector shall be made of highly specular material and contoured to maximize light output efficiency. All parts shall be corrosion resistant. LEDs shall be as specified, CITIZEN® CLU038-1208 LED Chips. The LEDs shall be supplied with the luminaire. The luminaire shall be cULus Listed.














PERFORMANCE SPECIFICATIONS


Luminance Distribution Chart



Maximum Candela = 2345.75 Located At Horizontal Angle = 22.5, Vertical Angle = 45

- # 1 Vertical Plane Through Horizontal Angles (0 180) # 2 Vertical Plane Through Horizontal Angles (0 270) # 3 Horizontal Cone Through Vertical Angles (45) (Through Max. Cd.)

Isolux Diagram

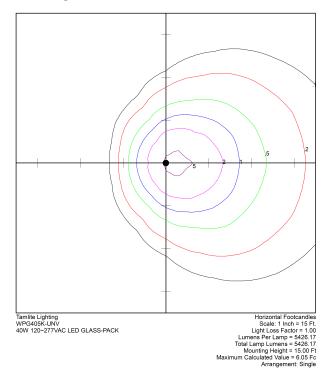



Project:			
Location:			
Model#: WPG4040K-347V-BK	Туре:		
Client:	Qty:		
Prepared by:	Date:		

Zonal Lumen Summary

ZONE	LUMENS	ZONE	LUMENS	ZONE	LUMENS	ZONE	LUMENS	ZONE	LUMENS
0-10	110.84	40-50	669.48	80-90	514.83	120-130	59.67	160-170	1.02
10-20	310.37	50-60	655.74	90-100	390.6	130-140	36.48	170-180	0.21
20-30	472.62	60-70	635.75	100-110	252.73	140-150	20.17		
30-40	563.01	70-80	599.29	110-120	126.1	150-160	7.25		

Initial Lumen Output: 49940Im Luminaire Type: Wall Pack Non-Cut-off Ambient Operating Temp: -40C to +40C CCN Number: IFAM7.E359675 Efficacy: 122.5lm/W
Environmental Rating(s): IP65
Certification Standards: cETLus, DLC
Limited Product Warranty: 5 Year(s)


Max Candela: 2345

UL Classification: Wet Location Listed

DLC Number: YYYDPD

LED SPECIFICATIONS

SPD

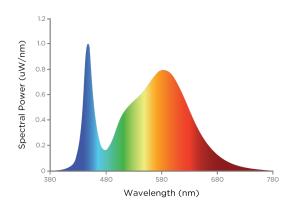

Source Type: LED CRI: > 80

Chromaticity: x=0.3462 y=0.3612

Manufacturer: Citizen® L70: 102000 Hrs

Duv: 0.00429

Part Number: CLU038-1208
Colour Temperature: 4000K



Project:				
Location:				
Model#: WPG4040K-347V-BK	Туре:			
Client:	Qty:			
Prepared by:	Date:			

ELECTRICAL SPECIFICATIONS

Driver Manufacturer: IPP Fixture Draw: 40.327W THD @347Vac(%): <15%

Dimming: 1-10Vdc, (10% Min Light Level) **Driver Certifications:** c-RU-us Class 2,

FCC Part 15 Class B, RoHS

Input Voltage: 277~480Vac Current Draw@347Vac: 0.12181985149741 Driver MTBF: 50,000hrs

Over Temperature Protection: Auto Recovery, The fixture shall shut down and

return to operation when the temperature returns to normal.

Input Frequency: 50-60Hz Power Factor @347Vac: >.90

Max Operating Case Temperature: 90C Short Circuit Protection: Auto Recovery. The output shall return to normal when the

fault condition is removed.

PHYSICAL SPECIFICATIONS

Finish Colour: Black
Mounting: Wall Mount
Lens Type: Clear - Prismatic

Finish Type: Textured powder coat over

chromate conversion coat

Housing Material: ADC12 Aluminium **Reflector Material:** Specular Aluminium

Wiring: Internal Connections
Lens Material: Glass

Entries: (3) 1/2 inch threaded knockouts

SHIPPING INFORMATION

OrderingCode(s): WPG403K-347V-BK

Box Weight: 4.92 kg Carton Weight: 20.88 Box Quantity: 1
Carton Quantity: 4

Box Dimensions (L-W-H): $370 \times 245 \times$

205 mm

Carton Dimensions (I-W-H): 510 x 385 x

410 mm

SERIES ARCHITECTURE

Series	Wattage	ССТ	Voltage	Finish
WPG	40 (40W)	SW (Selectable)	UNV (120-277V)	BZ (Bronze)
	80 (80W)	30K (3000K)	347V (347V)	BK (Black)
	120 (120W)	40K (4000K)	WRV (120-347V)	WH (White)
		50K (5000K)		XX (other)

Optional Extras: Cut off Shield