

Project:	
Location:	
Model#: TLSF810030K-WRV	Type:
Client:	Qty:
Prepared by:	Date:

SERIES SPECIFICATIONS




To supply TamLite TLSF Series of LED fixtures as specified. The luminaire shall operate at 120~347Vac and use a 1-10Vdc, (10% Min Light Level), with optional Z10-IROC Occupancy Sensor dimmable, constant current type BeautyPower driver. The housing shall be constructed of heavy gauge steel with a smooth powder coat over chromate conversion coat. All hardware to be stainless steel. Bottom access wiring compartment to be supported by aircraft cable for servicing. Fixtures to come standard with a Z-10 socket and cap. Optics to be constructed of PMMA complete with a Frosted lense. LED's shall be as specified Shenzhen Runlite Technology Co. Ltd T28351. Fixture shall be cULus, DLC listed.




PERFORMANCE SPECIFICATIONS

Luminance Distribution Chart

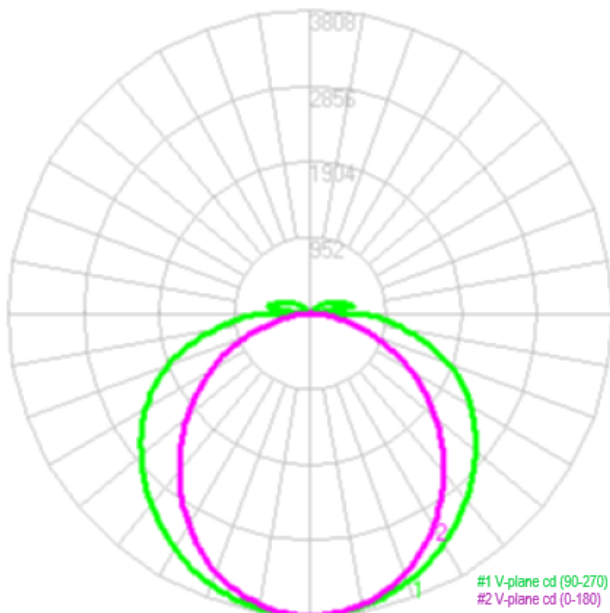

Isolux Diagram

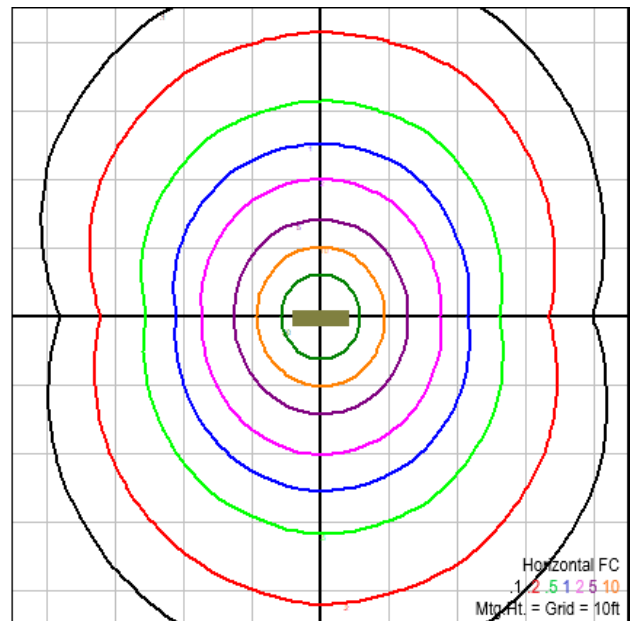



Project:	
Location:	
Model#: TLSF810030K-WRV	Type:
Client:	Qty:
Prepared by:	Date:

Zonal Lumen Summary

Zone	Lumens	Zone	Lumens	Zone	Lumens	Zone	Lumens	Zone	Lumens	Zone	Lumens
0-10	360.17	30-40	1910.55	60-70	1691.93	90-100	138.51	120-130	77.45	150-160	3.57
10-20	1032.12	40-50	2035.95	70-80	1252.69	100-110	253.96	130-140	24.16	160-170	2.31
20-30	1568.53	50-60	1953.61	80-90	687.76	110-120	155.88	140-150	5.19	170-180	0.98

Co-efficient of Utilization

cc	80				70				50			30			10			0
wall	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
fc	20				20				20			20			20			0
RCR																		
0	117	117	117	117	113	113	113	113	107	107	107	100	100	100	95	95	95	92
1	105	99	94	89	101	96	91	87	90	86	83	85	81	79	80	77	75	72
2	94	85	77	71	91	82	75	69	77	71	66	73	68	63	68	64	61	58
3	85	74	65	58	82	71	63	56	67	60	54	63	57	52	60	55	50	48
4	78	65	55	48	75	63	54	47	59	52	46	56	49	44	53	47	43	40
5	71	57	48	41	68	56	47	40	53	45	39	50	43	38	47	41	37	34
6	66	51	42	35	63	50	41	35	47	40	34	45	38	33	43	37	32	30
7	61	47	37	31	58	45	37	31	43	35	30	41	34	29	39	33	28	26
8	56	42	33	27	54	41	33	27	39	32	26	37	31	26	36	30	25	23
9	53	39	30	25	51	38	30	24	36	29	24	34	28	23	33	27	23	21
10	49	36	28	22	47	35	27	22	33	26	21	32	25	21	30	25	20	19

Initial Lumen Output: 13151lm

Luminaire Type: Semi-Direct

Ambient Operating Temp: -20C to +40C

Limited Product Warranty: 5 Year(s)

Efficacy: 129.31lm/W

Environmental Rating(s): IP20

Certification Standards: cULus, DLC

CBCP: 3808cd

UL Classification: Dry Location Only

CCN Number: IFAM7.E359675


Project:	
Location:	
Model#: TLSF810030K-WRV	Type:
Client:	Qty:
Prepared by:	Date:

LED SPECIFICATIONS


R Tables

R1	81	R9	6
R2	91	R10	81
R3	96	R11	80
R4	81	R12	71
R5	82	R13	84
R6	90	R14	98
R7	82	R15	74
R8	59	Ra	85

SPD

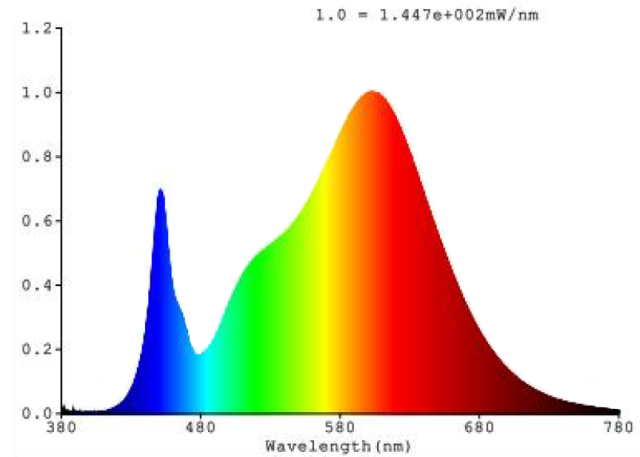

TM-30

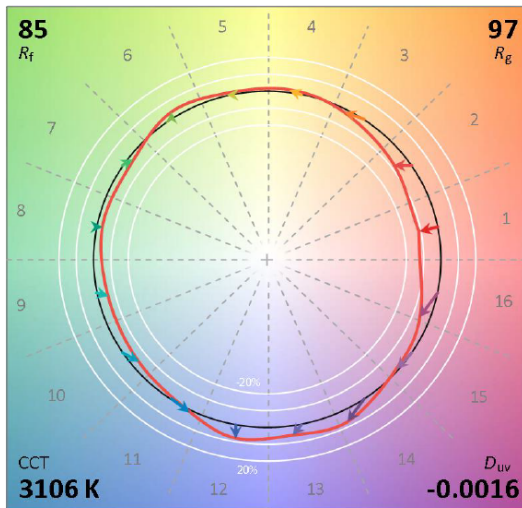

Source Type: LED
CRI: >80
L70: 50000 Hrs
Duv: 0.0014

Manufacturer: Shenzhen Runlite
 Technology Co. Ltd
Rf: 84
Colour Temperature: 3000K

Part Number: T28351
Rg: 96
Chromaticity: x=0.4274 y=0.3969



Project:	
Location:	
Model#: TLSF810030K-WRV	Type:
Client:	Qty:
Prepared by:	Date:

ELECTRICAL SPECIFICATIONS

Driver Manufacturer: BeautyPower
Fixture Draw: 102.4W
Current Draw@347Vac: 0.2865
Power Factor @347Vac: >.90
THD @347Vac(%): <10%
Short Circuit Protection: Auto Recovery.
The output shall return to normal when the fault condition is removed.

Input Voltage: 120~347Vac
Current Draw@ 120Vac: 0.8283
Max On-Delay: < 1 S
THD @ 120Vac(%): <10%
Dimming: 1-10Vdc, (10% Min Light Level), with optional Z10-IROC Occupancy Sensor
Driver Certifications: c-RU-us Class 2, FCC Part 15 Class B, RoHS

Input Frequency: 50-60Hz
Current Draw@ 277Vac: 0.3588
Power Factor @120Vac: >.90
THD @277Vac(%): <10%
Over Temperature Protection: Auto recovery. Current returns to normal after over temperature is removed.

PHYSICAL SPECIFICATIONS

Finish Colour: White
Mounting: Surface, Suspended
Lens Type: Frosted

Finish Type: smooth powder coat over chromate conversion coat
Housing Material: heavy gauge steel
Reflector Material: painted steel

Wiring: Back and End Knock outs with luminaire disconnect
Lens Material: PMMA
Entries: Knockouts, ends and backside

SHIPPING INFORMATION

OrderingCode(s): TLSF810030K-WRV
Carton Quantity: 6


Box Quantity: 1

Box Dimensions (L-W-H): 2355 x 80 x 90 mm

Project:	
Location:	
Model#: TLSF810030K-WRV	Type:
Client:	Qty:
Prepared by:	Date:

LINE DRAWING

Line Drawings

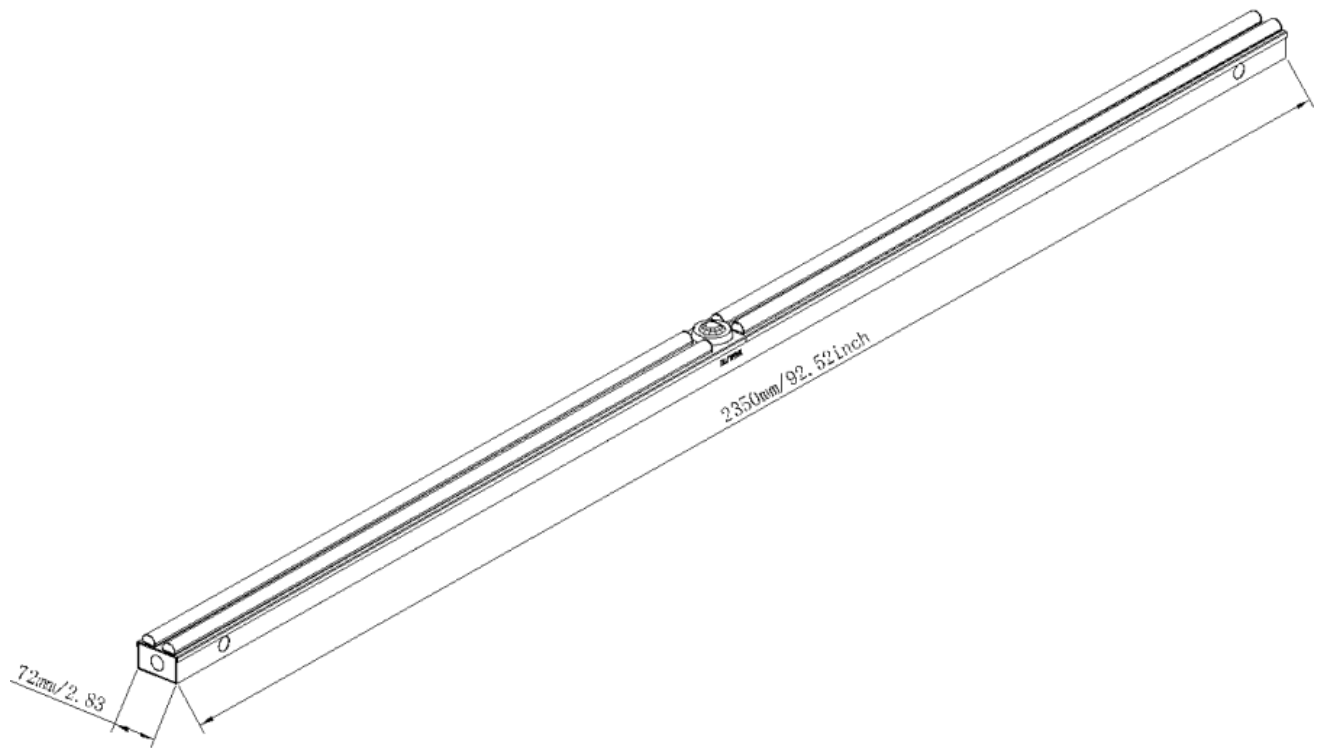

SERIES ARCHITECTURE

Series Architecture

TLSF - - - - -											
Part	Length	Wattage		CCT		Mounting		Voltage		Finish	
TLSF	4 4FT	50	50W	30K	3000K	[Blank]	Surface	WRV	120-347VAC	[Blank]	White
	8 8FT	100	100W	35K	3500K					[Blank]	None
				40K	4000K					EM	Emergency Battery Backup
				50K	5000K						

Optional Extras: Z10-IROC-DIM, EM-HBOS, TLSF4-RFWHX2, TLSF8-COMWG