

Project:		
Location:		
Model#:	TLG453K-WRV-BK	Type:
Client:		Qty:
Prepared by:		Date:

## SERIES SPECIFICATIONS




To supply Tamlite's TLG Series of LED Garage fixture as specified. The luminaire shall operate at 120-347Vac. The housing shall be constructed of Die-Cast Aluminium with a powder coat finish over chromate conversion treatment with clear, acrylic lenses. The luminaire shall be wet location listed. LEDs shall be as specified Nichia ® LED chips. The luminaire shall come prewired with a Z-10 Socket. The luminaire shall be cULus Listed.




## PERFORMANCE SPECIFICATIONS

Luminance Distribution Chart

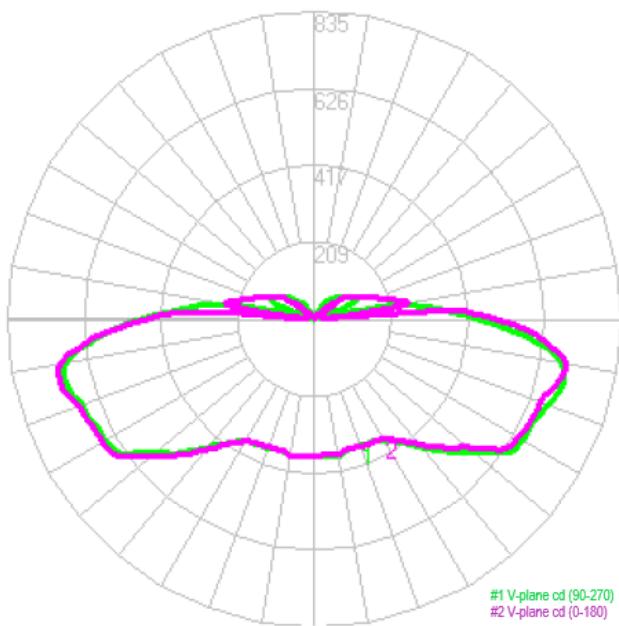

Isolux Diagram

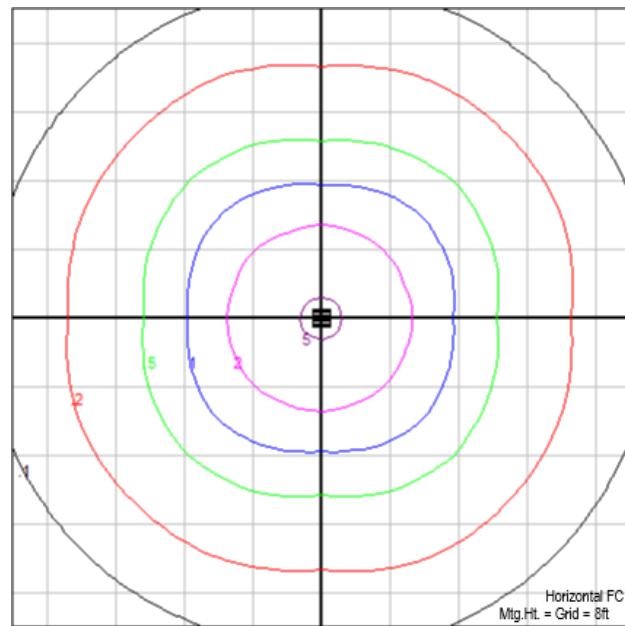

## Zonal Lumen Summary

ZONE	LUMENS	ZONE	LUMENS	ZONE	LUMENS	ZONE	LUMENS	ZONE	LUMENS
0-10	35.38	40-50	380.52	80-90	718.92	120-130	83.99	160-170	0.31
10-20	104.24	50-60	566.29	90-100	351.15	130-140	41.34	170-180	0.01
20-30	171.63	60-70	729.3	100-110	138.4	140-150	16.53	--	--
30-40	251.61	70-80	798.61	110-120	122.75	150-160	4.21	--	--

**Initial Lumen Output:** 4423lm

**Environmental Rating(s):** IP65

**Certification Standards:** UL Safety US-CA

**Limited Product Warranty:** 5 Year(s)

**Efficacy:** 140.9 lm/W

**UL Classification:** Wet Location Listed

**DLC Number:** S-LU61N3


**Luminaire Type:** Surface Mount

**Ambient Operating Temp:** -25C to +40C

**CCN Number:** IFAM7.E359675

## LED SPECIFICATIONS

### SPD

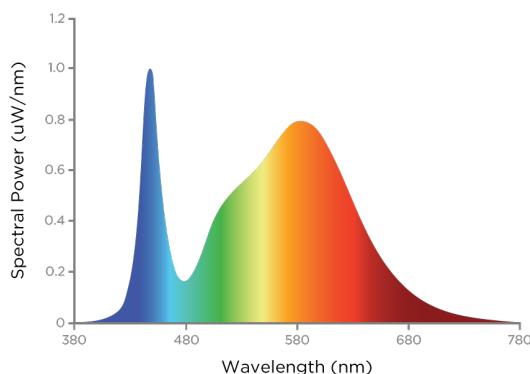

**Source Type:** LED

**L70:** 60000 Hrs

**Manufacturer:** Nichia ®

**Colour Temperature:** 3000K

**CRI:** >75

**Duv:** 0.005

## ELECTRICAL SPECIFICATIONS

**Input Voltage:** 120~347Vac  
**Current Draw@ 120Vac:** 0.2617A  
**Power Factor @120Vac:** >.90  
**THD @347Vac(%):** <20%  
**Short Circuit Protection:** Auto recovery.  
The output shall return to normal when the fault condition is removed.

**Input Frequency:** 50-60Hz  
**Current Draw@347Vac:** 0.0905  
**Power Factor @347Vac:** >.90  
**Dimming:** 0-10Vdc, (0% Min Light Level)  
**Driver Certifications:** c-RU-us Class 2, FCC Part 15 Class B, RoHS

**Fixture Draw:** 31.4W  
**Max On-Delay:** < 1.000S  
**THD @ 120Vac(%):** <20%  
**Over Temperature Protection:** Auto recovery. Current returns to normal after over temperature is removed.

## OCCUPANCY SENSOR INFORMATION

**Sensor Type:** Passive Infrared (PIR) - Outdoor  
**Programing Type:** Remote Infrared

**Control Type:** On-Dim (10%Minimum)

**Input Voltage:** 12VDC

## PHYSICAL SPECIFICATIONS

**Finish Colour:** Black (RAL-9011)  
**Housing Material:** ADC12 Aluminium

**Finish Type:** Textured powder coat over chromate conversion coat  
**Lens Material:** PMMA

**Mounting:** Surface  
**Lens Type:** Clear

## SHIPPING INFORMATION


**OrderingCode(s):** TLG453K-WRV-BK

**Box Quantity:** 1

**Box Dimensions (L-W-H):** 350 x 350 x 180 mm

## LINE DRAWING

### Line Drawings

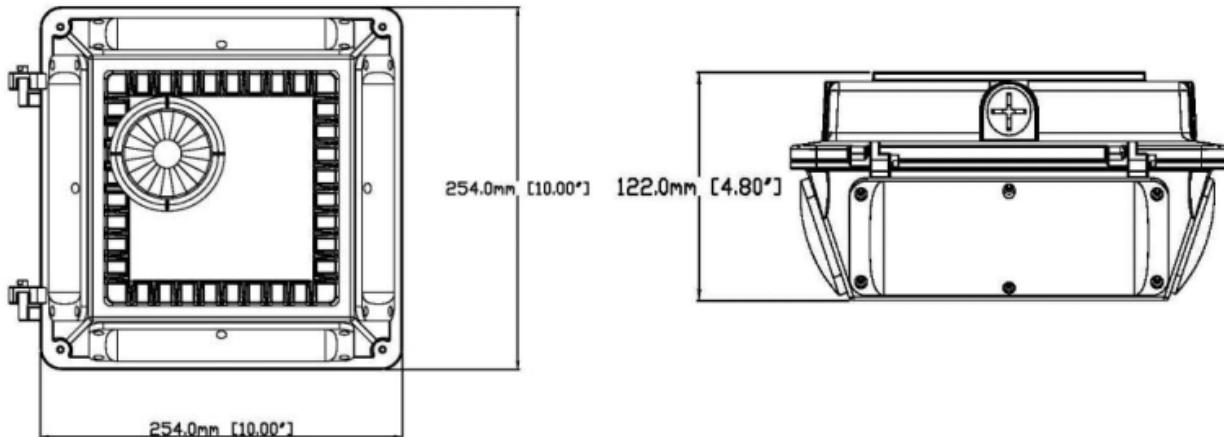

## SERIES ARCHITECTURE

### Series Architecture

TLG	-	45	-	40K	-	WRV	-	WH	-						
Part	Wattage	CCT		Voltage		Finish		Options							
TLG	45 45W	30K	3000K	WRV	120-347VAC	WH	White	Blank	c/w Z10 Socket**						
	85 85W	40K	4000K												
		50K	5000K												
* Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at <a href="http://www.designlights.org/QPL">www.designlights.org/QPL</a> to confirm which versions are.															
** Z10 Socket accepts our Z10 Occupancy sensor. Ordered separately. REMOTE-0100 for programming ordered separately															

Optional Extras: Z10-IROC, Remote-0100