

Project:	
Location:	
Model#: WPX120SW-WRV-BZ	Type:
Client:	Qty:
Prepared by:	Date:

## SERIES SPECIFICATIONS




To supply TamLite WPX series of LED fixtures as specified. The luminaire shall operate at 120-347Vac. The housing shall be constructed of powder-coated ADC12 Aluminium with a hinged bolt-on case for replacement access and a tempered glass lens. A durable formed gasket shall be provided between the enclosure and the lens. The reflector shall be made of highly reflective material and contoured to maximize light output efficiency. All parts shall be corrosion resistant. LEDs shall be as specified, LUMILEDS®2835R Series LED Chips. The LEDs shall be supplied with the luminaire. CCT shall be switch selectable 3000K, 4000K, or 5000K. The luminaire shall be cULus listed and DLC Listed.




## PERFORMANCE SPECIFICATIONS

Luminance Distribution Chart

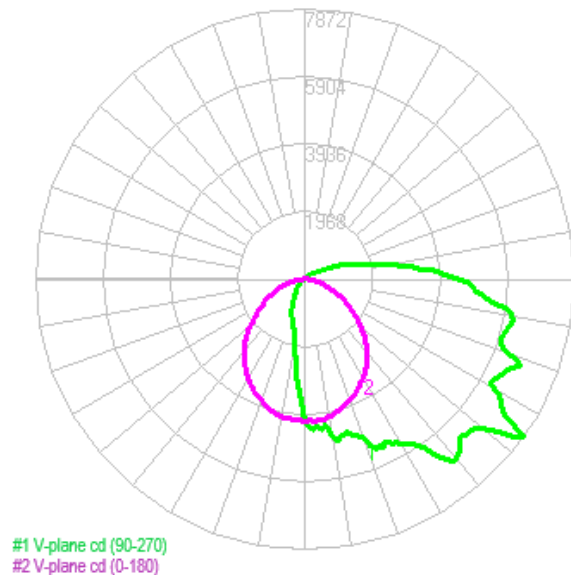

Isolux Diagram

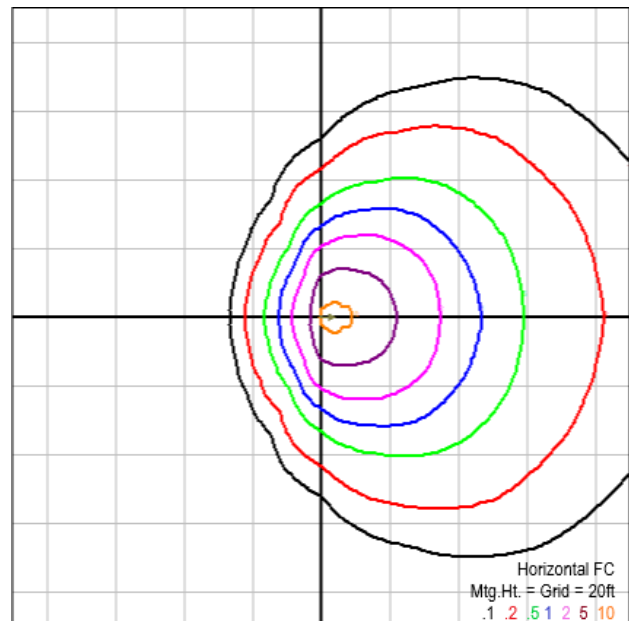



Project:


Location:

Model#: WPX120SW-WRV-BZ

Type:

Client:

Qty:

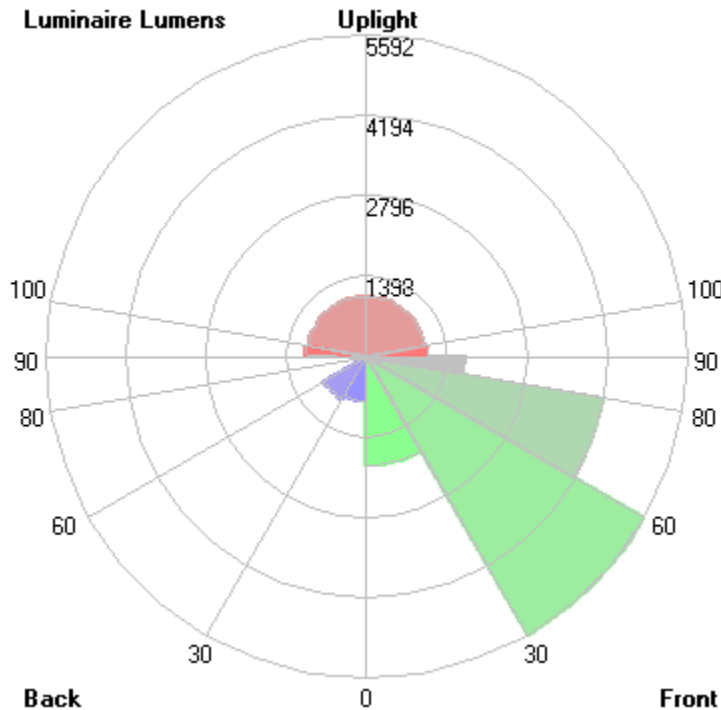

**Lum. Classification System (LCS)**

LCS Zone	Lumens	%Lum
FL (0-30)	1904.1	10.9
FM (30-60)	5592.5	32.2
FH (60-80)	4190.6	24.1
FVH (80-90)	1719.9	9.9
BL (0-30)	785.9	4.5
BM (30-60)	850.0	4.9
BH (60-80)	212.1	1.2
BVH (80-90)	37.5	0.2
UL (90-100)	1063.0	6.1
UH (100-180)	1038.2	6.0
Total	17393.8	100.0
BUG Rating	B2-U5-G5	

Initial Lumen Output: 17809lm

Luminaire Type: Wall Pack Non-Cut-off

Ambient Operating Temp: -40C to +55C

Limited Product Warranty: 5 Year(s)

Efficacy: 144.35lm/W

Environmental Rating(s): IP65

Certification Standards: UL Safety US-  
CA , DLC Premium

Max Candela: 7697.3cd


UL Classification: Wet Location Listed

DLC Number: PLGPI825R2UN


Project:	
Location:	
Model#: WPX120SW-WRV-BZ	Type:
Client:	Qty:
Prepared by:	Date:

## LED SPECIFICATIONS

### SPD

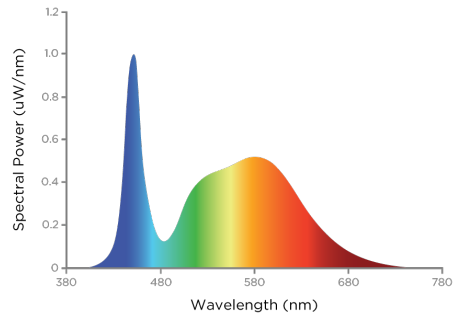

### TM-30

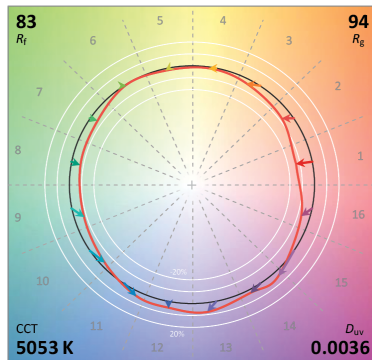

**Source Type:** LED  
**CRI:** > 80  
**L70:** >54000 Hrs.  
**Chromaticity:**  $x=0.344$   $y=0.3582$

**Manufacturer:** LUMILEDS®  
**Rf:** 83  
**L90:** >51,000 hrs.  
**Duv:** 0.0036

**Part Number:** L128 Series  
**Rg:** 94  
**Colour Temperature:** 5000K



Project:	
Location:	
Model#: WPX120SW-WRV-BZ	Type:
Client:	Qty:
Prepared by:	Date:

#### ELECTRICAL SPECIFICATIONS

**Driver Manufacturer:** Weled Power ®  
**Input Frequency:** 50-60Hz  
**Current Draw@347Vac:** 0.3808  
**Power Factor @120Vac:** >.98  
**THD @347Vac(%):** <15%  
**Surge Suppression:** L-N:4KV, L&N-PE:6KV  
**Short Circuit Protection:** Auto Recovery.  
The output shall return to normal when the fault condition is removed.

**Driver Part Number:** WP-CHA-1 20B  
**Fixture Draw:** 123.38W  
**Inrush Current:** <80A  
**Power Factor @347Vac:** >.90  
**Driver MTBF:** 200,000hrs  
**Dimming:** 0-10Vdc, (0% Min Light Level)  
**Driver Certifications:** UL8750/CAN/CSA C22.2 NO. 250.13, FCC Part 15 Class B, RoHS

**Input Voltage:** 120~347Vac  
**Current Draw@ 120Vac:** 1.0292  
**Max On-Delay:** < 0.5 S  
**THD @ 120Vac(%):** <10%  
**Max Operating Case Temperature:** 85C  
**Over Temperature Protection:** Auto Recovery, The fixture shall shut down and return to operation when the temperature returns to normal.

#### PHYSICAL SPECIFICATIONS

**Finish Colour:** Bronze (RAL-8019)  
**Mounting:** Wall Mount  
**Lens Type:** Clear - Prismatic

**Finish Type:** Textured powder coat over chromate conversion coat  
**Housing Material:** ADC12 Aluminium  
**Reflector Material:** Integral White

**Wiring:** Internal connections  
**Lens Material:** Glass  
**Entries:** (3) ½" inch threaded knockouts

#### SHIPPING INFORMATION

**OrderingCode(s):** WPX120SW-WRV-BZ  
**Box Weight:** 5.24 kg


**Box Quantity:** 1

**Box Dimensions (L-W-H):** 397 x 297 x 250 mm

Project:	
Location:	
Model#: WPX120SW-WRV-BZ	Type:
Client:	Qty:
Prepared by:	Date:

## LINE DRAWING

### Line Drawings

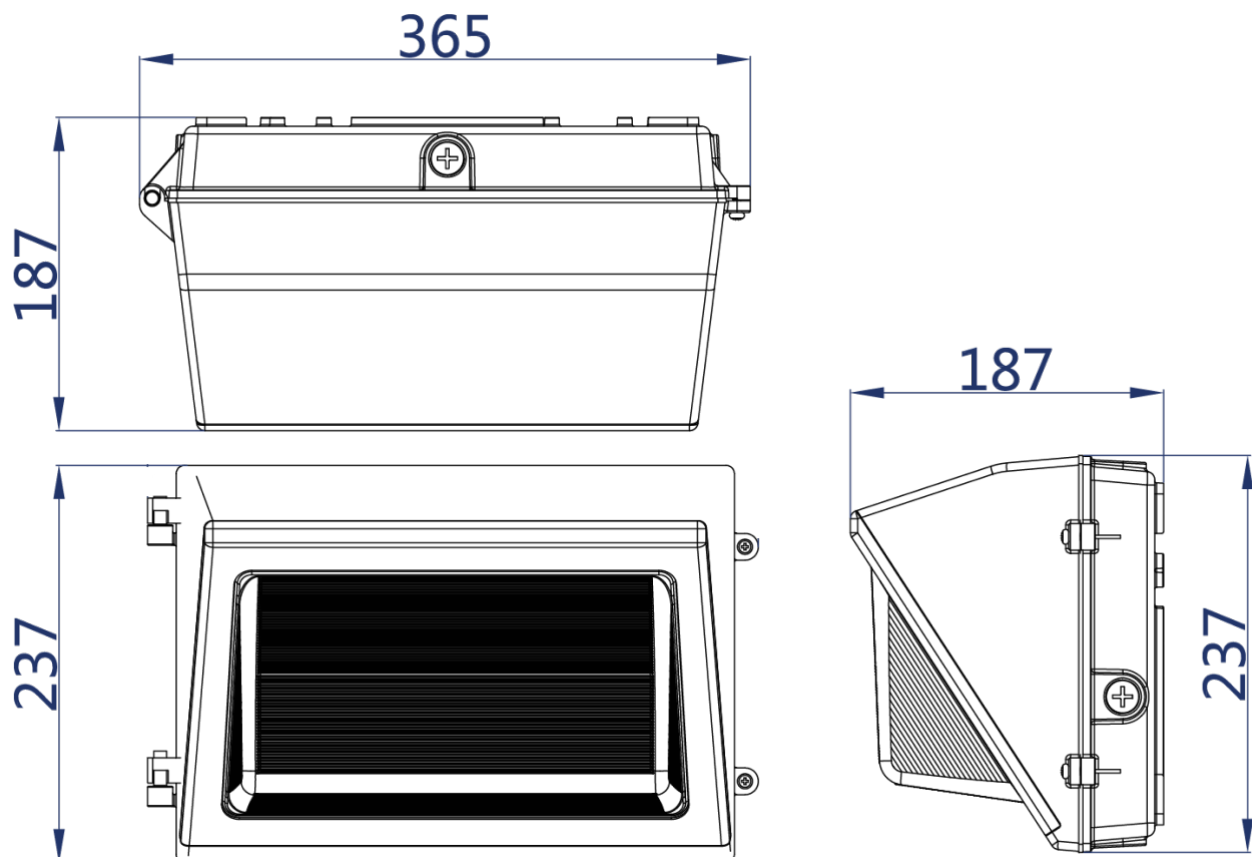



Project:	
Location:	
Model#: WPX120SW-WRV-BZ	Type:
Client:	Qty:
Prepared by:	Date:

SERIES ARCHITECTURE

WPX - - - -								
Part	Wattage		CCT		Voltage		Finish	
WPX	40	40W	SW	Selectable White	WRV	120-347VAC	BZ	Bronze
	80	80W		3000K, 4000K, 5000K				
	120	120W						

Optional Extras: WPFLED-PC-120