

Project:	
Location:	
Model#: MPF1503KY-UNV-BZ	Туре:
Client:	Qty:
Prepared by:	Date:

SERIES SPECIFICATIONS



To supply Tamlite's MPF Series of Mini floodlight as specified. The luminaire shall operate at 120-277Vac and use a constant current type driver. The housing shall be constructed of powder-coated die-cast Aluminium with a screw down rear wiring compartment with pre-fitted IP68 stainless steel strain relief, and an impact resistant polycarbonate optic. A durable formed gasket shall be provided between the enclosure and the lens, and the wiring compartment and housing. All parts shall be corrosion resistant. LEDs shall be as specified, LUXEON® 3030 2D LED chips. The luminaire shall be cULus Listed and DLC Listed.











PERFORMANCE SPECIFICATIONS

Luminance Distribution Chart




Isolux Diagram





Project:	
Location:	
Model#: MPF1503KY-UNV-BZ	Туре:
Client:	Qty:
Prepared by:	Date:

BUG Graph

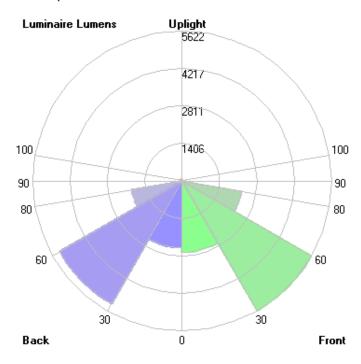

Lum. Classification System (LCS)

	_			
LCS.	Zone	Lumens	%Lamp	%Lum
FL	(0-30)	2680.4	N.A.	13.0
FM	(30-60)	5622.4	N.A.	27.3
FΗ	(60-80)	2277.2	N.A.	11.1
FVH	(80-90)	114.8	N.A.	0.6
BL	(0-30)	2509.9	N.A.	12.2
ВМ	(30-60)	5309.0	N.A.	25.8
ВН	(60-80)	1928.9	N.A.	9.4
BVH	(80-90)	104.5	N.A.	0.5
UL	(90-100)	3.0	N.A.	0.0
UH	(100-180)	46.2	N.A.	0.2
Total		20596.3	N.A.	100.0
BUG	Rating	B4-U2-G3		

Initial Lumen Output: 20500lm NEMA Type: 7H x 7V

BUG Rating: B4-U2-G3

Ambient Operating Temp: -40C to +40C

CCN Number: IFAM7.E359675

Efficacy: 137lm/W Beam Angle: 128H / 92V Environmental Rating(s): IP65

Certification Standards: UL Safety US-

CA, DLC

Limited Product Warranty: 5 Year(s)

CBCP: 6895cd

Luminaire Type: Direct - Type II Very Short UL Classification: Wet Location Listed

DLC Number: PG1LRA4C



Project:	
Location:	
Model#: MPF1503KY-UNV-BZ	Туре:
Client:	Qty:
Prepared by:	Date:


LED SPECIFICATIONS

R Tables

R1	80
R2	88
R3	93
R4	81
R5	81
R6	83
R7	87
R8	66

R9	5
R10	71
R11	80
R12	58
R13	83
R14	96
R15	75

SPD



Source Type: LED

CRI: > 80

Chromaticity: x=0.34718 y=0.35326

Manufacturer: Lumileds®

L70: 54000 Hrs **Duv:** 0.005

Part Number: LUXEON 3030 2D Colour Temperature: 3000K

ELECTRICAL SPECIFICATIONS

Driver Manufacturer: TOWIN® **Input Frequency:** 50-60Hz **Auxiliary Control:**

Auxiliary Control:

THD @ 120Vac(%): <10%

Max Operating Case Temperature: 85C Short Circuit Protection: Auto Recovery.

The output shall return to normal after the

fault condition is removed.

Driver Part Number: DF120W-40C2450B

Fixture Draw: 152.9W
Power Factor @120Vac: >.90

THD @277Vac(%): <10%

Dimming: Not Suitable for Dimming **Driver Certifications:** c-RU-us Class 2,

FCC Part 15 Class B, RoHS

Input Voltage: 120~277Vac Max On-Delay: < 1 S

Power Factor @277Vac: >.90 Driver MTBF: 50,000hrs

Over Temperature Protection: Decreases output current, returning to normal after

over temperature is removed.

PHYSICAL SPECIFICATIONS

Finish Colour: Bronze (RAL-8019)
Housing Material: ADC12 Aluminium
Entries: Stainless Steel Strain Relief

Wiring: 6' 18-3 SJTW Cord Whip

Lens Material: PMMA

Mounting: Yoke Mount Lens Type: Clear Optics



Project:	
Location:	
Model#: MPF1503KY-UNV-BZ	Туре:
Client:	Qty:
Prepared by:	Date:


SHIPPING INFORMATION

OrderingCode(s): MPF1005KY-UNV-BZ


Box Quantity: 1

LINE DRAWING

Line Drawings









Project:	
Location:	
Model#: MPF1503KY-UNV-BZ	Туре:
Client:	Qty:
Prepared by:	Date:


SERIES ARCHITECTURE

Series Architecture

MPF -

Part	Wa	ttage	CC.	Т	М	ounting	Vol	tage	Fir	nish
MPF	12	12W	30K	3000K	Y	Yoke Mount	UNV	120-277VAC	BZ	Bronze
	30	30W	40K	4000K	K	1/2" Threaded Knuckle	UN4	347VAC	BK	Black
	50	50W	50K	5000K	S	Slip Fitter (2-3/8" O.D.)			WH	White
	80	80W							CC	Custom Colour
	100	100W								
	150	150W								

	Wattage							
	150W	100W	80W	50W				
Lumens	20,500 lm	13,660 lm	10,930 lm	6,830 lm				



^{*}DIP Switch is white. Keep cover on for waterproof.