

Project:					
Location:					
Model#: PET-C10-WH	Туре:				
Client:	Qty:				
Prepared by:	Date:				

SERIES SPECIFICATIONS



To supply Tamlite's PET-C10 power cord. Cord shall be complete with luminaire disconnect. Additionally, it shall be suitable for 0-10Vdc control signal.











ELECTRICAL SPECIFICATIONS

Dimming: 0-10Vdc, (0% Min Light Level)

PHYSICAL SPECIFICATIONS

Finish Colour: White Wiring: Internal, L, N, G and 0-10Vdc wires

SHIPPING INFORMATION

OrderingCode(s): PET-C10


Box Quantity: 1



Project:					
Location:					
Model#: PET-C10-WH	Туре:				
Client:	Qty:				
Prepared by:	Date:				

LINE DRAWING

Line Drawings

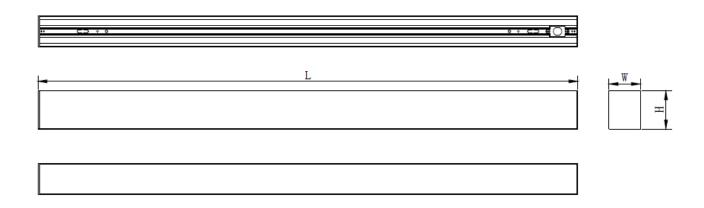



Project:					
Location:					
Model#: PET-C10-WH	Туре:				
Client:	Qty:				
Prepared by:	Date:				

SERIES ARCHITECTURE

Series Architecture

PEI -	·											
Series	Leng	gth	Wattage		CCT Optics		Wattage		Finish			
PET	2 2F	-T	20	20W	SW	Selectable White*	D	Direct	WRV	120-347 VAC	WH	White
	3 3F	-T	30	30W	30K		DI	Direct-Indirect			BK	Black
	4 4F	-T	40	40W	35K		A1	Asymetric			CC	Custom
	6 6F	-T	60	60W	40K							
	8 8	-T	80	80W	50K							

^{*} Selectable White; 3000K, 3500K, 4000K or 5000K

Optional Accessories (Ordered Seperately)

PET

10ft Power Cord, 5 conductor White
120degree Selectable White Joiner
L-Shaped Selectable White Joiner
L-Shaped Selectable White Interior Joiner
L-Shaped Selectable White exterior Joiner
T-Shaped Selectable White Joiner
X-Shaped Selectable White Joiner
4ft Louver assembly
4ft Plaster Mud Mounting Kit
4ft Reccessed Mounting Kit
Suspension Kit, 6ft long
T-Bar Mounting Kit
Wall Mounting Kit