



Project:	
Location:	
Model#: PET-C10-WH	Type:
Client:	Qty:
Prepared by:	Date:

SERIES SPECIFICATIONS



To supply Tamlite's PET-C10 power cord. Cord shall be complete with luminaire disconnect. Additionally, it shall be suitable for 0-10Vdc control signal.



ELECTRICAL SPECIFICATIONS

Dimming: 0-10Vdc, (0% Min Light Level)

PHYSICAL SPECIFICATIONS

Finish Colour: White

Wiring: Internal, L, N, G and 0-10Vdc wires

SHIPPING INFORMATION

OrderingCode(s): PET-C10




Box Quantity: 1



Project:	
Location:	
Model#: PET-C10-WH	Type:
Client:	Qty:
Prepared by:	Date:

LINE DRAWING

Line Drawings

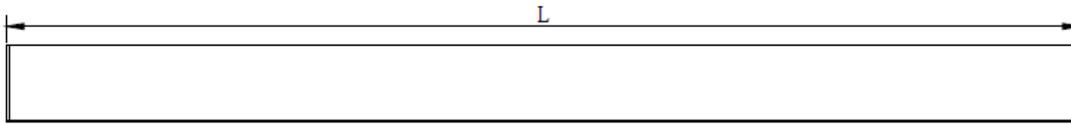



Project:	
Location:	
Model#: PET-C10-WH	Type:
Client:	Qty:
Prepared by:	Date:

SERIES ARCHITECTURE

Series Architecture

PET - - - - -

Series	Length	Wattage		CCT		Optics		Wattage		Finish	
PET	2 2FT	20	20W	SW	Selectable White*		D	Direct	WRV	120-347 VAC	WH White
	3 3FT	30	30W	30K			DI	Direct-Indirect			BK Black
	4 4FT	40	40W	35K			A1	Asymetric			CC Custom
	6 6FT	60	60W	40K							
	8 8FT	80	80W	50K							

* Selectable White; 3000K, 3500K, 4000K or 5000K

Optional Accessories (Ordered Separately)

PET -

C10	10ft Power Cord, 5 conductor White
J120-SWD-WH	120degree Selectable White Joiner
JL-SWD-WH	L-Shaped Selectable White Joiner
JL-IN-SWD-WH	L-Shaped Selectable White Interior Joiner
JL-OUT-SWD-WH	L-Shaped Selectable White exterior Joiner
JT-SWD-WH	T-Shaped Selectable White Joiner
JX-SWD-WH	X-Shaped Selectable White Joiner
LL4	4ft Louver assembly
MUDKIT4	4ft Plaster Mud Mounting Kit
RECKIT4	4ft Recessed Mounting Kit
SUSKIT6	Suspension Kit, 6ft long
TBARKIT	T-Bar Mounting Kit
WMKIT	Wall Mounting Kit