



|                    |       |
|--------------------|-------|
| Project:           |       |
| Location:          |       |
| Model#: PET-C10-WH | Type: |
| Client:            | Qty:  |
| Prepared by:       | Date: |

#### SERIES SPECIFICATIONS



To supply Tamlite's PET-C10 power cord. Cord shall be complete with luminaire disconnect. Additionally, it shall be suitable for 0-10Vdc control signal.



#### ELECTRICAL SPECIFICATIONS

**Dimming:** 0-10Vdc, (0% Min Light Level)

#### PHYSICAL SPECIFICATIONS

**Finish Colour:** White

**Wiring:** Internal, L, N, G and 0-10Vdc wires

#### SHIPPING INFORMATION




**OrderingCode(s):** PET-C10

**Box Quantity:** 1

|                    |       |
|--------------------|-------|
| Project:           |       |
| Location:          |       |
| Model#: PET-C10-WH | Type: |
| Client:            | Qty:  |
| Prepared by:       | Date: |

## LINE DRAWING

### Line Drawings

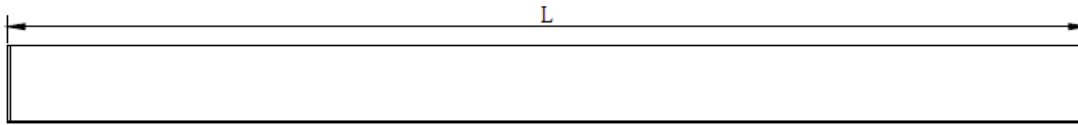



|                    |       |
|--------------------|-------|
| Project:           |       |
| Location:          |       |
| Model#: PET-C10-WH | Type: |
| Client:            | Qty:  |
| Prepared by:       | Date: |

## SERIES ARCHITECTURE

### Series Architecture

| PET - - - - - |        |         |     |     |                   |        |                 |         |             |        |        |
|---------------|--------|---------|-----|-----|-------------------|--------|-----------------|---------|-------------|--------|--------|
| Series        | Length | Wattage |     | CCT |                   | Optics |                 | Wattage |             | Finish |        |
| PET           | 2 2FT  | 20      | 20W | SW  | Selectable White* | D      | Direct          | WRV     | 120-347 VAC | WH     | White  |
|               | 3 3FT  | 30      | 30W | 30K |                   | DI     | Direct-Indirect |         |             | BK     | Black  |
|               | 4 4FT  | 40      | 40W | 35K |                   | A1     | Asymetric       |         |             | CC     | Custom |
|               | 6 6FT  | 60      | 60W | 40K |                   |        |                 |         |             |        |        |
|               | 8 8FT  | 80      | 80W | 50K |                   |        |                 |         |             |        |        |

\* Selectable White; 3000K, 3500K, 4000K or 5000K

### Optional Accessories (Ordered Separately)

| PET -         |   |
|---------------|---|
| C10           | 10ft Power Cord, 5 conductor White        |
| J120-SWD-WH   | 120degree Selectable White Joiner         |
| JL-SWD-WH     | L-Shaped Selectable White Joiner          |
| JL-IN-SWD-WH  | L-Shaped Selectable White Interior Joiner |
| JL-OUT-SWD-WH | L-Shaped Selectable White exterior Joiner |
| JT-SWD-WH     | T-Shaped Selectable White Joiner          |
| JX-SWD-WH     | X-Shaped Selectable White Joiner          |
| LL4           | 4ft Louver assembly                       |
| MUDKIT4       | 4ft Plaster Mud Mounting Kit              |
| RECKIT4       | 4ft Recessed Mounting Kit                 |
| SUSKIT6       | Suspension Kit, 6ft long                  |
| TBARKIT       | T-Bar Mounting Kit                        |
| WMKIT         | Wall Mounting Kit                         |