

Project:								
Location:								
Model#: ARPS353K3RT2H-UN4-BK	Туре:							
Client:	Qty:							
Prepared by:	Date:							

SERIES SPECIFICATIONS



To supply Tamlite ARPS Series of LED fixtures as specified. The luminaire shall operate at 347Vac and use a 1-10Vdc, (10% Min Light Level) dimmable, constant current type Inventronics® driver. The housing shall be constructed of ADC12 aluminium with a Textured powder coat over chromate conversion coat. All hardware to be stainless steel. Bottom access wiring compartment to be hinged and sealed with a durable foamed gasket. Fixtures to come standard with a NEMA7 style twist lock socket and shorting cap.Optics to be constructed of PMMA be sealed via captive gasket and complete with a clear optics LED's shall be as specified Nichia® NVSW219 with a 3 SDCM colour tolerance. Fixture shall be UL Safety US-CA listed.

















PERFORMANCE SPECIFICATIONS

Luminance Distribution Chart




Isolux Diagram





Project:								
Location:								
Model#: ARPS353K3RT2H-UN4-BK	Туре:							
Client:	Qty:							
Prepared by:	Date:							

BUG Graph

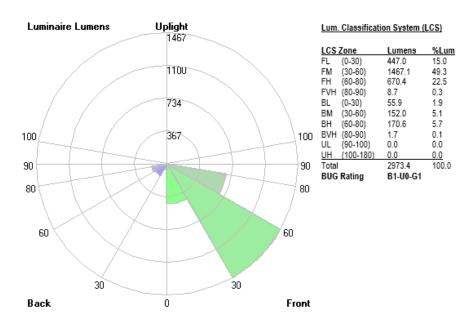

Initial Lumen Output: 2973lm BUG Rating: B1-U0-G1

Ambient Operating Temp: -40C to +40C Limited Product Warranty: 10 Year(s)

Efficacy: 84lm/W

Environmental Rating(s): IP66
Certification Standards: UL Safety US-

CA

Luminaire Type: Type II-H - Medium **UL Classification:** Wet Location Listed

CCN Number: IFAM7.E359675



Project:	
Location:	
Model#: ARPS353K3RT2H-UN4-BK	Туре:
Client:	Qty:
Prepared by:	Date:


LED SPECIFICATIONS

R Tables

R1	73					
R2	77 80 76 74					
R3						
R4						
R5						
R6	70					
R7	80					
R8	61					

R9	0						
R10	46						
R11	76						
R12	50 73 89						
R13							
R14							
R15	67						

SPD

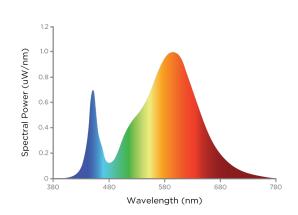

Source Type: LED

CRI: >70

Chromaticity: x=0.4338 y=0.4030

Manufacturer: Nichia® L70: 60000 Hrs.

Colour Tolerance: 3 SDCM

Part Number: NVSW219
Colour Temperature: 3000K

Duv: 0.006

ELECTRICAL SPECIFICATIONS

Driver Manufacturer: Inventronics®
Input Frequency: 50/60 hz
Inrush Current: 0.32 A2S
Power Factor at 347Vac: > 0.90
Max Operating Case Temperature: 90C
Dimming Current mA: 0.25 mA

Driver Certifications: c-RU-us Class 2,

FCC Part 15 Class B, RoHS

Driver Part Number: LTC-040SxxxDSP

Fixture Draw: 35W
Max On-Delay: < 1 S
THD at 347Vac(%): < 10%
Surge Suppression: 10kV

Over Temperature Protection: Auto recovery. Current returns to normal after

over temperature is removed.

Input Voltage: 347Vac

Current Draw at 347Vac: 0.1009 Auxiliary Control: 12 Vdc Driver MTBF: 459,000 hrs

Dimming: 1-10Vdc, (10% Min Light Level) **Short Circuit Protection:** Auto recovery. The output shall return to normal when the

fault condition is removed.

PHYSICAL SPECIFICATIONS

Finish Colour: Black (RAL-9011)
Mounting:: 3" round pole
Lens Type: clear optics
Entries: gasketed wire entry

Finish Type: Textured powder coat over

chromate conversion coat

Housing Material: ADC12 aluminium

Weight: 4.7 kg

Wiring: internal junction Lens Material: PMMA EPA: 1.39 sqft



Project:							
Location:							
Model#: ARPS353K3RT2H-UN4-BK	Туре:						
Client:	Qty:						
Prepared by:	Date:						

SHIPPING INFORMATION


OrderingCode(s): ARPS353KT2H-UN4-BK, AR-PSSQ-BK, AR-PS3R5R-BK


Box Weight: 4.7 kg **Box Quantity:** 1 **Box Dimensions (L-W-H):** 495 x 340 x

180 mm

LINE DRAWING

Line Drawings

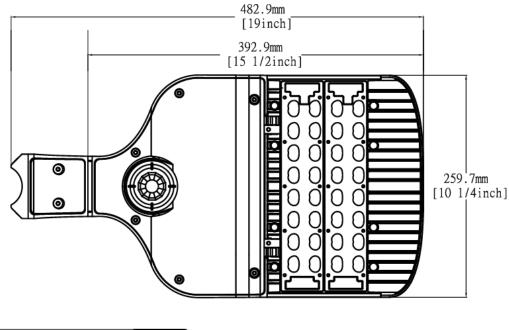

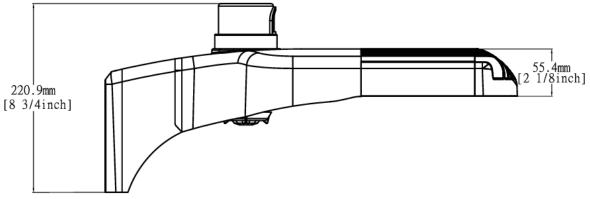



Project:								
Location:								
Model#: ARPS353K3RT2H-UN4-BK	Туре:							
Client:	Qty:							
Prepared by:	Date:							

SERIES ARCHITECTURE

Series Architecture

ARPS -														
Part	Watt	age	сст		Mounting		Optics		Voltage		Finish		Accessories	
ARPS	35	35W	30K	3000K	SQ	SQ Pole Mount	T2	Type II	UNV	120-277VAC	BZ	Bronze	[blank]	None
	75	75W	40K	4000K	3R	3" RD Pole	T2H	with House Side Shield	UN4	347VAC	BK	Black	0	Occupancy Sensor
	140	140W	50K	5000K	4R	4" RD Pole	T3	Type III	WRV	120-347VAC	WH	White	AR-N3PC-UNV	120VAC Photo control
	185	185W	AM	Amber	5R	5" RD Pole	ТЗН	with House Side Shield			CC	Custom	AR-N3PC-UN4	347VAC Photo control
					SF	Slip Fitter	T4	Type IV					AR-SPIKE	Bird Spike
							T4H	with House Side Shield					FSIR-100	Programming remote, sold seperately
							T5	Type V						
							T5H	with House Side Shield						

Optional Extras: AR-SPIKE AR-N3PC-UNV