

Project:									
Location:									
Model#: ARPS1403K3RT2H-UN4-BZ	Туре:								
Client:	Qty:								
Prepared by:	Date:								

#### **SERIES SPECIFICATIONS**



To supply Tamlite ARPS Series of LED fixtures as specified. The luminaire shall operate at 347Vac and use a 1-10Vdc, (10% Min Light Level) dimmable, constant current type Inventronics® driver. The housing shall be constructed of ADC12 aluminium with a Textured powder coat over chromate conversion coat. All hardware to be stainless steel. Bottom access wiring compartment to be hinged and sealed with a durable foamed gasket. Fixtures to come standard with a NEMA7 style twist lock socket and shorting cap. Optics to be constructed of PMMA be sealed via captive gasket and complete with a clear optics LED's shall be as specified Nichia® NVSW219 with a 3 SDCM colour tolerance. Fixture shall be UL Safety US-CA listed.

















# PERFORMANCE SPECIFICATIONS

#### **Luminance Distribution Chart**




#### **Isolux Diagram**





Project:									
Location:									
Model#: ARPS1403K3RT2H-UN4-BZ	Туре:								
Client:	Qty:								
Prepared by:	Date:								

# **BUG Graph**

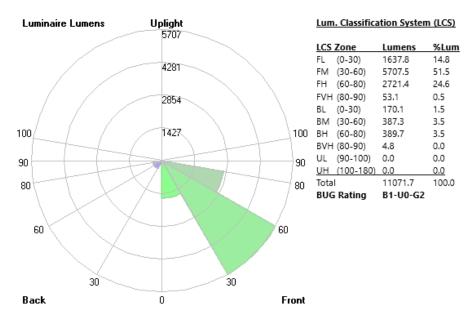

Initial Lumen Output: 11070lm Luminaire Type: Type II-H - Medium **UL Classification:** Wet Location Listed

CCN Number: IFAM7.E359675

Efficacy: 81lm/W BUG Rating: B1-U0-G2

Ambient Operating Temp: -40C to +40C Limited Product Warranty: 10 Year(s)

Max Candela: 9385cd (80 h, 71.5V) Environmental Rating(s): IP66

Certification Standards: UL Safety US-

CA



Project:									
Location:									
Model#: ARPS1403K3RT2H-UN4-BZ	Туре:								
Client:	Qty:								
Prepared by:	Date:								


#### LED SPECIFICATIONS

#### **R Tables**

R1	73					
R2	77					
R3	80					
R4	76					
R5	74					
R6	70					
R7	80					
R8	61					

R9	0
R10	46
R11	76
R12	50
R13	73
R14	89
R15	67

### SPD

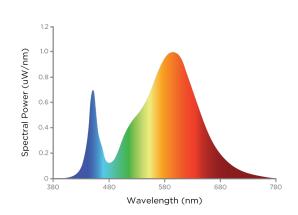

Source Type: LED

**CRI:** >70

**Chromaticity:** x=0.4338 y=0.4030

Manufacturer: Nichia® L70: 60000 Hrs.

Colour Tolerance: 3 SDCM

Part Number: NVSW219
Colour Temperature: 3000K

**Duv:** 0.006

# **ELECTRICAL SPECIFICATIONS**

Driver Manufacturer: Inventronics®
Input Frequency: 50/60 hz
Inrush Current: 7.6 A2S
Power Factor at 347Vac: > 0.90
Max Operating Case Temperature: 90C

**Dimming Current mA:** .25 mA **Driver Certifications:** c-RU-us Class 2,

FCC Part 15 Class B, RoHS

Driver Part Number: ESD-150SxxxDT

Fixture Draw: 141.2W
Max On-Delay: < 0.75 S
THD at 347Vac(%): < 10%
Surge Suppression: 10kV

Over Temperature Protection: Auto recovery. Current returns to normal after

over temperature is removed.

Input Voltage: 347Vac Current Draw at 347Vac: 0.41 Auxiliary Control: 12 Vdc Driver MTBF: 203,000 hrs

**Dimming:** 1-10Vdc, (10% Min Light Level) **Short Circuit Protection:** Auto recovery. The output shall return to normal when the

fault condition is removed.

#### PHYSICAL SPECIFICATIONS

Finish Colour: Bronze (RAL-8019)
Mounting:: 3" round pole
Lens Type: clear optics
Entries: gasketed wire entry

Finish Type: Textured powder coat over

chromate conversion coat

Housing Material: ADC12 aluminium

Weight: 7.5 kg

Wiring: internal junction Lens Material: PMMA EPA: 0.1560771072



Project:								
Location:								
Model#: ARPS1403K3RT2H-UN4-BZ	Туре:							
Client:	Qty:							
Prepared by:	Date:							

# SHIPPING INFORMATION


OrderingCode(s): ARPS1403KT2H-UN4-BZ, AR-PSSQ, AR-PS3R

**Box Weight:** 7.5 kg **Box Quantity:** 1 **Box Dimensions (L-W-H):** 595 x 340 x

180 mm

# LINE DRAWING

# **Line Drawings**

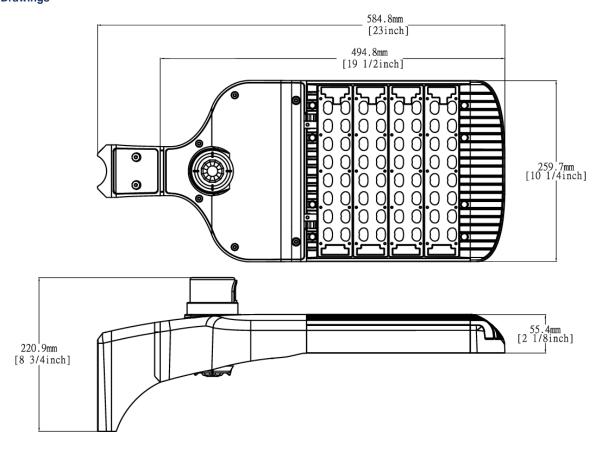



Project:									
Location:									
Model#: ARPS1403K3RT2H-UN4-BZ	Туре:								
Client:	Qty:								
Prepared by:	Date:								

# SERIES ARCHITECTURE

# **Series Architecture**

ARPS					_									
Part	Wattage CCT			Mounting		Optics		Voltage		Finish		Accessories		
ARPS	35	35W	30K	3000K	SQ	SQ Pole Mount	T2	Type II	UNV	120-277VAC	BZ	Bronze	[blank]	None
	75	75W	40K	4000K	3R	3" RD Pole	T2H	with House Side Shield	UN4	347VAC	BK	Black	0	Occupancy Sensor
	140	140W	50K	5000K	4R	4" RD Pole	T3	Type III	WRV	120-347VAC	WH	White	AR-N3PC-UNV	120VAC Photo control
	185	185W	AM	Amber	5R	5" RD Pole	ТЗН	with House Side Shield			CC	Custom	AR-N3PC-UN4	347VAC Photo control
					SF	Slip Fitter	T4	Type IV					AR-SPIKE	Bird Spike
							T4H	with House Side Shield					FSIR-100	Programming remote, sold seperately
							T5	Type V						
							T5H	with House Side Shield						

Optional Extras: AR-SPIKE, AR-N3PC-UN4