



Project:	
Location:	
Model#: MWP15SW-120-BZ-PC	Type:
Client:	Qty:
Prepared by:	Date:

**SERIES SPECIFICATIONS**




To supply TamLite MWP15 series of LED fixtures as specified. The body shall be polycarbonate and mount to an aluminum back plate. The LEDs shall be Selectable in CCT. The luminaire shall be cULus listed and DLC qualified



**PERFORMANCE SPECIFICATIONS**


**Luminance Distribution Chart**

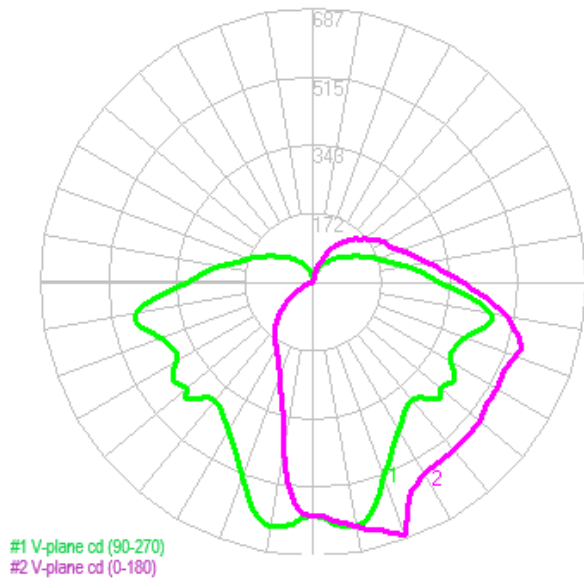

**Initial Lumen Output:** 2129lm  
**UL Classification:** Wet Location Listed  
**DLC Number:** PLHH3S66Z411

**Efficacy:** 137.2lm/w  
**Ambient Operating Temp:** -20C to +40C  
**CCN Number:** IFAM7.E359675

**Isolux Diagram**

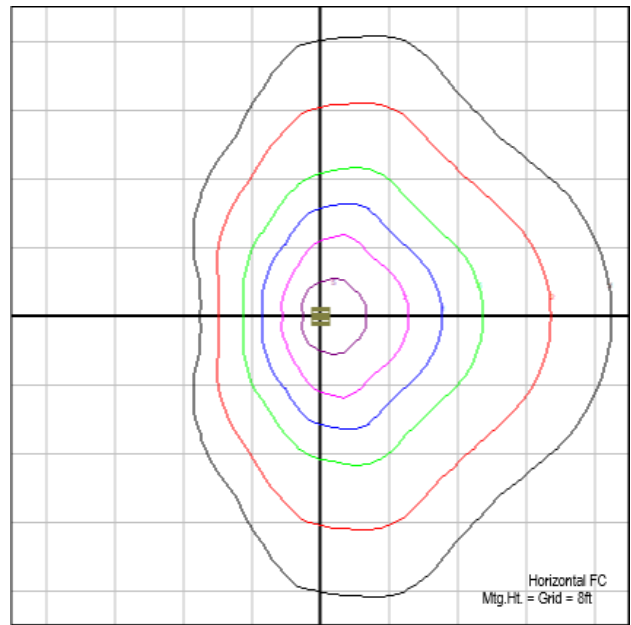


**Max Candela:** 686cd  
**Certification Standards:** UL Safety US-CA , DLC  
**Limited Product Warranty:** 5 Year(s)


Project:	
Location:	
Model#: MWP15SW-120-BZ-PC	Type:
Client:	Qty:
Prepared by:	Date:

## LED SPECIFICATIONS

### SPD

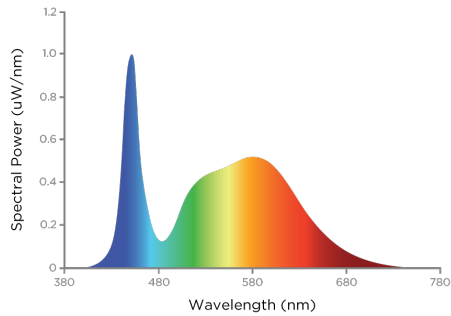

### TM-30

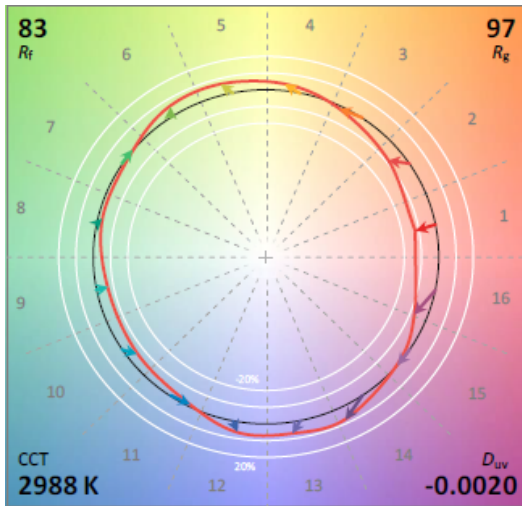

**Source Type:** LED

**CRI:** >80

**L90:** 50,000 Hrs

**Duv:** -0.002

**Manufacturer:** Lumileds

**Rf:** 83

**Colour Temperature:** 3000K, 4000K,

5000K Field Selectable

**Part Number:** L128 3080RA35003H1

**Rg:** 97

**Chromaticity:** x=0.3462 y=0.3583

Project:	
Location:	
Model#: MWP15SW-120-BZ-PC	Type:
Client:	Qty:
Prepared by:	Date:

**ELECTRICAL SPECIFICATIONS**

**Driver Part Number:** HB-LPG015G-52  
**Fixture Draw:** 15.52  
**Dimming:** 0-10Vdc, (0% Min Light Level)

**Input Voltage:** 120Vac  
**Current Draw @ 120Vac:** 0.1250A

**Input Frequency:** 50-60Hz  
**Power Factor @ 120Vac:** >.90

**PHYSICAL SPECIFICATIONS**

**Housing Material:** Aluminium Back Plate

**Lens Material:** Prismatic Polycarbonate

**SHIPPING INFORMATION**

**OrderingCode(s):** MWP155K-120-BZ-PC  
**Box Weight:** 1.05kg  
**Carton Weight:** 11.4kg

**Box Quantity:** 1  
**Carton Quantity:** 10

**Box Dimensions (L-W-H):** 154 x 88 x 225mm  
**Carton Dimensions (I-W-H):** 460x325x245mm

**LINE DRAWING**

**Line Drawings**

