

Project:		
Location:		
Model#:	MWP15SW-120-BZ-PC	Type:
Client:		Qty:
Prepared by:		Date:

## SERIES SPECIFICATIONS




To supply Tamlite MWP15 series of LED fixtures as specified. The body shall be polycarbonate and mount to an aluminum back plate. The LEDs shall be Selectable in CCT. The luminaire shall be cULus listed and DLC qualified




## PERFORMANCE SPECIFICATIONS

Luminance Distribution Chart

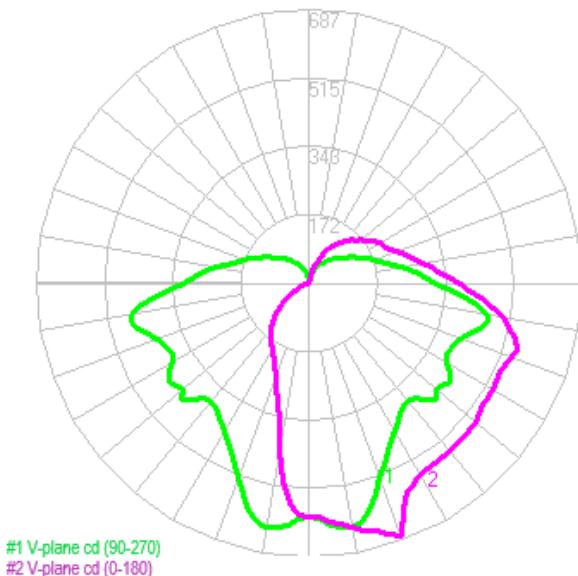

Isolux Diagram

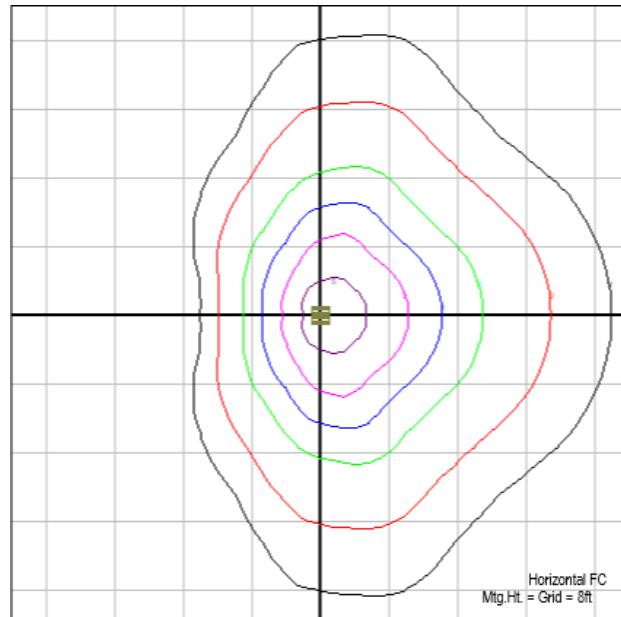

**Initial Lumen Output:** 2129lm

**UL Classification:** Wet Location Listed

**DLC Number:** PLHH3S66Z411

**Efficacy:** 137.2lm/w

**Ambient Operating Temp:** -20C to +40C

**CCN Number:** IFAM7.E359675

**Max Candela:** 686cd


**Certification Standards:** UL Safety US-CA, DLC

**Limited Product Warranty:** 5 Year(s)


Project:	
Location:	
Model#:	MWP15SW-120-BZ-PC
Client:	Type:
Prepared by:	Qty:
Prepared by:	Date:

## LED SPECIFICATIONS

### SPD

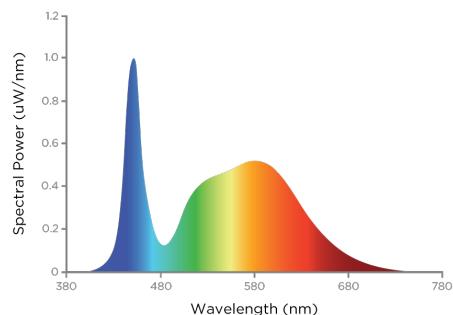

### TM-30

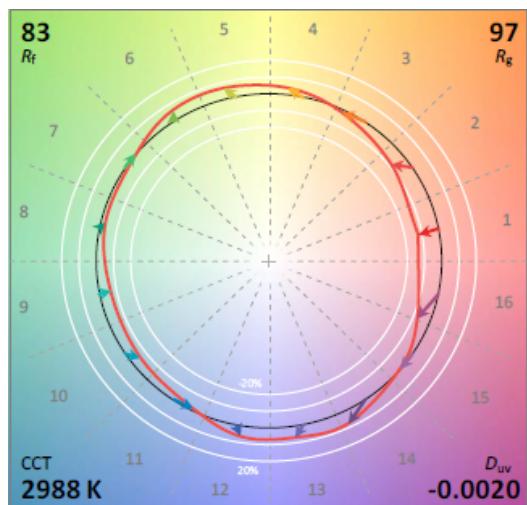

Source Type: LED

CRI: >80

L90: 50,000 Hrs

Duv: -0.002

Manufacturer: Lumileds

Rf: 83

Colour Temperature: 3000K, 4000K, 5000K Field Selectable

Part Number: L128 3080RA35003H1

Rg: 97

Chromaticity: x=0.3462 y=0.3583

Project:	
Location:	
Model#:	MWP15SW-120-BZ-PC
Client:	Type:
Prepared by:	Qty:
	Date:

## ELECTRICAL SPECIFICATIONS

**Driver Part Number:** HB-LPG015G-52

**Fixture Draw:** 15.52

**Dimming:** 0-10Vdc, (0% Min Light Level)

**Input Voltage:** 120Vac

**Current Draw @ 120Vac:** 0.1250A

**Input Frequency:** 50-60Hz

**Power Factor @ 120Vac:** >.90

## PHYSICAL SPECIFICATIONS

**Housing Material:** Aluminium Back Plate

**Lens Material:** Prismatic Polycarbonate

## SHIPPING INFORMATION

**OrderingCode(s):** MWP155K-120-BZ-PC

**Box Weight:** 1.05kg

**Carton Weight:** 11.4kg

**Box Quantity:** 1

**Carton Quantity:** 10

**Box Dimensions (L-W-H):** 154 x 88 x

225mm

**Carton Dimensions (I-W-H):**

460x325x245mm

## LINE DRAWING

### Line Drawings

