

Project:	
Location:	
Model#: MWP155K-120-BZ-PC	Туре:
Client:	Qty:
Prepared by:	Date:

SERIES SPECIFICATIONS




To supply Tamlite MWP15 series of LED fixtures as specified. The body shall be polycarbonate and mount to an aluminum back plate. The LEDs shall be 5000K in CCT. The luminaire shall be cETLus and DLC listed.



PERFORMANCE SPECIFICATIONS

Isolux Diagram

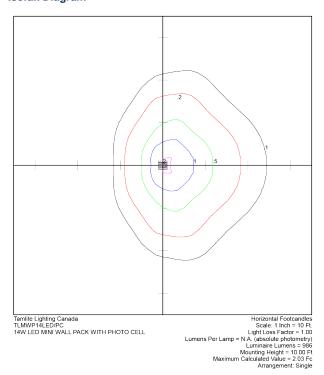



Project:	
Location:	
Model#: MWP155K-120-BZ-PC	Туре:
Client:	Qty:
Prepared by:	Date:

Initial Lumen Output: 986lm **UL Classification:** Wet Location Listed DLC Number: PLHH3S66Z411

Efficacy: 76lm/W Ambient Operating Temp: -20C to +40C

CCN Number: IFAM7.E359675


Max Candela: 232cd at H15 V20 Certification Standards: UL Safety US-

CA, DLC

Limited Product Warranty: 5 Year(s)

LED SPECIFICATIONS

SPD



Source Type: LED **CRI:** >80 **L90:** 50,000 Hrs

Colour Temperature: 5000K Chromaticity: x=0.3462 y=0.3583

ELECTRICAL SPECIFICATIONS

Input Voltage: 120Vac Input Frequency: 50-60Hz Fixture Draw: 13.04W

Current Draw@ 120Vac: 0.1250A Power Factor @120Vac: >.90

PHYSICAL SPECIFICATIONS

Housing Material: Aluminium Back Plate Lens Material: Prismatic Polycarbonate

SHIPPING INFORMATION

OrderingCode(s): MWP155K-120-BZ-PC Box Dimensions (L-W-H): 310 x 210 x **Box Quantity: 1**

125 mm Box Weight: 1.48 kg Carton Quantity: 4 Carton Weight: 6.1 kg

Carton Dimensions (I-W-H): 640 x 440 x

395 mm



Project:	
Location:	
Model#: MWP155K-120-BZ-PC	Туре:
Client:	Qty:
Prepared by:	Date:

LINE DRAWING

Line Drawings

