



Project:	
Location:	
Model#: HBX10040K-347V	Type:
Client:	Qty:
Prepared by:	Date:


SERIES SPECIFICATIONS

To supply TamLite HBX series of LED fixtures as specified. The luminaire shall operate at 347Vac. The housing shall be constructed of powder-coated steel with a heat and impact resistant polycarbonate lens. All parts shall be corrosion resistant. The fixture shall be cULus Listed. The fixture shall be DLC Approved




PERFORMANCE SPECIFICATIONS

Luminance Distribution Chart

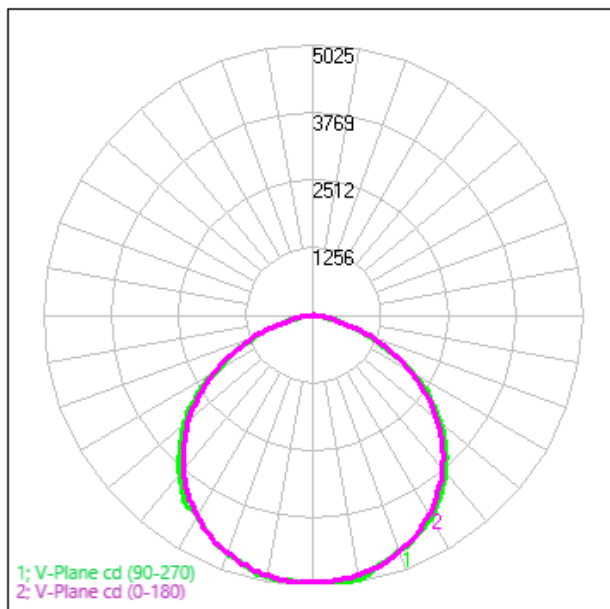

Isolux Diagram

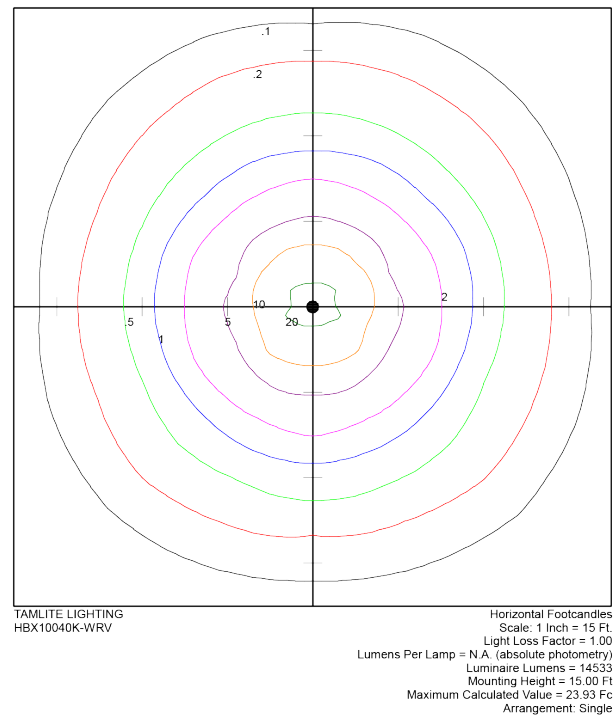


Project:	
Location:	
Model#: HBX10040K-347V	Type:
Client:	Qty:
Prepared by:	Date:

LED SPECIFICATIONS


R Tables

R1	80	R9	2
R2	91	R10	77
R3	95	R11	77
R4	79	R12	60
R5	80	R13	83
R6	86	R14	98
R7	84	R15	74
R8	61	--	--

SPD

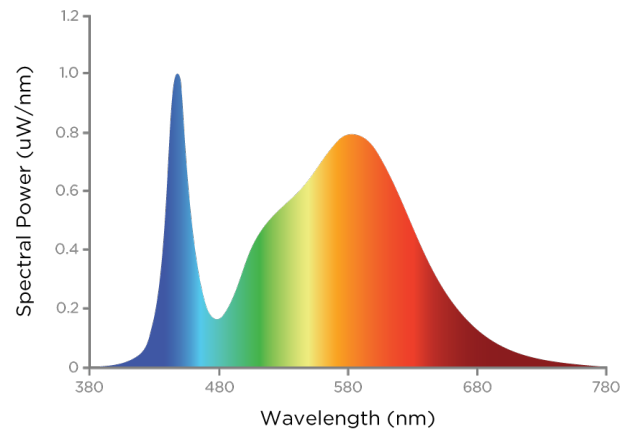

TM-30

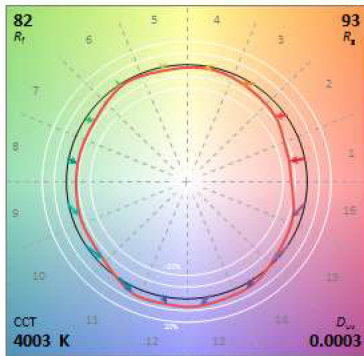

Source Type: LED

Rf: 82

Colour Temperature: 4000K

Duv: 0.0004

Part Number: Array Type

Rg: 93

Chromaticity: x=0.3805 y=0.3776

CRI: >80

L90: 50,000 Hrs.

Colour Tolerance: 5 SDCM

Project:	
Location:	
Model#: HBX10040K-347V	Type:
Client:	Qty:
Prepared by:	Date:

ELECTRICAL SPECIFICATIONS

Driver Manufacturer: ARC Smart Electronic Co., Ltd.
Input Frequency: 50-60Hz
Inrush Current: 0.25A2S
Driver MTBF: 320,000hrs
Dimming: 1-10Vdc, (10% Min Light Level)
Short Circuit Protection: Auto recovery. The output recovers when short is removed.

Driver Part Number: ARC-DI-50I1000-MUV-D1R
Fixture Draw: 103.8W
Power Factor at 120Vac: >.90
Max Operating Case Temperature: 90C
Dimming Current mA: .5mA draw
Driver Certifications: c-RU-us Class 2, FCC Part 15 Class B, RoHS

Input Voltage: 347Vac
Current Draw at 347Vac: 0.2997
THD at 120Vac(%): <20%
Surge Suppression: Line to line 2kV, line to ground 4kV, IEC 61000-4-5
Over Temperature Protection: Auto recovery. The output recovers when the temperature returns to normal.

PHYSICAL SPECIFICATIONS

Finish Colour: White
Mounting: Suspended with chain included
Lens Type: Frosted

Finish Type: Painted Steel
Housing Material: Steel
Reflector Material: Steel with UV Painting

Wiring: Rear Access Plate
Lens Material: Polycarbonate
Entries: Rear and end entries

SHIPPING INFORMATION

OrderingCode(s): HBX10050K-347V


Box Weight: 5.5 kg

Box Quantity: 1

Box Dimensions (L-W-H): 655 x 295 x 85 mm

LINE DRAWING

Line Drawings

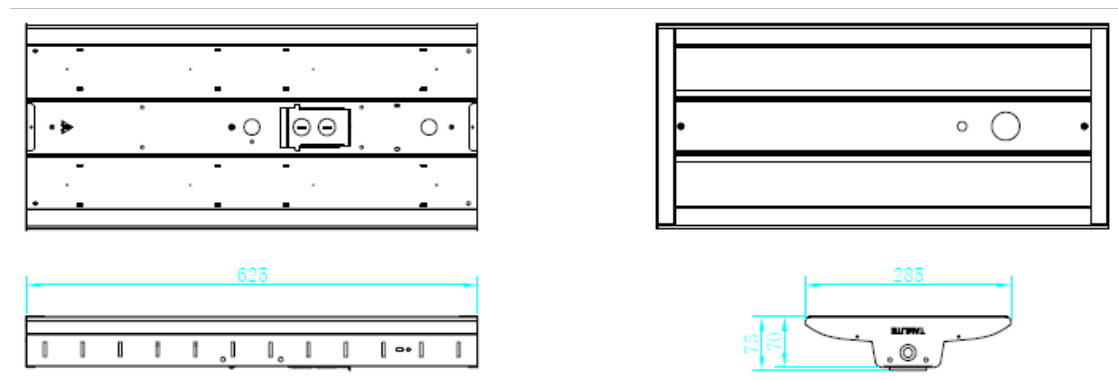



Project:	
Location:	
Model#: HBX10040K-347V	Type:
Client:	Qty:
Prepared by:	Date:

SERIES ARCHITECTURE

Series Architecture

HBX - - - - -													
Part	Wattage		CCT		Mounting		Voltage		Finish		Accessories		
HBX	50	50W	30K	3000K	[Blank]	Suspended	UNV	120-277 VAC	WH	White	O	Occupancy Sensor	
	100	100W	40K	4000K	SM	Surface Mount	347	347 VAC			WG	Wire Guard	
	150	150W	50K	5000K	PM	Pendant Mount	WRV	120-347 VAC			SM	Surface Mount Kit	
	200	200W									PM	Pendant Mount Kit	
											C10	10 ft Cabtire Set	
											OC-REM	PIR Programer	

Optional Extras: EM-HBOS, HBX100-WG, HBX-C10, HBX-SM, HBX-PM, HBX100-SLQ