



Project:	
Location:	
Model#: EUD4730K-120-WH	Type:
Client:	Qty:
Prepared by:	Date:

**SERIES SPECIFICATIONS**




To supply Tamlite EUD series of LED fixtures as specified. The luminaire shall operate at 120Vac and use a TRIAC dimmable, constant current type Integral driver. The housing shall be constructed of die cast Aluminium finished with a textured powder coat over a chromate conversion coat. All hardware to be stainless steel. Wiring compartment to be Integral with hinged wiring cover. Optics to be constructed of Acrylic and be sealed via captive gasket. Rated for insulated ceiling and Air Tight (ASTM-E283) applications. Connecting cable shall be FT1 plenum rated. Fixture shall be cULus and Energy Star approved.




**PERFORMANCE SPECIFICATIONS**

**Luminance Distribution Chart**

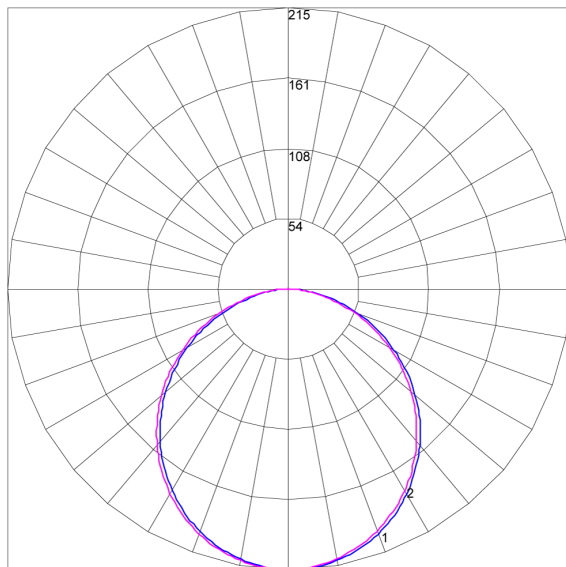

Maximum Candela = 215.002 Located At Horizontal Angle = 315, Vertical Angle = 1  
 # 1 - Vertical Plane Through Horizontal Angles (315 - 135) (Through Max. Cd.)  
 # 2 - Vertical Plane Through Horizontal Angles (90 - 270)

**Isolux Diagram**

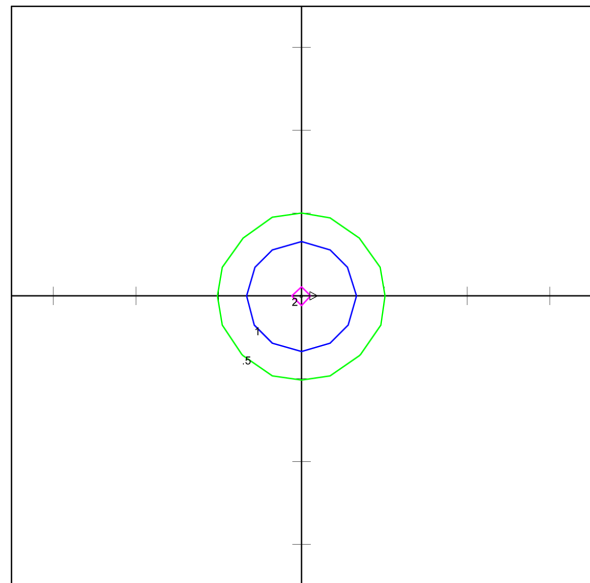

Tamlite Lighting Canada  
 10 Perdue Crt. Caledon, ON  
 EUD4730K-120V-WH  
 4 Inch 7W LED Disk Light  
 file done at 2700K

Horizontal Footcandles  
 Scale: 1 Inch = 10 Ft.  
 Light Loss Factor = 1.00  
 Lumens Per Lamp = N.A. (absolute photometry)  
 Luminaire Lumens = 600  
 Mounting Height = 10.00 Ft  
 Maximum Calculated Value = 2.15 Fc  
 Arrangement: Single



<b>Project:</b>	
<b>Location:</b>	
<b>Model#:</b> EUD4730K-120-WH	<b>Type:</b>
<b>Client:</b>	<b>Qty:</b>
<b>Prepared by:</b>	<b>Date:</b>

**Zonal Lumen Summary**

ZONE	LUMENS	ZONE	LUMENS	ZONE	LUMENS	ZONE	LUMENS	ZONE	LUMENS
0-10	20.32	40-50	107.86	80-90	10.92	120-130	0.08	160-170	0.07
10-20	58.04	50-60	96.57	90-100	0.04	130-140	0.10	170-180	0.03
20-30	87.51	60-70	72.65	100-110	0.05	140-150	0.11	--	--
30-40	104.79	70-80	40.89	110-120	0.07	150-160	0.11	--	--

**Co-efficient of Utilization**

CC	80				70				50			30			10			0
WALL	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
fc	20				20				20			20			20			0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	104	100	96	106	102	98	94	97	94	91	94	91	88	90	88	86	84
2	99	91	84	78	96	89	82	77	85	80	75	82	77	74	79	75	72	70
3	90	80	71	65	88	78	70	64	75	69	63	72	67	62	70	65	61	59
4	83	71	62	55	80	69	61	55	67	59	54	64	58	53	62	57	52	50
5	76	63	54	47	74	62	53	47	60	52	47	58	51	46	56	50	46	43
6	70	57	48	41	68	56	47	41	54	46	41	52	46	40	51	45	40	38
7	65	51	43	37	63	51	42	36	49	42	36	48	41	36	46	40	36	34
8	61	47	38	33	59	46	38	32	45	38	32	44	37	32	42	36	32	30
9	57	43	35	29	55	42	35	29	41	34	29	40	34	29	39	33	29	27
10	53	40	32	27	52	39	32	26	38	31	26	37	31	26	36	30	26	24

**Initial Lumen Output:** 540lm

**Beam Angle:** 110 deg

**Spacing Criteria:** 1.24(0-180), 1.24(90-270)

**Ambient Operating Temp:** -20C to +40C

**Limited Product Warranty:** 5 Year(s)

**Efficacy:** 77lm/W

**Field Angle:** 160 deg

**Environmental Rating(s):** IC Rated, Air Tight ASTM E283

**Certification Standards:** cETLus, Energy Star, Air Tight (ASTM-E283), CAN ICES-005(B) NMB-005(B)

**CBCP:** 215cd

**Luminaire Type:** Direct


**UL Classification:** Wet Location Listed

**CCN Number:** IFA07.E470484

<b>Project:</b>	
<b>Location:</b>	
<b>Model#:</b> EUD4730K-120-WH	<b>Type:</b>
<b>Client:</b>	<b>Qty:</b>
<b>Prepared by:</b>	<b>Date:</b>

**LED SPECIFICATIONS**

**SPD**

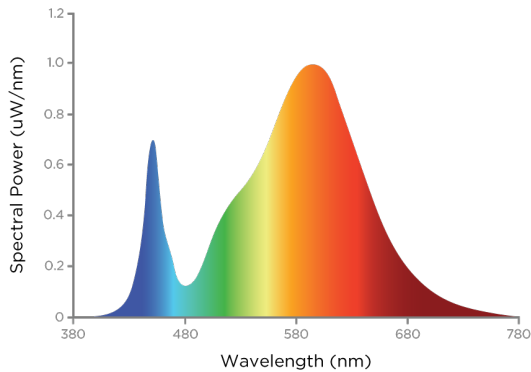

**Source Type:** LED  
**L90:** 25,000 Hrs.  
**Duv:** 0.000995

**CRI:** >80  
**Colour Temperature:** 3000K

**L70:** 44000 Hrs.  
**Chromaticity:** x=0.4538 y=0.4065

**ELECTRICAL SPECIFICATIONS**

**Input Voltage:** 120Vac  
**Current Draw at 120Vac:** 0.0656A  
**Power Factor at 120Vac:** > 0.90  
**Dimming Current mA:** .5mA draw

**Input Frequency:** 50/60 hz  
**Current Draw at 347Vac:**  
**Max Operating Case Temperature:** 40C  
**Over Temperature Protection:** Auto Recovery. Returning to normal after over temperature is removed.

**Fixture Draw:** 7.385W  
**Max On-Delay:** < 0.75 S  
**Dimming:** TRIAC (1-10Vdc, 10% Min Light Level)  
**Short Circuit Protection:** Auto Recovery. The output shall return to normal when the fault condition is removed.

**PHYSICAL SPECIFICATIONS**

**Finish Colour:** White  
**Mounting:** Recessed

**Finish Type:** Powder Coated  
**Housing Material:** Die-cast Aluminium

**Wiring:** Internal junction box for through circuit wiring. Connecting cable shall be FT1 plenum rated.  
**Lens Material:** UV Stabilized Acrylic

Project:	
Location:	
Model#: EUD4730K-120-WH	Type:
Client:	Qty:
Prepared by:	Date:


**SHIPPING INFORMATION**

OrderingCode(s): EUD4730K-120-WH

Box Quantity: 6

**LINE DRAWING**

Line Drawings

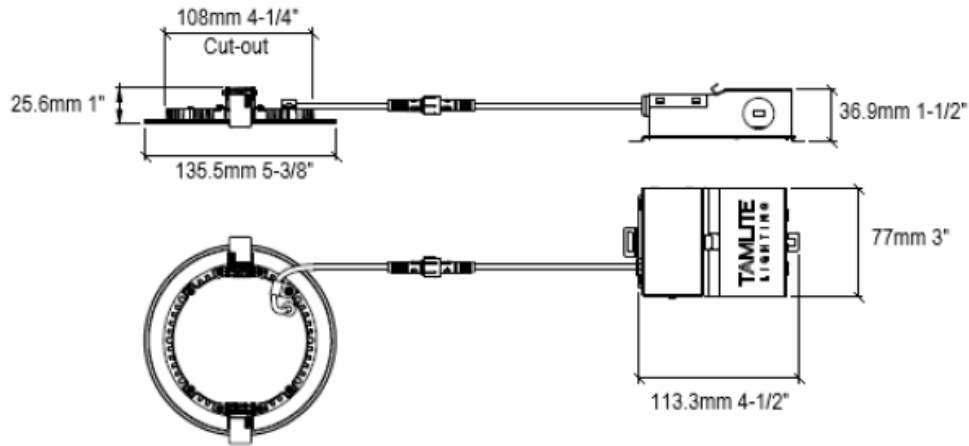

**SERIES ARCHITECTURE**

Series Architecture

Part	Size	Wattage	CCT	Voltage	Finish	Options
EUD	4 4 inch	7 7w	30K 3000K	120 120VAC	WH White	EUD4-BK Black Attachable faceplate
	6 6 inch	14 14w	40K 4000K	*Triac Dimmable	CC Custom	EUD4-SN Satin Nickel Attachable faceplate
			50K 5000K			EUD6-BK Black Attachable faceplate
			SW Selectable White			EUD6-SN Satin Nickel Attachable faceplate
			27K,30K,35K,40K,50K			GR4-WH Goof ring for EUD-4
						GR6-WH Goof ring for EUD-6

Optional Extras: DL2000, RIP46, RIP4L, EUD4-BK, EUD4\_SN, LY-VB, GR4-WH