

Project:	
Location:	
Model#: SLSQ63K-UNV-BZ	Туре:
Client:	Qty:
Prepared by:	Date:

SERIES SPECIFICATIONS



To supply Tamlite's SLSQ Series of LED Square Step Light Luminaire as specified. The luminaire shall operate at 120-277Vac. The housing shall be constructed of powder coated diecast Aluminium with impact resistant polycarbonate lens. The LEDs shall be as specified LUMILEDS® LUXEON 3030 2D LED chips. The luminaire shall be cULus Listed.

















PERFORMANCE SPECIFICATIONS

Luminance Distribution Chart



Isolux Diagram



Horizontal Footcandles Scale: 1 Inch = 1.5 Ft Light Loss Factor = 1.00 Lumens Per Lamp = 559.1 Total Lamp Lumens = 559.1 Mounting Height = 1.50 Ft Maximum Calculated Value = 151.77 Fc Arrangement: Single



Project:	
Location:	
Model#: SLSQ63K-UNV-BZ	Туре:
Client:	Qty:
Prepared by:	Date:

Zonal Lumen Summary

ZONE	LUMENS	ZONE	LUMENS	ZONE	LUMENS	ZONE	LUMENS	ZONE	LUMENS
0-10	29.8	40-50	110.51	80-90	1.2	120-130	2.04	160-170	1.24
10-20	82.05	50-60	75.32	90-100	1.25	130-140	2.19	170-180	0.44
20-30	105.5	60-70	27.34	100-110	1.5	140-150	2.15		
30-40	108.68	70-80	4.26	110-120	1.78	150-160	1.85		

Initial Lumen Output: 555lm Spacing Criteria: 1.15 (C0/180), 0.85

(C90/270)

Ambient Operating Temp: -20C to +40C Limited Product Warranty: 5 Year(s) Efficacy: 81.19lm/W

Environmental Rating(s): IP65
Certification Standards: UL Safety US-

CA


BUG Rating: B0-U2-G0

UL Classification: Wet Location Listed

CCN Number: IFAM7.E359675

LED SPECIFICATIONS

SPD



Source Type: LED

CRI: >70

Chromaticity: x=0.43693 y=0.40407

Manufacturer: Lumileds®

L70: 36000 Hrs.

Colour Tolerance: 5 SDCM

Part Number: LUXEON 3030 2D Colour Temperature: 3000K

Duv: 0.0005



Project:	
Location:	
Model#: SLSQ63K-UNV-BZ	Туре:
Client:	Qty:
Prepared by:	Date:

ELECTRICAL SPECIFICATIONS

Input Voltage: 120-277Vac
Auxiliary Control:
Dimming Current mA:

Driver Certifications: c-RU-us Class 2,

FCC Part 15 Class B, RoHS

Input Frequency: 50/60 hz

Power Factor at 120Vac: > 0.90

Over Temperature Protection: Auto
Recovery. Returning to normal after over

temperature is removed.

Fixture Draw: 6.89W

Dimming: 0-10Vdc, (0% Min Light Level) **Short Circuit Protection:** Auto Recovery. The output shall return to normal when the

fault condition is removed.

PHYSICAL SPECIFICATIONS

Finish Colour: Bronze (RAL-8019)
Housing Material: ADC12 Aluminium

Finish Type: Textured powder coat over

chromate conversion coat

Lens Material: PMMA

Mounting: Wall Mount Lens Type: Clear

SHIPPING INFORMATION

OrderingCode(s): SLSQ63K-UNV-BZ

Carton Quantity: 24

Box Quantity: 1

Carton Dimensions (I-W-H): 435 x 400 x

310 mm

Box Dimensions (L-W-H): 141 x 96 x 145


mm




Project:						
Location:						
Model#: SLSQ63K-UNV-BZ	Туре:					
Client:	Qty:					
Prepared by:	Date:					

LINE DRAWING

Line Drawings



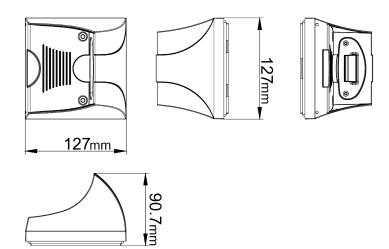

SERIES ARCHITECTURE

Series Architecture

SLS Nomenclature

Part	Watta CCT		Mounting		Volta	ge	Finish			
SLSQ	6	6W	3K	3000K	Blank	Surface	UNV	120-277VAC	BZ	Bronze
SLSR			5K	5000K					BK	Black
									WH	White
									CC	Custom