

Project:		
Location:		
Model#:	FLX1003KP-UNV-BZ	Type:
Client:		Qty:
Prepared by:		Date:

SERIES SPECIFICATIONS




To supply Tamlite's FLX Series of LED floodlights as specified. The luminaire shall operate at 120-277Vac and use a constant current type driver. Driver shall be dimmable by 1-10Vdc control. The housing shall be constructed of powder-coated die-cast Aluminium with a screw down rear wiring compartment with pre-fitted IP68 stainless steel strain relief with 6ft cab tire, and an impact resistant PMMA Optic. A durable formed gasket shall be provided between the enclosure and the lens, and the wiring compartment and housing. The reflector shall be made of highly specular material and contoured to maximize light output efficiency. All parts shall be corrosion resistant. LEDs shall be as specified, LUXEON® 3030 2D LED chips. The luminaire shall be cULus and DLC Listed.




PERFORMANCE SPECIFICATIONS

Luminance Distribution Chart

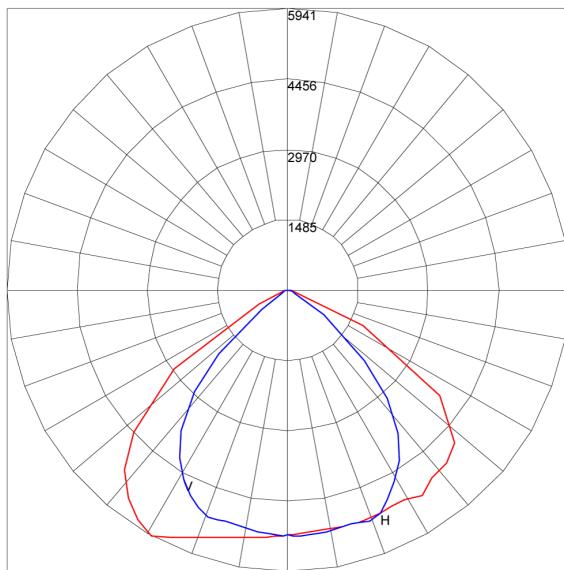

Maximum Candela = 5940.872 Located At Horizontal Angle =-29, Vertical Angle = 0
 H - Horizontal Axial Candela
 V - Vertical Axial Candela

Isolux Diagram

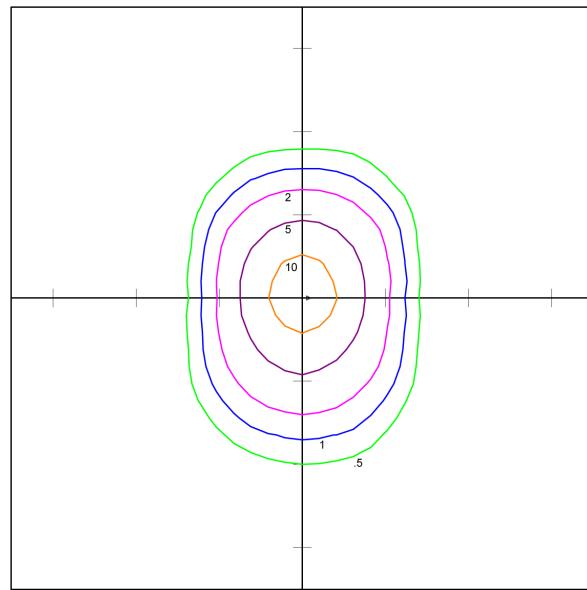


TAMILITE LIGHTING
 CALEDON, ONTARIO
 TAMILITE 100W LED SQ FLOOD LIGHT LUMINAIRE
 FLX100XXY-UNV-ZZ

Horizontal Footcandles
 Scale: 1 Inch = 20 Ft.
 Light Loss Factor = 1.00
 Lumens Per Lamp = N.A. (absolute photometry)
 Luminaire Lumens = 13177
 Mounting Height = 10.00 Ft
 Maximum Calculated Value = 12.94 Fc
 Arrangement: Single

Zonal Lumen Summary

ZONE	LUMENS	ZONE	LUMENS	ZONE	LUMENS	ZONE	LUMENS	ZONE	LUMENS
0-10	493.59	40-50	2949.66	80-90	21.22	120-130	0.00	160-170	0.00
10-20	1462.49	50-60	2057.08	90-100	0.00	130-140	0.00	170-180	0.00
20-30	2378.19	60-70	741.39	100-110	0.00	140-150	0.00	--	--
30-40	2957.33	70-80	116.02	110-120	0.00	150-160	0.00	--	--

BUG Graph

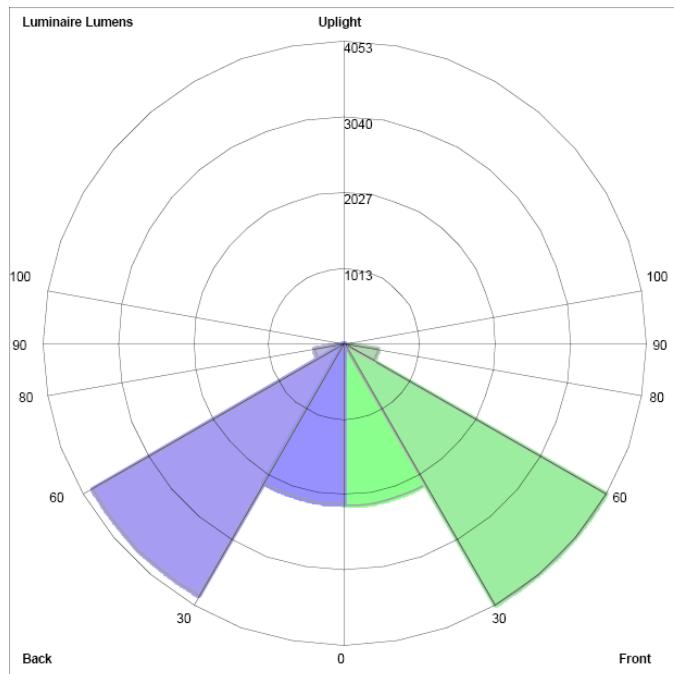

Luminaire Lumens:

Front: Low=2178.7, Medium=4053.4, High=453.6, Very High=11.8
 Back: Low=2155.6, Medium=3910.7, High=403.8, Very High=9.4
 Uplight: Low=0.0, High=0.0

LUMINAIRE CLASSIFICATION SYSTEM (LCS)

	Lumens	% Lamp	% Luminaire
FL - Front-Low (0-30)	2178.7	N.A.	16.5
FM - Front-Medium (30-60)	4053.4	N.A.	30.8
FH - Front-High (60-80)	453.6	N.A.	3.4
FVH - Front-Very High (80-90)	11.8	N.A.	0.1
BL - Back-Low (0-30)	2155.6	N.A.	16.4
BM - Back-Medium (30-60)	3910.7	N.A.	29.7
BH - Back-High (60-80)	403.8	N.A.	3.1
BVH - Back-Very High (80-90)	9.4	N.A.	0.1
UL - Uplight-Low (90-100)	0.0	N.A.	0.0
UH - Uplight-High (100-180)	0.0	N.A.	0.0
Total	13177.0	N.A.	100.0
BUG Rating	B3-U0-G1		

Initial Lumen Output: 13,072lm

CBCP: 5,175cd

BUG Rating: B3-U0-G1

Ambient Operating Temp: -40C to +40C

CCN Number: IFAM7.E359675

Efficacy: 132.48lm/W

NEMA Type: 7H x 6V

Environmental Rating(s): IP65

Certification Standards: UL Safety US-CA

, DLC

Limited Product Warranty: 5 Year(s)

Max Candela: 5,940cd

Luminaire Type: Flood Light

UL Classification: Wet Location Listed


DLC Number: PLK1LDD6TXKG

LED SPECIFICATIONS


R Tables

R1	69
R2	82
R3	93
R4	68
R5	68
R6	74
R7	78
R8	46

SPD

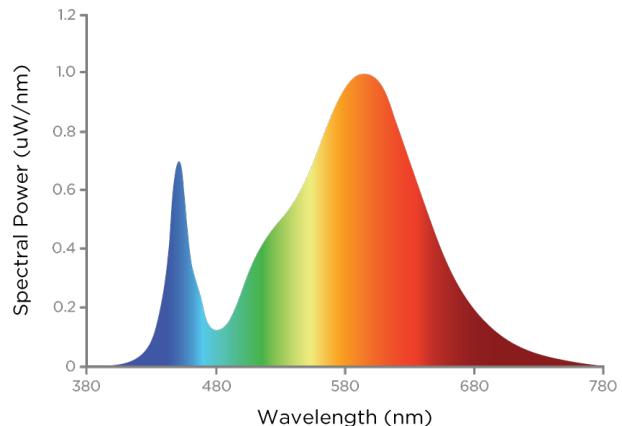

TM-30

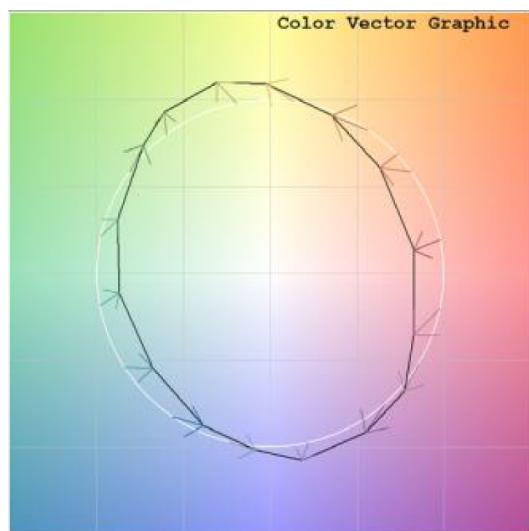

Source Type: LED

CRI: >70

L70: 50000 Hrs.

Chromaticity: x=0.4340 y=0.4055

Manufacturer: Lumileds®

Rf: 70

L90: 36,000 Hrs.

Duv: 0.005

Part Number: LUXEON 3030 2D

Rg: 96

Colour Temperature: 3000K

ELECTRICAL SPECIFICATIONS

Driver Manufacturer: TOWIN®	Driver Part Number: DF120W-40C3000	Input Voltage: 120-277Vac
Input Frequency: 50/60 hz	Fixture Draw: 96.37W	Current Draw at 120Vac: 0.82
Current Draw at 277Vac: 0.36	Inrush Current: 30A	Max On-Delay: < 1 S
Power Factor at 120Vac: > 0.90	Power Factor at 347Vac:	THD at 120Vac(%): < 10%
THD at 277Vac(%): < 15%	Driver MTBF: 200,000 hrs	Max Operating Case Temperature: 85C
Surge Suppression: 4kV	Dimming: 0-10Vdc, (0% Min Light Level)	Dimming Current mA: 0.1
Over Temperature Protection: Auto recovery. Current returns to normal after over temperature is removed.	Short Circuit Protection: Auto recovery. The output shall return to normal when the fault condition is removed.	Driver Certifications: c-RU-us Class 2, FCC Part 15 Class B, RoHS

PHYSICAL SPECIFICATIONS


Finish Colour: Bronze (RAL-8019)	Finish Type: Textured powder coat over chromate conversion coat	Wiring: 6' 18-3 SJTW Cord Whip
Mounting: Square Pole	Housing Material: ADC12 Aluminium	Lens Material: PMMA
Lens Type: Clear Optics	EPA: 0.357 ft2 Horizontal	Entries: Stainless Steel Strain Relief

SHIPPING INFORMATION

Ordering Code(s): FLX1003KP-UNV-BZ	Box Weight: 5.82 kg	Box Quantity: 1	Box Dimensions (L-W-H): 645 x 360 x 125 mm
---	----------------------------	------------------------	---

LINE DRAWING

Line Drawings

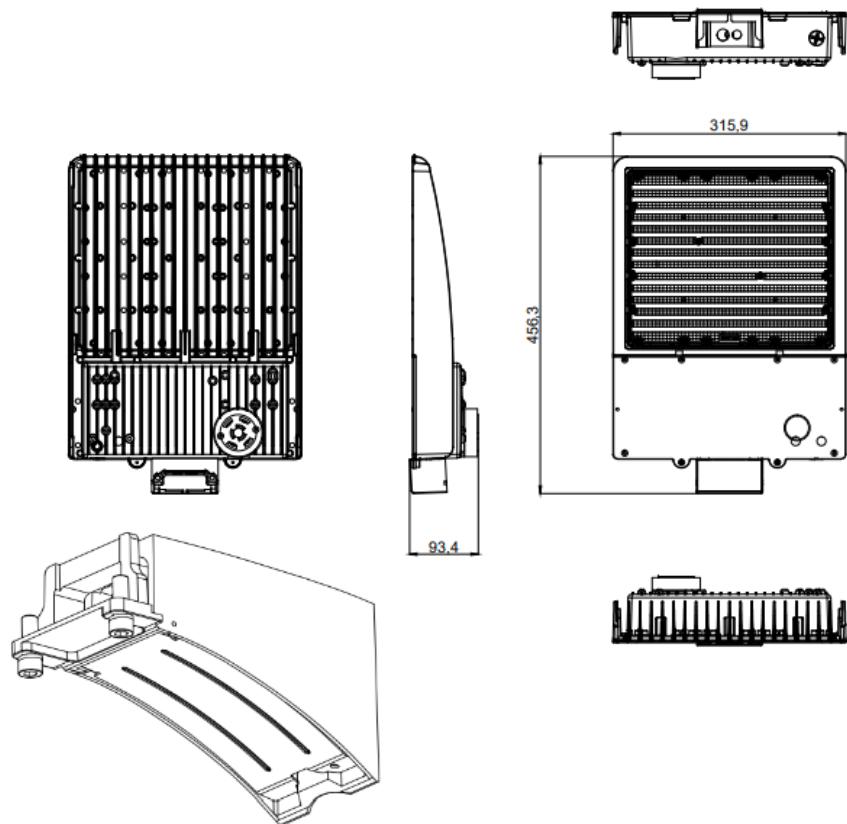

FLX-PA Ordered and shipped separately

SERIES ARCHITECTURE

Series Architecture

FLX									
Part	Wattage		CCT		Mounting		Voltage		Finish
FLX	150	150W	SW	Selectable White 3K, 4K, 5K	P	Pole Arm	WRV	120-347VAC	BZ Bronze*
	400	400W			S	Slip fitter (2-3/8" O.D.)			
					T	Trunnion*			

*Samil Trunion; 100-150W. Large Trunion; 230-400W

*Stocked in Bronze Finish

EPA CHART (ft²)

Model					
	Single	2 @ 90	2 @ 180	3 @ 90	4 @ 90
FLX 80-150W Mounted with Slipfitter at 45°	0.550	2.079	1.1400	2.4500	3.2200
FLX 230-300W Mounted with Slipfitter at 45°	0.594	2.764	1.1180	3.3580	3.953
FLX 400W Mounted with Slipfitter at 45°	0.671	3.229	1.2910	3.8750	4.5200
FLX 80-150W Mounted with Slipfitter at 90°	0.357	0.920	1.1370	1.4980	1.847
FLX 230-300W Mounted with Slipfitter at 90°	0.382	1.020	1.2920	1.6600	2.0530
FLX 400W Mounted with Slipfitter at 90°	0.448	1.1620	1.3690	1.8470	2.3520

Tamlite is not responsible for overloading of poles. The buyer must ensure that the fixtures to be installed do not exceed the structural limits of the poles, and are appropriate to the wind region. Please consult our specifications or contact an authorized pole vendor if you require assistance.

Optional Extras: AR-N7S, AR-N3PV-UNV