

|                                |              |
|--------------------------------|--------------|
| <b>Project:</b>                |              |
| <b>Location:</b>               |              |
| <b>Model#:</b> CVP125KP-UNV-SV | <b>Type:</b> |
| <b>Client:</b>                 | <b>Qty:</b>  |
| <b>Prepared by:</b>            | <b>Date:</b> |

## SERIES SPECIFICATIONS



To supply Tamlite CVP Series of Protected LED vapour proof fixtures as specified. The luminaire shall operate at 120-277Vac. The housing shall be constructed of die-cast aluminum with a borosilicate glass globe, and die-cast protective cage. The fixture shall be Wet Location listed. A durable formed gasket shall be provided between the enclosure and the globe. All parts shall be corrosion resistant. The fixture shall be c-UL-us approved.



## PERFORMANCE SPECIFICATIONS


**Initial Lumen Output:** 1080lm  
**Environmental Rating(s):** IP65  
**Certification Standards:** UL Safety US-CA

**Efficacy:** 90lm/W  
**UL Classification:** Wet Location Listed  
**CCN Number:** IFA07.E470484

**Luminaire Type:** Caged Vapour Proof  
**Ambient Operating Temp:** -40C to +50C  
**Limited Product Warranty:** 5 Year(s)

## LED SPECIFICATIONS

### SPD

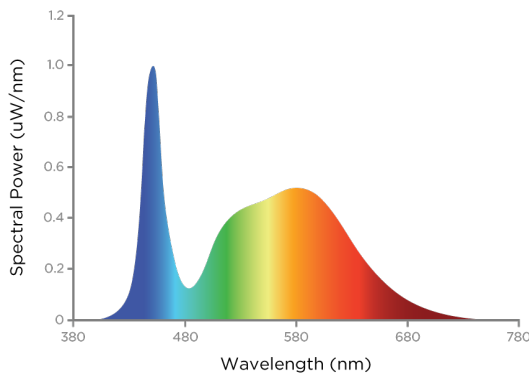

**Source Type:** LED  
**L70:** 36000 Hrs.  
**Duv:** 0.0018

**Part Number:** COB  
**Colour Temperature:** 5000K

**CRI:** >80  
**Chromaticity:** x=0.3439 y=0.3543



|                                |              |
|--------------------------------|--------------|
| <b>Project:</b>                |              |
| <b>Location:</b>               |              |
| <b>Model#:</b> CVP125KP-UNV-SV | <b>Type:</b> |
| <b>Client:</b>                 | <b>Qty:</b>  |
| <b>Prepared by:</b>            | <b>Date:</b> |

### ELECTRICAL SPECIFICATIONS

**Input Voltage:** 120-277Vac  
**Current Draw at 120Vac:** 0.1000A  
**Dimming:** 0-10Vdc, (0% Min Light Level)  
**Driver Certifications:** c-RU-us Class 2, FCC Part 15 Class B, RoHS

**Input Frequency:** 50/60 hz  
**Power Factor at 120Vac:** > 0.90  
**Over Temperature Protection:** Auto Recovery, The fixture shall shut down and return to operation when the temperature returns to normal.

**Fixture Draw:** 12W  
**THD at 120Vac(%):** 20%  
**Short Circuit Protection:** Auto Recovery. The output shall return to normal when the fault condition is removed.

### PHYSICAL SPECIFICATIONS

**Finish Colour:** Grey  
**Mounting:** Ceiling, Mounting Tabs on 4" Box  
**Lens Type:** Clear

**Finish Type:** Textured powder coat over chromate conversion coat  
**Housing Material:** Die-cast Aluminium

**Wiring:** Internal, 1/2" NPT Coin Plugs  
**Lens Material:** PMMA

### SHIPPING INFORMATION

**OrderingCode(s):** CVP125KP-UNV-SV  
**Box Weight:** 1.5 kg

**Box Quantity:** 1

**Box Dimensions (L-W-H):** 145 x 275 x 190 mm

|                         |       |
|-------------------------|-------|
| Project:                |       |
| Location:               |       |
| Model#: CVP125KP-UNV-SV | Type: |
| Client:                 | Qty:  |
| Prepared by:            | Date: |

LINE DRAWING

Line Drawings

