

Project:	
Location:	
Model#: SEL-2	Type:
Client:	Qty:
Prepared by:	Date:

SERIES SPECIFICATIONS




High-performance and reliability encapsulate the essence of the Tamlite Lighting SEL-2 EMERGENCY light. Designed with robust, flame-retardant housing and equipped with dual adjustable LED heads, as well as remote capability upto 32W, this emergency light ensures optimal illumination and safety during power failures. Ideal for a variety of settings including commercial, industrial, and residential areas, the SEL-2 features a compact, easy-to-install design and a powerful battery backup for continued operation in emergencies. Essential for maintaining visibility and safety, this unit is a top choice for emergency lighting solutions.



PERFORMANCE SPECIFICATIONS

Isolux Diagram

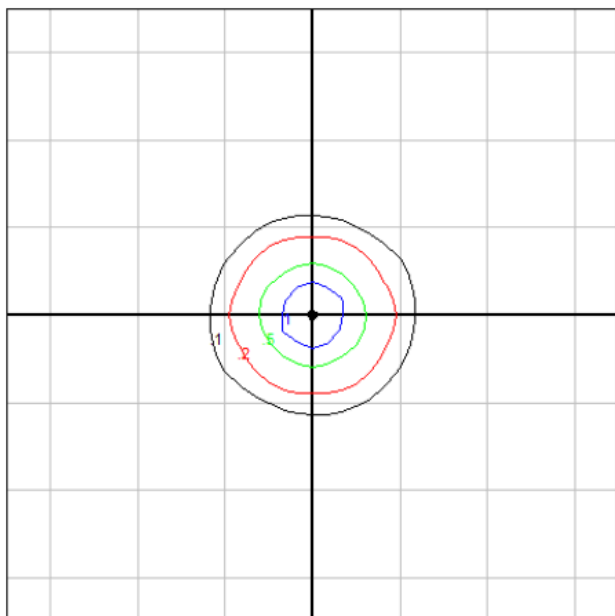

Initial Lumen Output: 212 lm

Beam Angle: 60°

Ambient Operating Temp: 3°C to 30°C /
37.4°F to +86°F

Efficacy: 35

Luminaire Type: Emergency Battery

Certification Standards: UL924, C22.2
No. 141-15

Max Candela: 170.9cd

Environmental Rating(s): Damp location

Limited Product Warranty: 2 years for
battery 3 years for fixture

Project:	
Location:	
Model#: SEL-2	Type:
Client:	Qty:
Prepared by:	Date:

LED SPECIFICATIONS

Source Type: LED CRI: > 80 L70: >54,000 Hrs
 Colour Temperature: 6000

ELECTRICAL SPECIFICATIONS

Input Voltage: 120V-347Vac Input Frequency: 50/60 Hz Current Draw at 120Vac: 0.19A
 Current Draw at 277Vac: 0.23A Current Draw at 347Vac: 0.27A Max On-Delay: Power Factor at 347Vac:
 Power Factor at 120Vac: > 0.8 Power Factor at 277Vac: > 0.8 > 0.8
 Over Temperature Protection: YES Short Circuit Protection: YES

EMERGENCY INFORMATION

Input Voltage: 120V-347V Max Power Input: 6W Output Power: 2*2W
 Emergency Runtime: >90minutes Battery Type: lead battery Battery Recharge Time: 24hours
 Emergency Certifications: UL924

PHYSICAL SPECIFICATIONS

Finish Colour: White Mounting: Back Wall Mount Lens Material: PC

SHIPPING INFORMATION

OrderingCode(s): 0625-2654 SEL-2 LED Box Quantity: 1 Box Dimensions (L-W-H): 330 x 254 x
 STEEL EM 32W RC 120/347 Carton Dimensions (L-W-H): 470 x 340 x 102 mm / 13 x 10 x 4 inches
 Carton Quantity: 5 255 mm / 0.3 x 0 x 470 inches Carton Weight: 13.6

LINE DRAWING

Line Drawings

