TAMLITE
LIGHTING

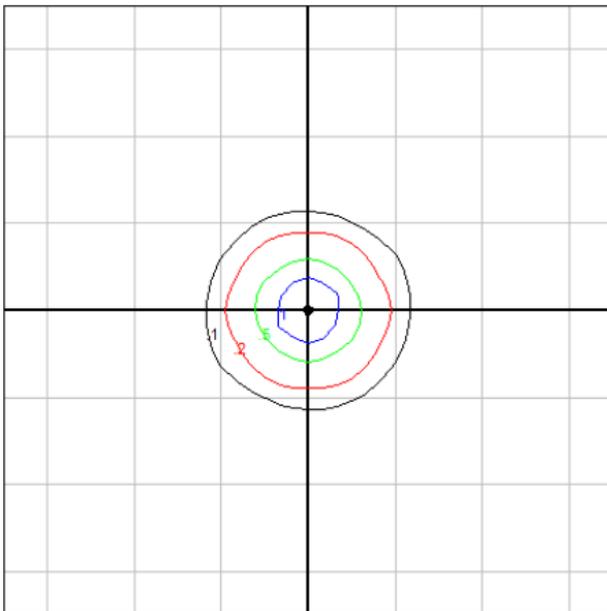| Project:	
Location:	
Model#: SEL-2	**Type:**
Client:	**Qty:**
Prepared by:	**Date:**

SERIES SPECIFICATIONS

High-performance and reliability encapsulate the essence of the Tamlite Lighting SEL-2 EMERGENCY light. Designed with robust, flame-retardant housing and equipped with dual adjustable LED heads, as well as remote capability up to 32W, this emergency light ensures optimal illumination and safety during power failures. Ideal for a variety of settings including commercial, industrial, and residential areas, the SEL-2 features a compact, easy-to-install design and a powerful battery backup for continued operation in emergencies. Essential for maintaining visibility and safety, this unit is a top choice for emergency lighting solutions.

120|347 DUAL VOLTAGE DAMP LOCATION LED c(UL)us LISTED

PERFORMANCE SPECIFICATIONS

Isolux Diagram

Initial Lumen Output: 212 lm
Beam Angle: 60O
Ambient Operating Temp: 3ºC to 30ºC / 37.4ºF to +86ºF

Efficacy: 35
Luminaire Type: Emergency Battery
Certification Standards: CSA

Max Candela: 170.9cd
Environmental Rating(s): Damp location
Limited Product Warranty: 2 years for battery 3 years for fixture

Project:	
Location:	
Model#: SEL-2	**Type:**
Client:	**Qty:**
Prepared by:	**Date:**

LED SPECIFICATIONS

Source Type: LED
Colour Temperature: 6000K

CRI: > 80

L70: >54,000 Hrs

ELECTRICAL SPECIFICATIONS

Input Voltage: 120V-347Vac
Current Draw at 277Vac: 0.23A
Power Factor at 120Vac: > 0.8
Over Temperature Protection: YES

Input Frequency: 50/60 Hz
Current Draw at 347Vac: 0.27A
Power Factor at 277Vac: > 0.8
Short Circuit Protection: YES

Current Draw at 120Vac: 0.19A
Max On-Delay: 1S
Power Factor at 347Vac: > 0.8

EMERGENCY INFORMATION

Input Voltage: 120V-347V
Emergency Runtime: >90minutes
Emergency Certifications: UL924

Max Power Input: 6W
Battery Type: lead battery

Output Power: 2*2W
Battery Recharge Time: 24hours

PHYSICAL SPECIFICATIONS

Finish Colour: White

Mounting: Back Wall Mount

Lens Material: PC

SHIPPING INFORMATION

OrderingCode(s): 0625-2654 SEL-2 LED
STEEL EM 32W RC 120/347
Carton Quantity: 5

Box Quantity: 1
Carton Dimensions (I-W-H): 470 x 340 x
255 mm / 0.3 x 0 x 470 inches

Box Dimensions (L-W-H): 330 x 254 x 102
mm / 13 x 10 x 4 inches
Carton Weight: 013.6 Kg

LINE DRAWING

Line Drawings

SERIES	DIMENSIONS		
	A	B	C
SEL-2	11.81" 300mm	9. 25" 235mm	2. 95" 75mm