



Project:	
Location:	
Model#: SEL-2	Type:
Client:	Qty:
Prepared by:	Date:

**SERIES SPECIFICATIONS**




High-performance and reliability encapsulate the essence of the Tamlite Lighting SEL-2 EMERGENCY light. Designed with robust, flame-retardant housing and equipped with dual adjustable LED heads, as well as remote capability up to 32W, this emergency light ensures optimal illumination and safety during power failures. Ideal for a variety of settings including commercial, industrial, and residential areas, the SEL-2 features a compact, easy-to-install design and a powerful battery backup for continued operation in emergencies. Essential for maintaining visibility and safety, this unit is a top choice for emergency lighting solutions.



**PERFORMANCE SPECIFICATIONS**

**Isolux Diagram**

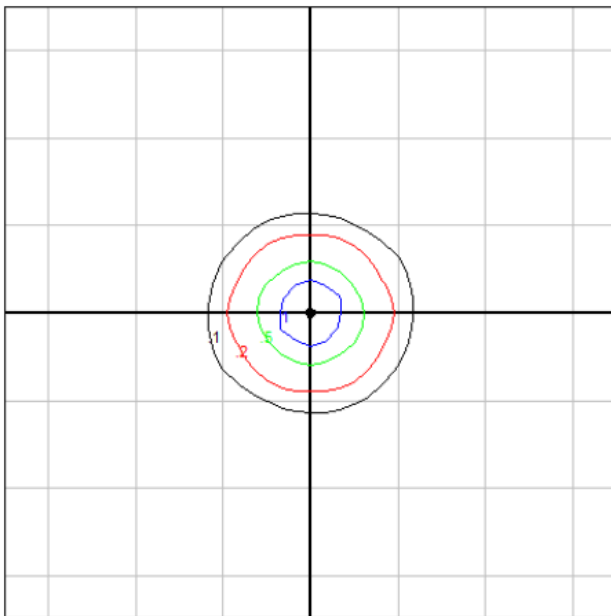

**Initial Lumen Output:** 212 lm  
**Beam Angle:** 60°  
**Ambient Operating Temp:** 3°C to 30°C / 37.4°F to +86°F

**Efficacy:** 35  
**Luminaire Type:** Emergency Battery  
**Certification Standards:** CSA

**Max Candela:** 170.9cd  
**Environmental Rating(s):** Damp location  
**Limited Product Warranty:** 2 years for battery 3 years for fixture



Project:	
Location:	
Model#: SEL-2	Type:
Client:	Qty:
Prepared by:	Date:

LINE DRAWING

Line Drawings

SERIES	DIMENSIONS		
	A	B	C
SEL-2	11.81" 300mm	9.25" 235mm	2.95" 75mm

