

Project:	
Location:	
Model#: ELWWRC	Type:
Client:	Qty:
Prepared by:	Date:

SERIES SPECIFICATIONS




The ELWWRC is a wet location emergency light designed to illuminate the path of egress in environments where this fixture may be in contact with water. This includes two(2) adjustable heads rated at 300 lumens per head.



PERFORMANCE SPECIFICATIONS

Luminance Distribution Chart

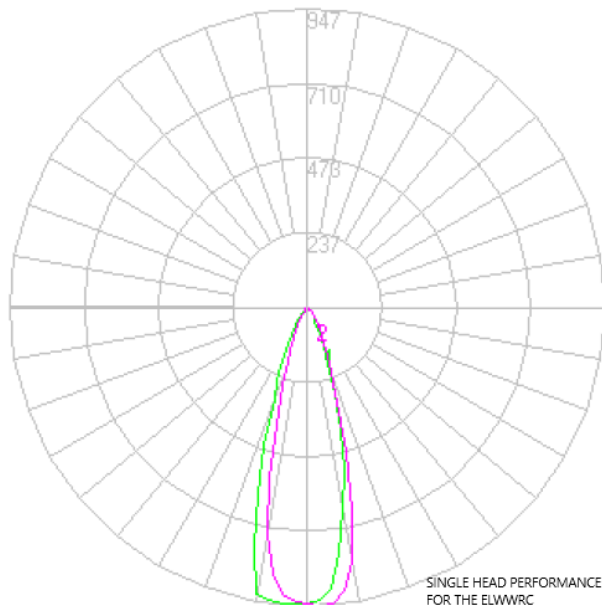

Initial Lumen Output: 2 X 300 lm
Environmental Rating(s): Wet location (0°C to 50°C)
Limited Product Warranty: 2 years for battery 3 years for fixture

Beam Angle: 28.5°
Ambient Operating Temp: 0°C to 50°C / 32°F to +122°F

Luminaire Type: Emergency light
Certification Standards: UL924, C22.2 No. 141-15



Project:	
Location:	
Model#: ELWWRC	Type:
Client:	Qty:
Prepared by:	Date:

LED SPECIFICATIONS

Source Type: LED
Colour Temperature: 5700

CRI: > 80

L70: >54,000 Hrs

ELECTRICAL SPECIFICATIONS

Input Voltage: 120-347V
Current Draw at 347Vac: 45mA
Power Factor at 120Vac: > 0.4
Max Operating Case Temperature: 50?
Short Circuit Protection: YES

Input Frequency: 50/60 Hz
Inrush Current: ~30A
Power Factor at 277Vac: > 0.4
Surge Suppression: YES

Current Draw at 120Vac: 25mA
Max On-Delay: Power Factor at 347Vac:
> 0.4
Over Temperature Protection: YES

EMERGENCY INFORMATION

Input Voltage: 120-347V
Emergency Runtime: >90minutes
Emergency Certifications: UL924

Max Power Input: 3.5W
Battery Type: Ni-cad

Standby Power: 0.95W
Battery Recharge Time: 24hours

PHYSICAL SPECIFICATIONS

Finish Colour: White
Lens Material: Polycarbonate

Mounting: Wall or Ceiling
Weight: 1.24 kg

Housing Material: Polycarbonate

SHIPPING INFORMATION

OrderingCode(s): 0627-8571 ELWWRC
WET LOCATION LED EM LIGHT 120-347
Carton Quantity: 6

Box Quantity: 1
Carton Dimensions (L-W-H): 460 x 330 x
280 mm / 0.3 x 0 x 460 inches

Box Dimensions (L-W-H): 330 x 279 x 76
mm / 13 x 11 x 3 inches
Carton Weight: 7.4

Project:	
Location:	
Model#: ELWWRC	Type:
Client:	Qty:
Prepared by:	Date:

LINE DRAWING

Line Drawings

